# Commercial Flushometer Back Spud Wall-Hung Toilet – 1.0/1.28/1.6 GPF

## **FEATURES**

- Wall-mounted
- Elongated front bowl
- Optional CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating

## **MODELS**

- CT708UV
   Commercial wall-mounted toilet with 1-1/2' back spud inlet, less seat
- CT708UVG
   Commercial wall-mounted toilet with 1-1/2' back spud inlet, less seat with CEFIONTECT ceramic glaze

## ADDITIONAL ITEMS

- SC534 seat
- SC134 seat
- THU111 Retro-fit mounting bolt cap set (4 pcs)

ECOPOWER® FLUSH VALVES		
Concealed 14" x 12"		
*TET2UA31#CP	1.0 GPF	
*TET2LA31#SS	1.28 GPF	
TET2GA31#SS	1.6 GPF	
Cealed 4" x 4"		
*TET3UA31#SS	1.0 GPF	
*TET3LA31#SS	1.28 GPF	
TET3GA31#SS	1.6 GPF	

<sup>\*</sup>WaterSense listed

## COLORS/FINISHES

Standard #01 Cotton





## PRODUCT SPECIFICATION

The wall-mounted, low consumption siphon jet flushing toilet shall be 1.0, 1.28, or 1.6 GPF (3.8, 4.8, or 6.0 LPF) when paired with a flush valve of corresponding flush volume. Toilet shall have optional CEFIONTECT ceramic glaze. Toilet can be mounted at ADA height. Toilet shall be TOTO Model CT708UV\_\_\_\_\_.

## CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant
- Complies with CA Prop 65 warning requirements







To complete a WaterSense listed combination, the bowl must be paired with a flush valve which is EPA WaterSense listed.

## Commercial Flushometer Back Spud Wall-Hung Toilet – 1.0/1.28/1.6 GPF

## **SPECIFICATIONS**


Water Use	1.0/1.28/1.6 GPF (3.8/4.8/6.0 LPF)
Flush System	Siphon Jet Flushing Action
Water Surface	12" x 9-1/4"
Water Pressure	Min: 35 psi (Flowing) Max: 80 psi (Static)
Min. Flow Rate	24 GPM
Trap Diameter	2-1/8"
Trap Seal	2-5/8"
Material	Vitreous China
Warranty	One Year Limited Warranty
Shipping Weight	56 lbs
Shipping Dimensions	27-1/4"L x 15-5/8" W x 17-5/8"H


## **INSTALLATION NOTES**

Note: If carrier bolt doesn't extend/or is flush with china, then use retrofit caps THU111 (sold separately).

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073R

## **DIMENSIONS**

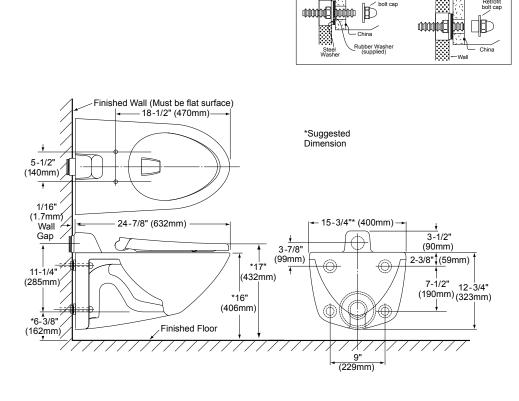

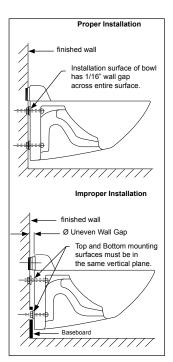



These dimensions and specifications are subject to change without notice