


T65851LF▲




Submitted Model No.: _____


Specific Features: _____

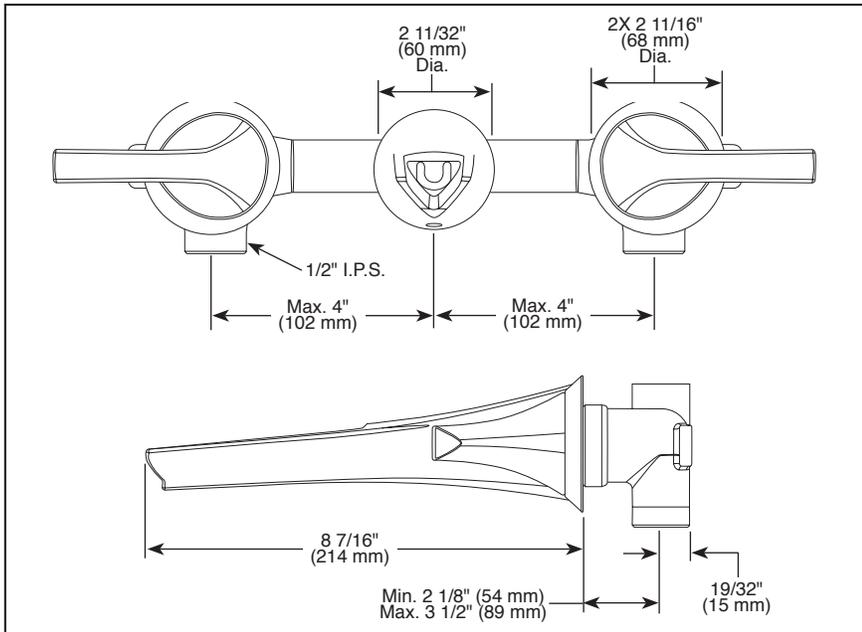


RP72412▲ Grid Strainer w/Overflow
Optional

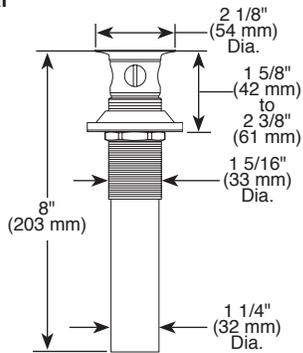


RP72411▲ Grid Strainer w/o Overflow
Optional

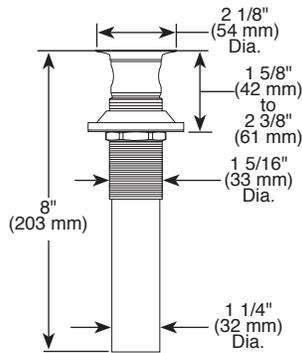

RP72414▲ Push Pop w/Overflow
Optional

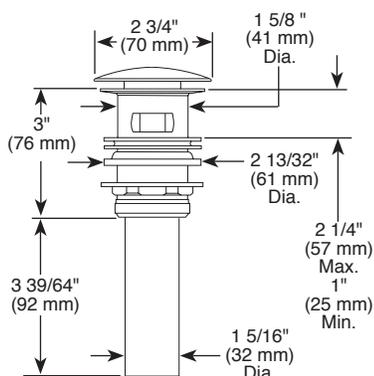

RP72413▲ Push Pop w/o Overflow
Optional

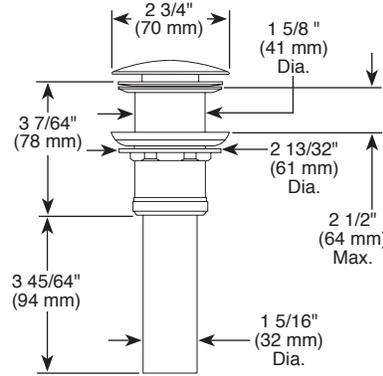

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BRIZO®

WALL MOUNT LAVATORY FAUCET TRIM ONLY

- Sotria™ Bath Collection
- Two Handle Wall-Mounted Lavatory
- 3 Hole Applications
- 8" Centers
- Temperature and Volume Controlled With Handles
- 8 7/16" Solid Metal Spout

STANDARD SPECIFICATIONS:

- Two handle lavatory faucet for concealed mounting on 3 hole applications.
- 8 7/16" solid metal spout.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- 8" Center, 4" distance between holes.
- 1 1/2" recommended hole size.
- Rough-in dimensions: 2 1/8" to 3 1/2".
- 1/2" I.P.S. inlets.
- Optional push button drain assembly or grid strainer available separately.
- Max. 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Trim only; must also order rough (R65800).

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.