



LAVATORY FAUCETS

- Classic Series
- Diamond™ Seal Technology
- Single Handle Deck Mount
- 3 Hole Sink Applications
- 4" Centerset

STANDARD SPECIFICATIONS


- 4" (102 mm) centerset.
- 5" (127 mm) long spout.
- Lever handle. Control mechanism is the diamond embedded ceramic disc cartridge.
- Control handle shall return to neutral position when valve is turned off.
- 3/8" OD. straight. staggered pex supply tubes – 35" (889 mm) and 36" (914 mm) long.
- Models have a maximum 1.5 gpm flowrate @ 60 PSI.

WARRANTY



- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:

- CSA Certified
- Complies to ASME A112.18.1/CSA B125.1
- ADA Compliant and meets Handicapped Accessibility Standard ICC/ANSI A117.1/ADA of less than 5 lbs. operating force
- Verified compliant with 0.25% weighted average Pb content regulations
- EPA WaterSense®

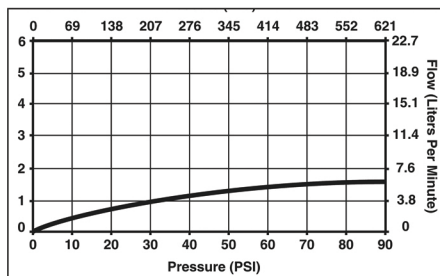

55 E. 111th Street, Indianapolis, Indiana 46280
 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2
 © 2013 Masco Corporation of Indiana



Submitted Model No.: 536-TP-DST

Specific Features: _____

