

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

# **DESCRIPTION**

- · Metal construction with various finishes identified by suffix
- Duralock<sup>™</sup> quick connect installation
- Pullout spray with 68" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- High arc spout provides height and reach to fill or clean large pots while the pull
  out wand provides the maneuverability for cleaning or rinsing

#### **OPERATION**

- · Lever style handle
- · Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

#### **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### **CARTRIDGE**

- 1255™ Duralast™ cartrdige for single-handle faucets
- Engineered polymers, non-ferrous and stainless steel materials


#### **STANDARDS**

- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- ADA for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations






Solidad™ Single Handle High Arc Pull Out Kitchen Faucet

**Models:** CA87559 series 87559 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA.

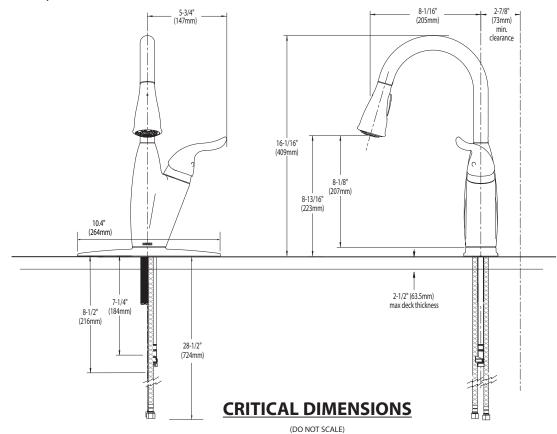


FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

09/21/2015 SPC11852 50/00/01/2178 Released 01



# **Specifications**



# Solidad™ Single Handle High Arc Pull Out Kitchen Faucet

**Models:** CA87559 series 87559 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA.

#### **DESCRIPTION**

- · Metal construction with various finishes identified by suffix
- · Quick connect installation
- Pullout spray with 68" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- High arc spout provides height and reach to fill or clean large pots while the pull out wand provides the maneuverability for cleaning or rinsing

# **OPERATION**

- · Lever style handle
- · Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

# FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

### **CARTRIDGE**


- 1255<sup>™</sup> Duralast<sup>™</sup> cartrdige for single-handle faucets
- Engineered polymers, non-ferrous and stainless steel materials

#### **STANDARDS**

- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- · Meets CalGreen and Georgia SB370 requirements
- ADA for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

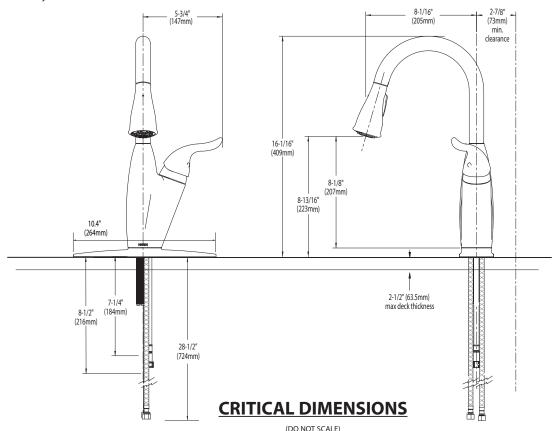

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com


09/21/2015 SPC118/2 50/00/01/21/78 Rehasol 01



Buy it for looks. Buy it for life.®

# **Specifications**





# Solidad™ Single Handle High Arc Pull Out Kitchen Faucet

**Models:** CA87559 series 87559 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA.

# **DESCRIPTION**

- · Metal construction with various finishes identified by suffix
- · Quick connect installation
- Pullout spray with 68" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- High arc spout provides height and reach to fill or clean large pots while the pull
  out wand provides the maneuverability for cleaning or rinsing

# **OPERATION**

- · Lever style handle
- Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pullout or retracted position

#### FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### **CARTRIDGE**


- 1255™ Duralast™ cartrdige for single-handle faucets
- · Engineered polymers, non-ferrous and stainless steel materials

#### **STANDARDS**

- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- · Meets CalGreen and Georgia SB370 requirements
- ADA (for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

# **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

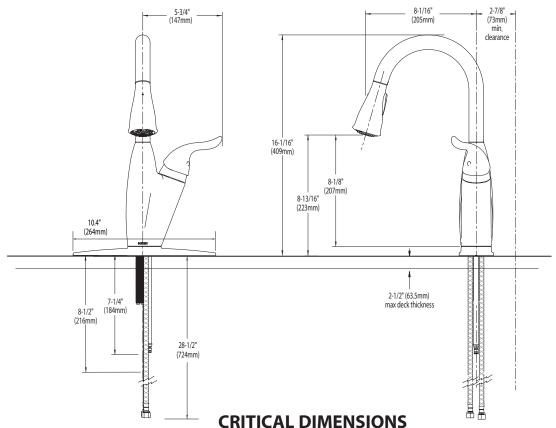

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev. 9/14