


CHILLED DRINKING FOUNTAIN: KEP8AC-SBF-STN

KEP8AC-SBF-STN | 2000102862

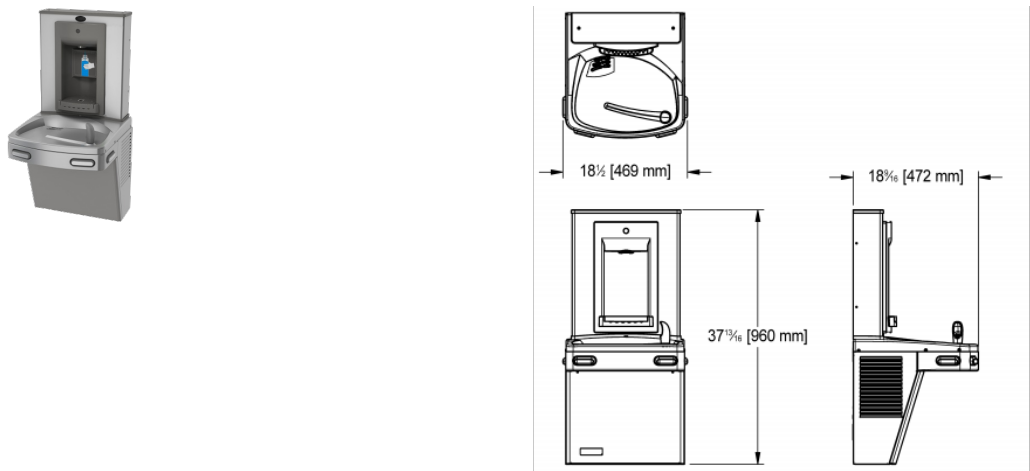

Combination chilled drinking fountain with sports bottle filler. Sports bottle filler cabinet finish is brushed stainless steel. Deep alcove to accommodate for larger diameter containers even if they have a small neck. Waterways are lead-free in materials and construction. Surface mount frame assembly. Units have built-in 100 micron strainer stops particles before they enter the waterway. One piece stainless steel top. Low flow bubbler with flexible guard. Heavy duty galvanized steel frame. Moulded components utilize a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect surfaces from discolouration, odours, and degradation. Included tailpiece is sized to accept either 1 1/2 inch (38 mm) or 1 1/4 inch (32 mm) P-trap (not included).

Unit will comply with wheelchair accessibility when properly installed. Manual fountain activation using anti-microbial push pads. Compressor is hermetically sealed, reciprocating type, single phase, lifetime lubrication. The condenser is cooled with a permanently lubricated fan motor. Stainless steel cooling tank with continuous copper tubing. Factory preset thermostat, (adjustable to compensate for altitude requirements) easily accessible by removal of front panel. R134a refrigerant.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953). Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.

8 gph chiller, stainless steel. Optional filter kit 033926-001.

| TECHNICAL DATA | |
|-------------------------|--------------------------------|
| compressor power | 0.25 hp |
| Cooling capacity | 30.40 liter per hour |
| input supply voltage Hz | 60.00 hertz |
| input supply voltage V | 115.00 volt |
| full load amps | 4.40 ampere |
| gross weight | 33.57 kg |
| inlet diameter | DN 10 |
| material | STAINLESS-STEEL |
| material code | 1.4301 Chrome Nickel steel V2A |
| outlet size | DN 32 |
| Overall front to back | 18 9/16" |
| overall height | 37 13/16" |
| Overall left to right | 18 7/16" |
| total power | 500.00 watt |
| type of mounting | wall mounting |

PROJECT INFORMATION

Item Location

Project Number

Quote Number

Notes

Engineer's Approval



| | |
|----------------------|----------------------|
| water temperature | 10.00 degree celcius |
| Cabinet finish | satın finished |
| motor power | 500.00 watt |
| Type of operation | Manual operation |
| net weight | 0.00 kg |
| Wheelchair compliant | yes |
| Bottle filler | Yes |