



LYNDON®

SINGLE LEVER AND VESSEL FAUCETS



- Cast brass spout
- Ceramic disc valve cartridge
- 3/8" compression braided, stainless steel flexible supply hose
- Lead Free—faucet contains $\leq 0.25\%$ total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/
CSA B125.1/NSF 61/Section 9

EPA WaterSense® High Efficiency
Lavatory Faucet Specification

Certified Compliant with 0.25% Weighted
Average Lead Content Regulations

AVAILABLE FINISHES

Polished Chrome
Brushed Nickel
Matte Black

FINISH CODE

100
144
243

DESCRIPTION

1.5 gpm (5.7 L/min)
Single Lever Faucet
Vessel Faucet
1.2 gpm (4.5 L/min)
Single Lever Faucet
Vessel Faucet

PRODUCT NUMBER

D35109100.XXX
D35109150.XXX
D3510910C.XXX
D3510915C.XXX




ROUGH-IN DIAGRAM
SHOWN ON NEXT PAGE



LYNDON[®]

SINGLE LEVER AND VESSEL FAUCETS

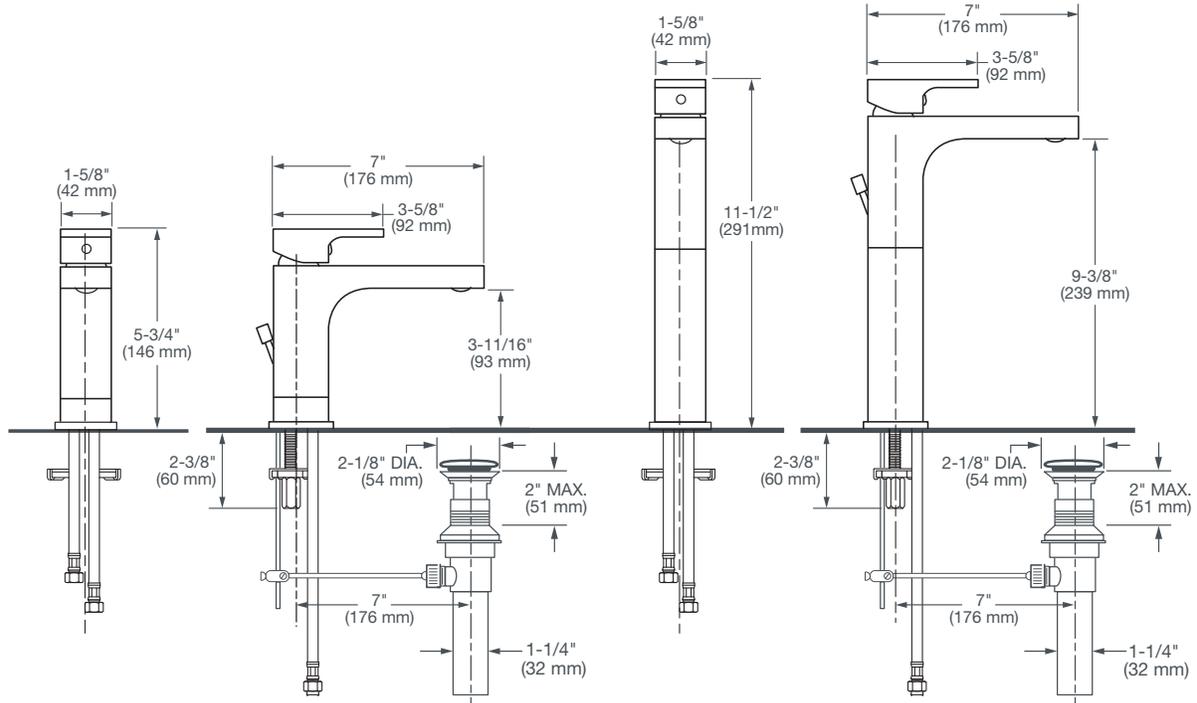

NOTE: MOUNTING HOLES ARE 1-3/8" D. (35 mm)

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL