



SLS-3612-1.5, SLS-3610-1.5 Single Handle Lavatory Faucet
Specification Submittal



Model Numbers		Feature Highlights
□ SLS-3612-1.5 □ SLS-3610-1.5	Single Handle Lavatory Faucet with lift rod and metal drain assembly Single Handle Lavatory Faucet, lift rod and drain not included	 Single hole mount configuration Quarter turn ceramic cartridge 24 inch braided hose water supply connections 6-7/8" height Lift rod and metal drain assembly (SLS-3612-1.5) Standard 1.5 gpm (5.7 L/min) aerator Faucet shall be metal construction, plated in standard polished chrome finish
Finish Options/Modifications		Compliance
□ -0.5	0.5 gpm (1.9 L/min) aerator 1.0 gpm (3.8 L/min) aerator 2.2 gpm (8.3 L/min) aerator	-ASME A112.18.1/CSA B125.1 -NSF/ANSI 61.9; NSF/ANSI 372 -WaterSense 1.5 gpm
Guilix 1.5 ☐ -DP4	4" deck plate	Warranty
 -BBZ -MB -STNNote: Append appr	Brushed Bronze finish Matte Black finish Satin Nickel finish opriate -suffix to model number.	Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.

Dimensions

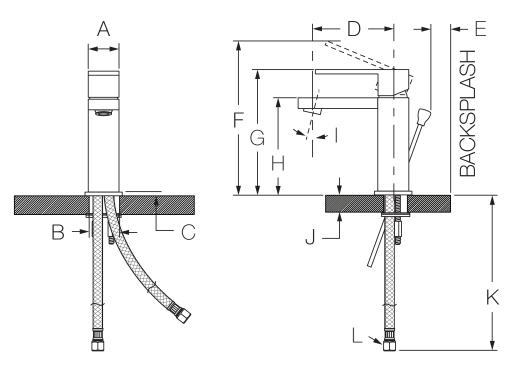

Measurements		
Α	1-11/16", 43 mm	
	Hole Size:	
В	Min. Ø 1-1/4", 32 mm	
	Max. Ø 1-1/2", 38 mm	
С	3/16", 5 mm	
D	4-7/16", 113 mm	
Ε	Min. 1/2", 13 mm	
F	8-7/16", 214 mm	
G	6-7/8", 175 mm	
Н	5-5/16", 135 mm	
Π	12°	
	Deck Thickness Ref.	
J	Min. 7/8", 22 mm	
	Max. 2-1/2", 64 mm	
K	24", 610 mm	
L	(2x) 3/8" compression fitting	

Note: Dimensions subject to change without notice.