



3603-H321-V-TRM, 3603H321TRMTC Hand Shower Trim

Specification Submittal




Feature Highlights	Options/Modifications
 Duro Hand Shower Trim Requires Temptrol® Pressure Balancing Shower Valve Metal lever handle 30" slide bar for hand shower wand Dual checks for backflow protection 60" flexible metal hose 1 mode hand shower wand 2.5 gpm (9.5 L/min) flow restrictor Tub spout and showerhead not included Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3603H321TRMTC) For optional in-line vacuum breaker order p/n EF-109 	 □ -1.5
Model Numbers	□ -L2 Less hand shower wand □ -QD Quick-disconnect on hand shower units
□ 3603-H321-V-TRM Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately □ 3603H321TRMTC Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap	□ -R 60" white vinyl hose in place of 60" metal hose □ -REB Rebuild trim kit, includes TA-10 and TA-4 □ -T724 24" slide bar/grab bar with ADA wand □ -T736 36" slide bar/grab bar with ADA wand □ -T748 48" slide bar/grab bar with ADA wand
Compliance	□ -VB Elevated vacuum breaker□ -VP Vandal resistant escutcheon screws in place of
ASME A112.18.1/CSA B125.1 CUS	standard screws - BBZ Brushed Bronze finish - MB Matte Black finish - STN Satin Nickel finish
Warranty	Sauri Nickei illiisti
Limited Lifetime - to the original end purchaser in	Note: Append appropriate -suffix to model number.

consumer/residential installations.

5 Years - for industrial/commercial installations.

Refer to www.symmons.com/warranty for complete warranty information. Go to www.symmons.com/register to register your Symmons product.

Dimensions

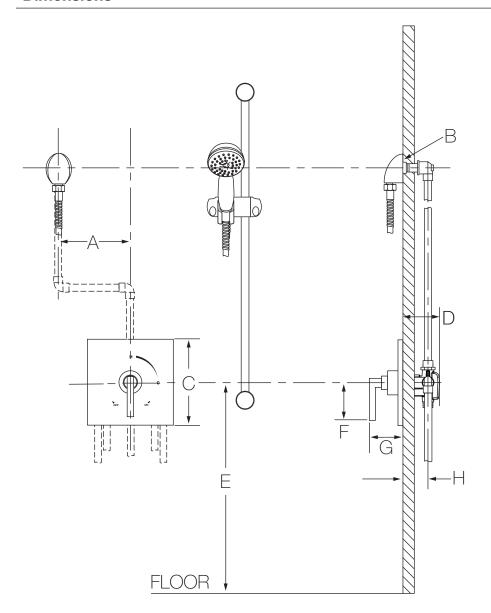

Measurements	
Α	6", 152 mm
	Male 1/2-14 NPT thread
В	must be recessed 1/4" (6 mm)
	from finished wall
С	Sq. 7-1/2", 191 mm
D	3-1/2", 89 mm
Е	Ref. 42", 1067 mm
F	3-1/8", 79 mm
G	3-1/2", 89 mm
Н	Rough-in
	2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see H as reference).
- 4) Dimensions subject to change without notice.