For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

B1-**DL/ B2-**DL/ B3-**DL Speedi Plumb[®] PLUS Braided Toilet Connectors - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- Engineered polymer braided fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability under the harshest water conditions
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- Long wing nuts allow for quick connection and ensure dependable thread engagement

```
• 🕑 No Lead
```

Operating Specifications:

Temperature:	40°- 160° F, intermittent to 180° F
Pressure:	125 PSI maximum

Tubing Diameter: 0.30

0.300" ID (0.550" OD)

MATERIAL SPECIFICATIONS	
Inner Hose	Reinforced PVC
Braiding	PVC coated polyester yarn
Barb	Brass
Ferrule	Stainless steel
Nut	Brass, plated or polypropylene
Washer	Rubber
Compression Nut	Brass, plated
FIP Adaptors	Brass, plated

Part Listing:

B1-6DL F *	3/8" compression x 7/8" ballcock x 6" length
B1-9DL F *	3/8" compression x 7/8" ballcock x 9" length
B1-9DLM F *	3/8" compression x 7/8" ballcock (metal nut) x 9" length
B1-12DL F	3/8" compression x 7/8" ballcock x 12" length
B1-12DL P3	3/8" compression x 7/8" ballcock x 12" length, bagged, 3-pack
B1-12DLM F	3/8" compression x 7/8" ballcock (metal nut) x 12" length
B1-12DLU D	Universal Connector - 3/8" compression x 7/8" ballcock x 12" length with 7/16" &
	1/2" slip-joint & 1/2" FIP adaptors or 7/16" rubber slip nut


* No-Lead N/A

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.



400.339 B1/B2/B3 SPP Braided Toilet Connector - Compression Inlet REV 02/18

©2018 Brasscraft Manufacturing Co.

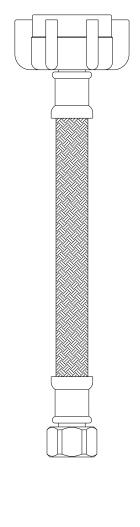

B1-**DL/ B2-**DL/ B3-**DL Speedi Plumb® PLUS Braided Toilet **Connectors - Compression Inlet**

Part Listing	(con't):
--------------	----------

	B1-16DL F	3/8" compression x 7/8" ballcock x 16" length
	B1-16DLM F	3/8" compression x 7/8" ballcock (metal nut) x 16" length
	B1-20DL F	3/8" compression x 7/8" ballcock x 20" length
	B1-20DLM F	3/8" compression x 7/8" ballcock (metal nut) x 20" length
	B2-12DL F	7/16" compression x 7/8" ballcock x 12" length
	B2-20DL F	7/16" compression x 7/8" ballcock x 20" length
	B3-9DL F *	1/2" compression x 7/8" ballcock x 9" length
	B3-12DL F	1/2" compression x 7/8" ballcock x 12" length
	B3-12DLM F	1/2" compression x 7/8" ballcock (metal nut) x 12" length
	B3-20DL F	1/2" compression x 7/8" ballcock x 20" length
* No-Le	ead N/A	
		←A
		B1-12DLM F, B1-20DLM F, & B3-12DLM F with metal nut
		B1-12DLU D with slip joint & FIP adaptors
		← AA

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-6DL	6.0 / 7.0
B1-9DL	9.0 / 10.0
B1-12DL	12.0 / 13.0
B1-16DL	16.0 / 17.0
B1-20DL	20.0 / 21.0

PART DIMENSIONS (Inches)	
Model	DIM. A
B2-12DL	12.0 / 13.0
B2-20DL	20.0 / 21.0
B3-9DL	9.0 / 10.0
B3-12DL	12.0 / 13.0
B3-20DL	20.0 / 21.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6 .
- IAPMO listed to NSF 372 for Low-Lead Compliance
- IAPMO listed to NSF 61/9

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.





©2018 Brasscraft Manufacturing Co.