
American Standard

SINGLE CONTROL SINK FAUCET

Style That Works Better

MODEL NUMBER:

2590 101 Single Control Sink Lever handle. Metal Speed Connect[™] pop-up drain.

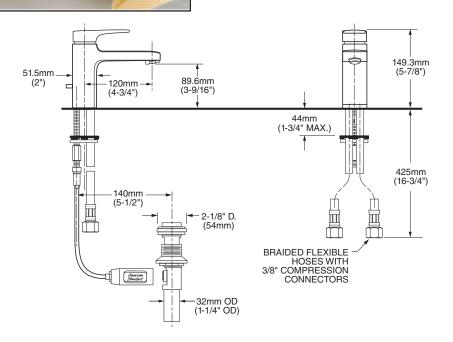

GENERAL DESCRIPTION:

Cast brass body. Multiport washerless ceramic disc valve cartridge provides steady water flow even in low pressure situations. Hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect[™] drain body with 1-1/4" (32mm) tail piece 1.25 gpm(1.5gpm US)/5.7L/min. maximum flow rate at 60 p.s.i. (410kPa). Faucet can be mounted on 4" (102mm) centres using optional escutcheon (2064 101P) or single hole mounting method.

PRODUCT FEATURES:

Brass Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

Multiport Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation, drip-free performance and steady water flow.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Low Lead: Meets NSF Standard 61 lead requirements.

Exclusive Speed Connect[™] Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Choice of Finishes: Available in Polished Chrome or Satin (PVD).

Limited Lifetime Warranty.

American Standard


Style That Works Better

SINGLE CONTROL SINK FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1M NSF 61 IAPMO (cUPC)



		Finish Options	
Product		Polished Chrome	PVD Satin
Number	Description	002	295
2590 101	Single Control Sink faucet. Metal Speed Connect™ pop-up drain.		