



ThermaTouch Control

SPECIFICATIONS – ThermaTouch Control

Construction.....ABS Injection molded plastic
Controllability.....Steam, Light & Sound
Audio Out 1/8" Barrel Jack
Power Supply.....ThermaSol PDM (10-8147)
Display 7" Wide LCD Touch Screen

SPECIFICATIONS – Aromatherapy Steam Head

Construction..... 360 Half Hard Brass
Aromatherapy.....Integral Reservoir
Operation.....Thermal operated retractable outlet

Features:

- Activate last showers settings
- Turn Steam/Light/Music Systems: On or Off
- Control lighting
- Set Time and Temperature Volume settings
- Tranquility Environment: Built-in Sound and Video
- Bluetooth enabled
- Stereo Audio output

Aromatherapy Retractable Steam Head:

- Patented NoTouch™ retractable steam head with integral Aromatherapy well
- Available in 14 finishes
- Sleek new design dispenses steam safely
- Whisper quiet operation

Installation Notes:

- Refer to ThermaSol installation Instructions Doc No. 81190 for complete instructions.
- Requires wall cut out opening of 7-3/8" Wide X 5-3/8" High X 3-1/2" Deep.
- Use Mud Ring for Tile installation and ThermaTouch Control placement (04-8544).
- Ensure 3-1/2" clearance behind the rear of the control for cable clearance.
- The steam head should be installed 12" inches from the floor and 6" from any wall. Locate as far as possible from the bathing seating area or location of the users and not below any fixtures.

Product Specification:

The ThermaTouch Control is a 7" LCD Touchscreen Control used to operate other ThermaSol modules such as Steam Room functions, Light, Sound and Tranquility Visualization, Stereo Audio output and Ethernet connection. The control is approx. 8-1/8" Wide X 6 - 1/8" High X 2 - 1/2" Deep. It requires a wall cutout 7-3/8" Wide X 5-3/8" High and must have a clear in wall depth of 3-1/2".

Shipping Information:

Weight.....1.8 lbs.
Length.....11 in.
Width.....14 in.
Height.....8 in.

Styling Information:


The ThermaTouch Control is available in a sleek recessed style with a black face and finished edge. The Steam Head is available in four trim styles: Traditional; Contemporary; Modern and Regency

Finish Chart:


Select desired finish and replace XX with code. No-Touch Aromatherapy steam head and control finishes.

PC = Polished Chrome
SC = Satin Chrome
PB = Polished Brass
SB = Satin Brass
AB = Antique Brass
COP = Polished Copper
ACOP = Antique Copper

PC = Polished Chrome
SC = Satin Chrome
PB = Polished Brass
SB = Satin Brass
AB = Antique Brass
COP = Polished Copper
ACOP = Antique Copper

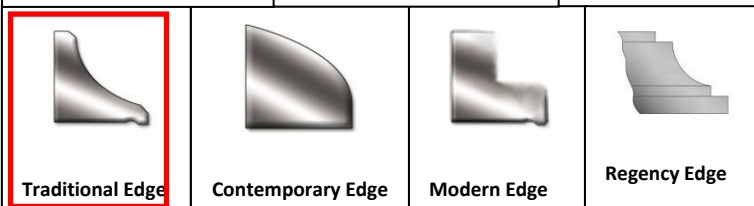


For any further assistance please contact ThermaSol at
800.776.0711 or sales@thermasol.com

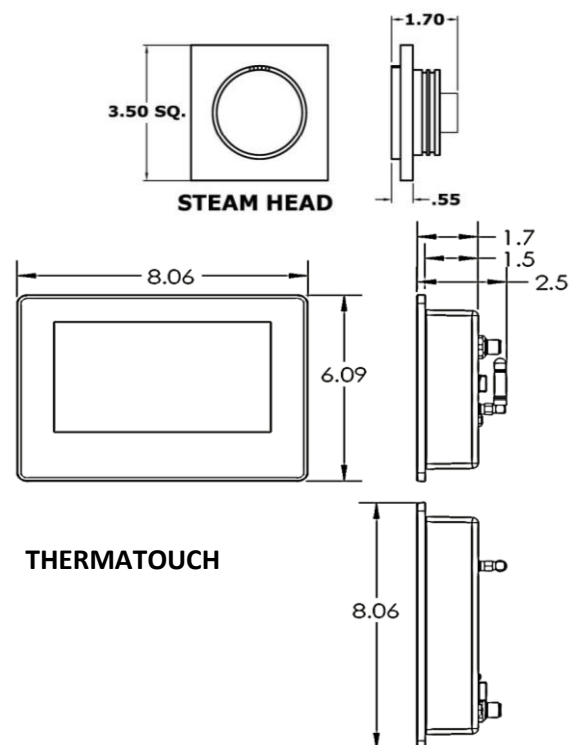

SPECIFICATIONS – POWER DISTRIBUTION MODULE

Construction..... ABS Plastic
Power Supply UL Listed Class 2 & II, (03-7142)
Internal Operating Voltage.....24V DC, 60 Watt

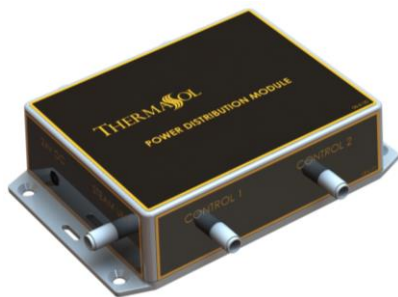

Basic Functions:

- Distributes DC Power and Digital signals to system modules:
- Serenity Light, Sound and Rainhead
- ThermaTouch or Signature Series Controls
- Solitude Wireless Module - SWM-2 (signal only)
- Steam Generator (signal only)

Installation Notes:

Overall size is approximately 5-3/4" long by 3-3/4" wide and 1-1/2" high.
(Without connections) Allow space; 3" Min. for connections. Unit consists of a low voltage (24VDC) circuit board inside a box that can be placed up to 25 feet from the Light and Sound fixture or up to 50 feet from the Steam Generator. A separate universal voltage Power Adapter is provided (03-7142), it requires a standard 110V AC two prong wall outlet.


Product Specification:

5-3/4"L x 3-3/4"W x 1-1/2"H Body.
This PDM requires a ThermaSol Steam Generator and/or Light and Sound System and separate power supply for proper operation.

For any further assistance please contact
ThermaSol at 800.776.0711 or
sales@thermasol.com

Shipping Information:

Weight.....4 lbs.
Length.....11 in.
Width.....14 in.
Height.....8 in.

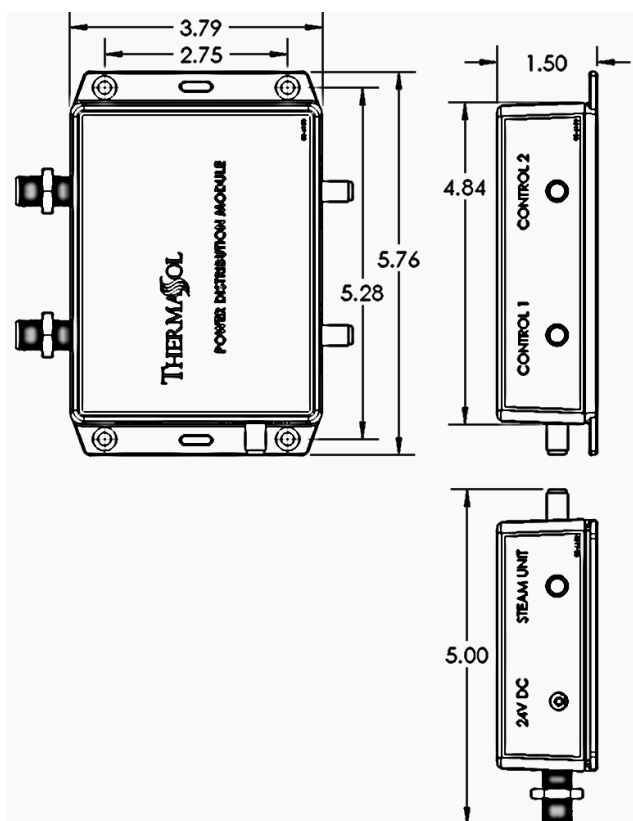



SPECIFICATIONS – Aromatherapy Steam Head
 Construction..... 360 Half Hard Brass
 Aromatherapy..... Integral Reservoir
 Operation..... Thermal operated retractable outlet

Contemporary – Modern Recessed – **Traditional** – Regency

Aromatherapy Retractable Steam Head Basic Operation:


- Patented NoTouch™ retractable steam head with integral Aromatherapy well
- Available in 4 Styles and 14 Finishes
- Sleek new design dispenses steam safely
- Whisper quiet operation

Installation Notes:

The steam head should be installed 12” inches from the floor and 6” from any wall. Locate as far as possible from the bathing seating area or location of the users and not below any fixtures.

Product Specification:

The Steam Head shall be made from half hard Brass, includes the ability to open and close automatically and incorporates an Aromatherapy reservoir.

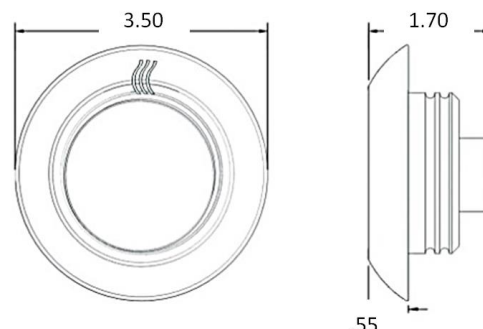

Shipping Information:

Weight..... 2 lbs.
 Length.....12 in.
 Width.....12 in.
 Height.....6 in.




Contemporary
Edge



Modern Recessed Edge



Traditional Edge



Regency Edge

Finish Chart:

Select desired finish and replace XX with code. No-Touch Aromatherapy steam head finishes.

PC = Polished Chrome
 SC = Satin Chrome
 PB = Polished Brass
 SB = Satin Brass
 AB = Antique Brass
 COP = Polished Copper
 ACOP = Antique Copper

PN = Polished Nickel
 SN = Satin Nickel
 BN = Black Nickel
 AN = Antique Nickel
 PG = Polished Gold
 ORB = Oil Rubbed Bronze
 WHT = White

For any further assistance please contact
 ThermaSol at 800.776.0711 or
sales@thermasol.com