

Submitted Model No.:

Specific Features:


BRIZO

LAVATORY FAUCETS


- Odin[™] Bath Collection
- Two Handle Wall-Mounted Lavatory

STANDARD SPECIFICATIONS:


- Max flow rate: 1.50 GPM @ 60 PSI, 5.68 L/Min @ 414 kPa.
- Max flow rate (ECO models only): 1.20 GPM @ 60 PSI, 4.54 L/Min @ 414 kPa.
- Three hole mount.
- Ceramic cartridge.
- Spout features hidden water-efficient laminar flow aerator.

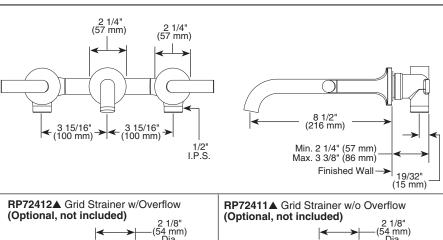


54 mm) Dia. 1 5/8" -(42 mm) 1 to 2 3/8" (61 mm) 1 5/16" (33 mm) Dia. (203 mm) 1 1/4" (32 mm) Dia.



RP72413▲ Push Pop w/o Overflow





WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1ASME A112.18.2 / CSA B125.2
- ICC/ANSI A117.1 Indicates compliance to
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations

▲ Designate proper finish suffix