

## DESCRIPTION

- Metal construction with various finishes identified by suffix

## OPERATION


- 180° of rotation with stops
- Detents at each flow position
- Rotary 180° handle operation

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

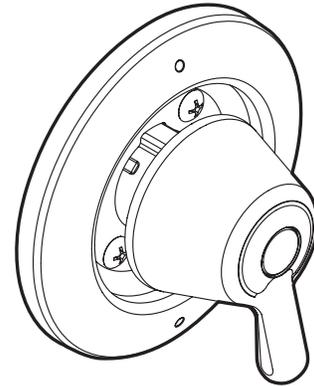


## Two/Three Function Transfer Valve Trim Kit



**Models:** T4171 series

**Valve:** 3372 or 3375

### Thick Wall Installation

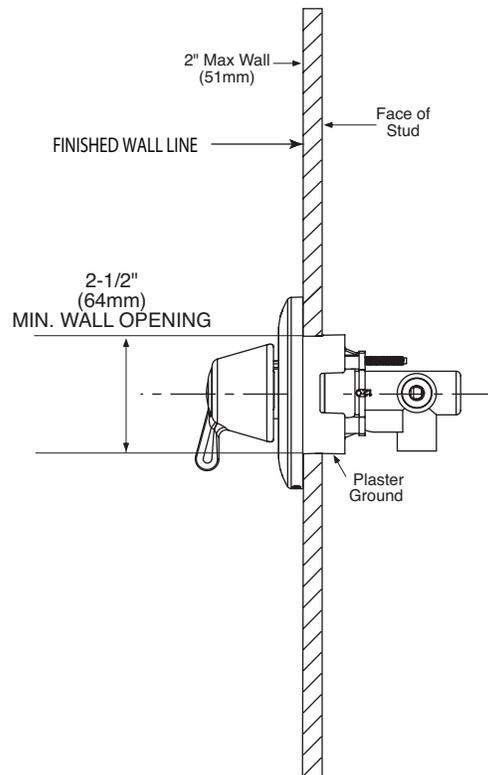

### Thin Wall Installation

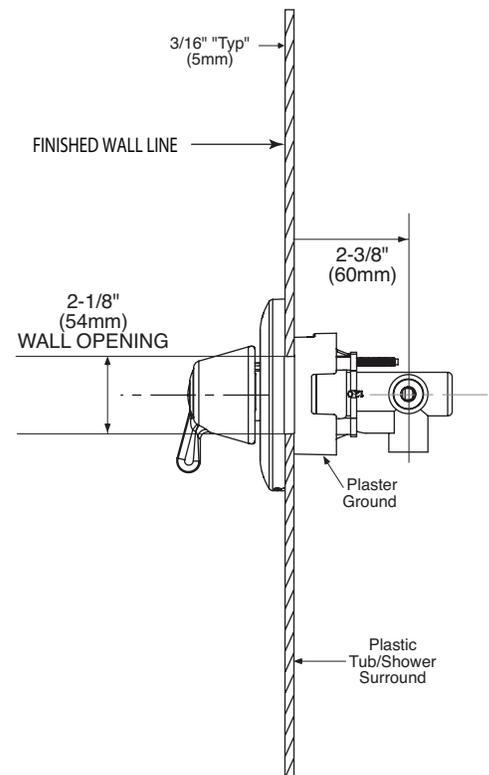

## CRITICAL DIMENSIONS

(DO NOT SCALE)