

TTMR-BK ThermaTouch Control

Rough-In Guide





ThermaTouch Control

Features:


- Activate last showers settings
- Turn Steam/Light/Music Systems: On or Off
- Control lighting
- Set Time and Temperature Volume settings
- Tranguility Environment: Built-in Sound and Video
- Bluetooth enabled
- Stereo Audio output

Installation Notes:

- Refer to ThermaSol installation Instructions Doc No. 81190 for complete instructions.
- Requires wall cut out opening of 7-3/8" Wide X 5-3/8" High X 3-1/2" Deep.
- Use Mud Ring for Tile installation and ThermaTouch Control placement (04-8544).
- Ensure 3-1/2" clearance behind the rear of the control for cable clearance.
- The steam head should be installed 12" inches from the floor and 6" from any wall. Locate as far as possible from the bathing seating area or location of the users and not below any fixtures.

Product Specification:

The ThermaTouch Control is a 7" LCD Touchscreen Control used to operate other ThermaSol modules such as Steam Room functions, Light, Sound and Tranquility Visualization, Stereo Audio output and Ethernet connection. The control is approx. 8-1/8" Wide X 6 – 1/8" High X 2 –1/2" Deep. It requires a wall cutout 7-3/8" Wide X 5-3/8" High and must have a clear in wall depth of 3-1/2".

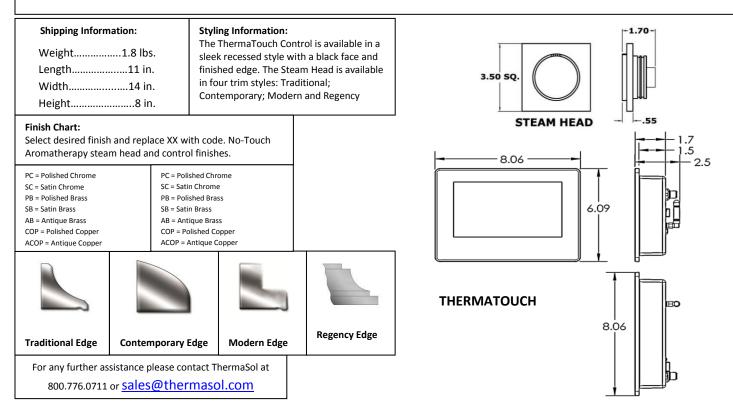

Construction......ABS Injection molded plastic Controllability.....Steam, Light & Sound Audio Out1/8" Barrel Jack Power Supply......ThermaSol PDM (10-8147) Display7" Wide LCD Touch Screen


SPECIFICATIONS – ThermaTouch Control

Aromatherapy Retractable Steam Head:

- Patented NoTouch™ retractable steam head with integral Aromatherapy well
- Available in 14 finishes
- Sleek new design dispenses steam safely
- Whisper quiet operation







SPECIFICATIONS – POWER DISTRIBUTION MODULE

Construction	ABS Plastic
Power Supply	UL Listed Class 2 & II, (03-7142)
Internal Operating Voltage	

Basic Functions:

- Distributes DC Power and Digital signals to system modules:
- Serenity Light, Sound and Rainhead
- ThermaTouch or Signature Series Controls
- Solitude Wireless Module SWM-2 (signal only)
- Steam Generator (signal only)

Installation Notes:

Overall size is approximately 5-3/4" long by 3-3/4" wide and 1-1/2" high. (Without connections) Allow space; 3" Min. for connections. Unit consists of a low voltage (24VDC) circuit board inside a box that can be placed up to 25 feet from the Light and Sound fixture or up to 50 feet from the Steam Generator. A separate universal voltage Power Adapter is provided (03-7142), it requires a standard 110V AC two prong wall outlet.

Product Specification:

5-3/4"L x 3-3/4"W x 1-1/2"H Body. This PDM requires a Thermasol Steam Generator and/or Light and Sound System and separate power supply for proper operation.

For any further assistance please contact ThermaSol at 800.776.0711 or <u>sales@thermasol.com</u>

Shipping Information:

Weight	4 lbs.
Length	11 in.
Width	14 in.
Height	8 in.

