

*There is more than 1 version of this model.
Page down to identify the version you have.*

DESCRIPTION

- Metal construction
- Designed to be installed on decks up to 1-3/8" (35mm) on 10" centers

OPERATION

- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

FLOW

- Designed to deliver 16 gpm at 45 psi. (60L/min)

CARTRIDGE

- Nonmetallic and stainless steel materials


STANDARDS

- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein
- ADA  for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

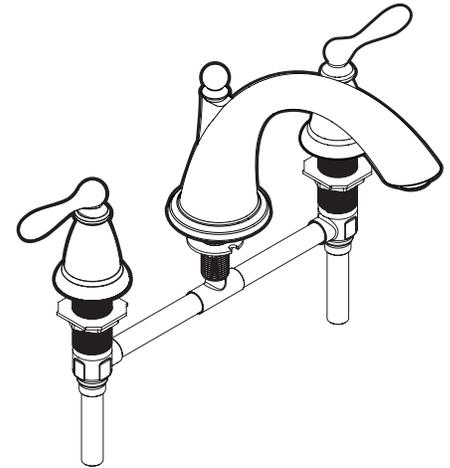

CALDWELL™
Two-Handle Roman Tub
Faucet Trim

Models: 86440 series

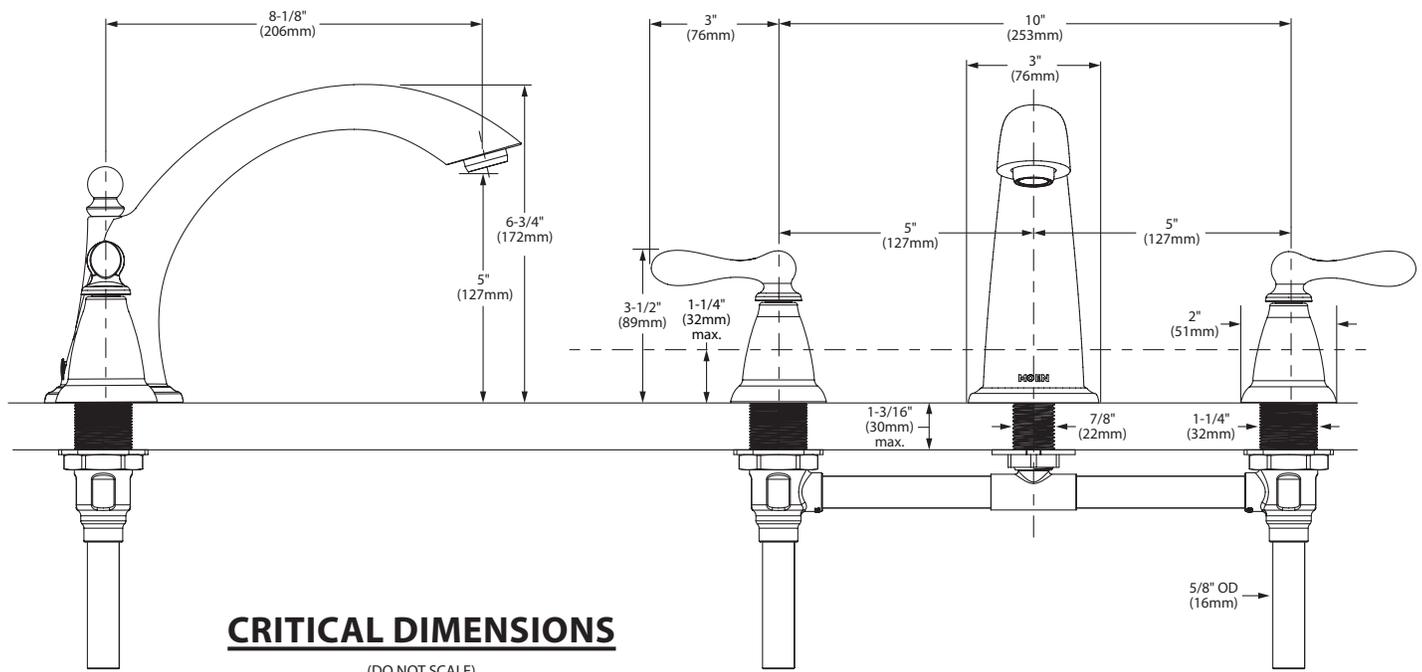

DESCRIPTION

- Metal construction
- Designed to be installed on decks up to 1-7/8" (48mm) on 10" centers

OPERATION

- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

FLOW

- Designed to deliver 16 gpm at 45 psi. (60L/min)

CARTRIDGE


- Nonmetallic and stainless steel materials

STANDARDS

- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein
- ADA ♿ for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

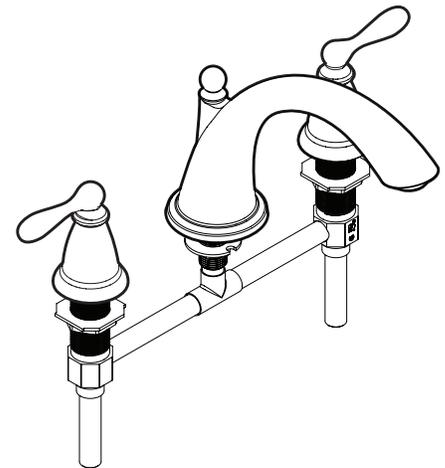

CALDWELL™
Two-Handle Roman Tub
Faucet Trim

Models: 86440 series

