Weymouth® Technical Specification Decorative Tank Lever YB8401


Stock Numbers:

- YB8401BN Decorative Tank Lever Brushed Nickel Finish
- □ YB8401CH Decorative Tank Lever Chrome Finish
- YB8401ORB Decorative Tank Lever
 Oil Rubbed Bronze Finish
- YB8401NL Decorative Tank Lever Polished Nickel Finish
- YB8401BG Decorative Tank Lever Brushed Gold

Materials:

Tank Levers are constructed of zinc. Arm mechanism is brass.

Dimensions:

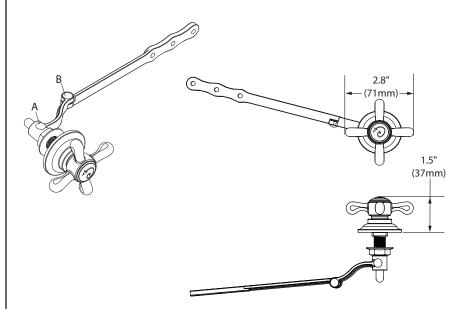

Installation Instructions:

- Remove existing tank lever.
- 2. Remove the brass arm mechanism from the new tank lever by loosening screw A.
- 3. Position the new tank lever through the tank hole. The tank lever handle should be pointing away from the toilet bowl.
- Install the brass nut inside the tank and tighten. Depending on the curvature of the tank, there might be a slight gap between the outside of the tank and the base of the lever.
- 5. Loosen, but do not remove screw on the arm mechanism.
- Tighten screw A.
- 7. Adjust the brass arm mechanism so it does not come in contact with the tank wall or any part of the flush mechanism parts inside the tank.
- 8. Tighten the adjustment screw (screw B) on the brass arm mechanism
- Attach the flapper valve chain to one of the three holes provided slots on the brass arm.
- 10. Make sure that the arm does not activate, and no water is leaking through the flapper valve when the handle is in its normal position, (not flushing).

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:	_ Tank Lever
By Moen Incorporated	



25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM

© 2018 Moen Incorporated. Moen is a registered trademark and Voss is a trademark of Moen Incorporated. All rights reserved.