

# CST746CEMF(R)G.10


Drake® Close Coupled Toilet, 1.28 & 0.8 GPF, 10" Rough-In

## SPECIFICATIONS

Water Use	1.28 & 0.8 GPF (4.8 & 3.0 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/2"
Rough-in	10"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT746CUFG.10 64 lbs.
	ST746EMA 35 lbs.
Shipping Dimensions	CT746CUFG.10 18-3/4" L x 10-1/2" W x 18-1/8" H
	ST746EMA 18-3/4" L x 8-3/8" W x 16" H


## INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

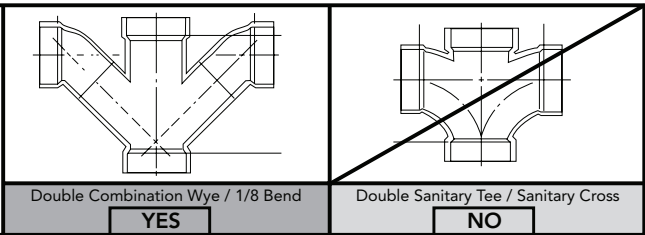

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 10" rough-in distance.

## DIMENSIONS

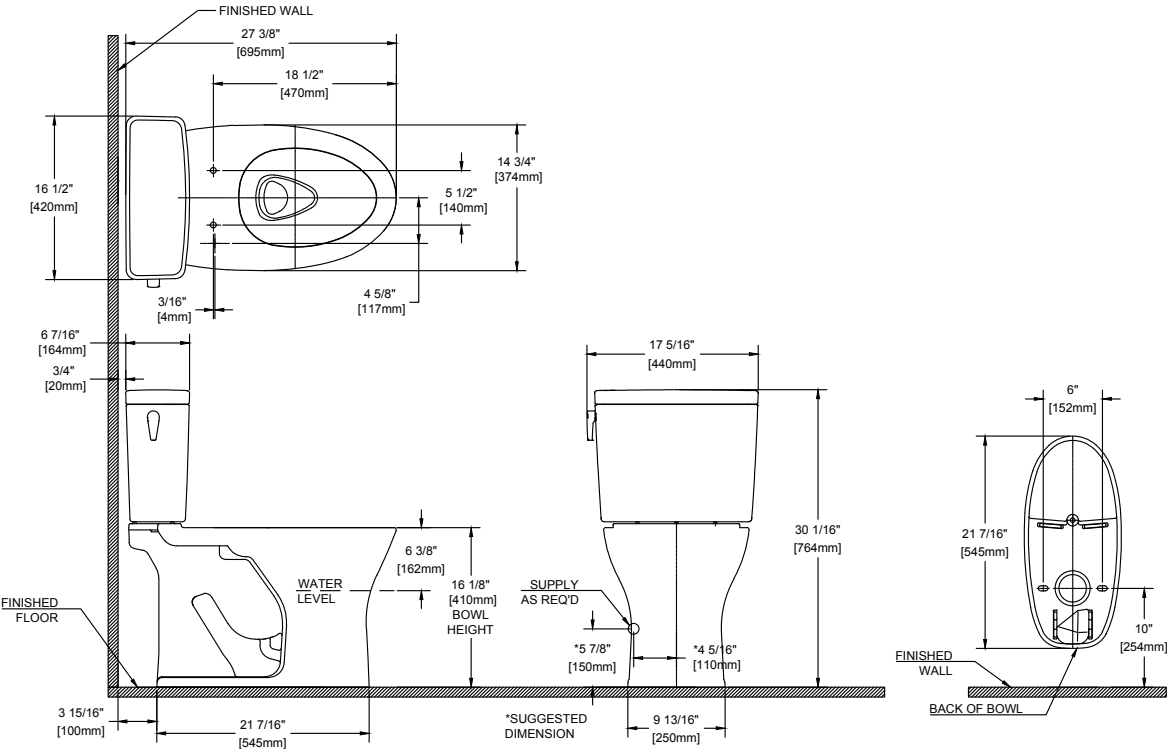

**TOTO®**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | [www.totousa.com](http://www.totousa.com) | © TOTO USA

# SS-01549 v.03