

Bryant® Oval

Bathroom Sink **K-2699-4**

Features

- 4" (102 mm) centerset faucet holes.
- Oval basin.
- Overflow drain.

Material

Vitreous china.

Installation

• Drop-in.

Recommended Products/Accessories

K-9018 P-Trap K-7129-A Drain K-23726 Drain treatment K-23725 Cast iron cleaner



ADA CSA B651 OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Code	Description
0	White
96	Biscuit
47	Almond
NY	Dune
G9	Sandbar
33	Mexican Sand™
58	Thunder™ Grey
7	Black Black™
	0 96 47 NY G9 33 58







Bryant® Oval

Bathroom Sink K-2699-4

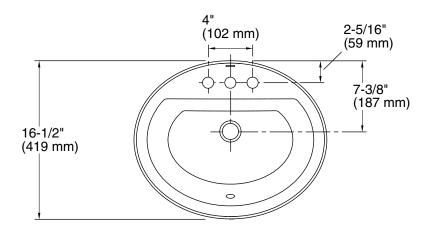

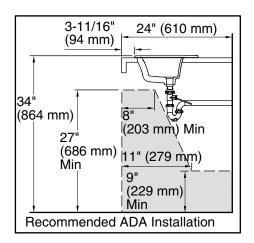

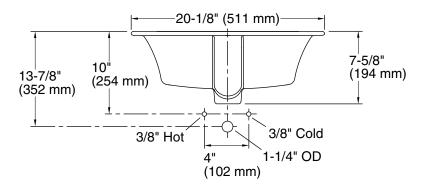

Technical Information

All product dimensions are nominal.

Installation: Drop-in

Bowl area: Length: 17-3/8" (441 mm)

Width: 11-1/8" (283 mm)

Water depth: 5-5/8" (143 mm)

Number of deck

holes:

Faucet hole spacing: 4" (102 mm)
Faucet hole(s): 1-1/4" (32 mm)

Faucet hole(s): 1-1/4" (32 mm)
Drain hole: 1-3/4" (44 mm)

Template: 1155261-7, required, included

Notes

Install this product according to the installation instructions.

Spout must be 5" (12.7 cm) long (min) for adequate clearance into the lavatory when installed with the centerline as shown.

Spout must be tall enough to clear 3" (7.6 cm) rim height and provide a 1" (2.5 cm) air gap per ASME A112.1.1.

NOTICE: Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-4-KOHLER). Kohler Co. is not responsible for cutout errors when the incorrect cut-out template is used.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

