

### DESCRIPTION

- Various finishes identified by suffix
- Handshower with Magnetix™ docking
- 59" double interlock spiral hose (metal), for Chrome only
- Assembled with two check valves for backflow prevention
- Adjustable bracket

### OPERATION

- Six function
- Wall bracket rotates to adjust angle of handshower

### FLOW


- Designed to deliver 1.75 gpm (6.62 L/min) max. at 60 psi  
*(for models manufactured after 3/1/18)*
- Designed to deliver 2.0 gpm (7.6 L/min) max. at 60 psi  
*(for models manufactured before 3/1/18)*

### STANDARDS

- Third party certified to: WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

### WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

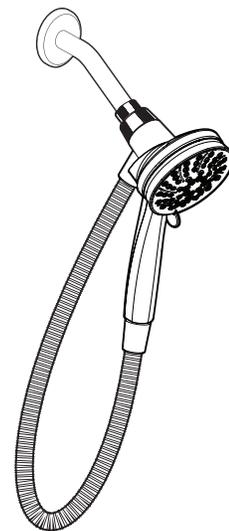

**Attract™  
Handshower  
with Bracket & Hose**

**Models:** 26000 series

