


SensoWash Starck shower-toilet seat for Starck 2, Starck 3 and Darling New* # 610000001040100

|< 14 5/8" Inch >|



SensoWash Starck shower-toilet seat for Starck 2, Starck 3 and Darling New*	Dimension	Weight	Order number
remote control included, power actuated lid and seat, rear-, front and oscillating wash, individual adjustment of water-, air-and seat surface temperature as well as nozzle position and jet strength, self-cleaning wand, 2 individually programmable user profiles, night light, Quick release: easy seat unit removal and attachment, on / off-button, cUPC listed, cEGS/IAPMO®			
Colors			
00 White			
Variant			
AC 100 - 120V 50 - 60Hz, USA, Kanada	14 5/8" x 20 1/4" Ir	nch 12.6 lb	610000001040100
Infobox			
More information available at www.sensowash.com, Install a wammol/l (\geq 14° dH or 24° fH)., Complies with following standard CSA C22.2 No. 68-14 and CSA C22.2 No. 64-14			
Suitable products			
Two-Piece toilet (without tank), suitable for SensoWash Starck, syphonic, 12" rough-in, vertical outlet, cUPC listed, 1.28 gpf, 14 5/8" x 27 3/4" Inch	14 5/8" x 27 3/4" Ir	nch	212501
One-Piece toilet suitable for SensoWash Starck, syphonic, 12" rough-in, with Single Flush mechanism, with side lever, 3" flapper valve, vertical outlet, cUPC listed, 1.28 gpf, 14 $5/8$ " x 28 $1/8$ " Inch	14 5/8" x 28 1/8" Ir	nch	212001
Toilet wall-mounted washdown model, suitable for SensoWash Starck, Durafix included, cUPC listed, 14 1/5" x 24 3/8" Inch	14 1/5" x 24 3/8" Ir	nch	222609
Toilet wall-mounted washdown model, Durafix included, suitable for SensoWash Starck, cUPC listed, 14 3/5" x 24 5/8" Inch	14 3/5" x 24 5/8" Ir	nch	254409
One-Piece toilet back-to-wall, syphonic, 12" rough-in, with Single Flush piston valve, top flush, suitable for SensoWash Starck, vertical outlet, cUPC listed, 1.28 gpf, 15 3/4" x 28 1/8" Inch	15 3/4" x 28 1/8" Ir	nch	212301

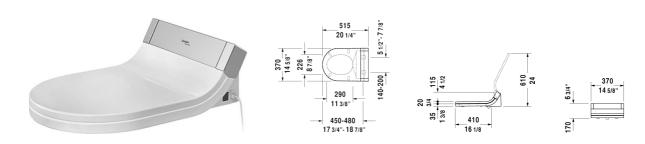

SensoWash Starck shower-toilet seat for Starck 2, Starck 3 and Darling New* # 610000001040100

|< 14 5/8" Inch >|

Two-Piece toilet (without tank), suitable for SensoWash Starck, syphonic, 12" rough-in, vertical outlet, cUPC listed, 1.28 gpf, 14 $5/8$ " x 27 $1/2$ " Inch	14 5/8" x 27 1/2" Inch	212601
Toilet wall-mounted washdown model, Durafix included, suitable for SensoWash Starck, cUPC listed, 14 1/8" x 24 3/8" Inch	14 1/8" x 24 3/8" Inch	253309
Toilet close-coupled (without tank), washdown model, suitable for SensoWash Starck, hardware included, cUPC listed, 14 3/4" x 28 3/8" Inch	14 3/4" x 28 3/8" Inch	212909
Toilet close-coupled (without tank), washdown model, suitable for SensoWash Starck, hardware included, cUPC listed, 14 5/8" x 27 3/4" Inch	14 5/8" x 27 3/4" Inch	214109
One-Piece toilet suitable for SensoWash Starck, syphonic, 12" rough-in, with Single Flush piston valve, top flush, vertical outlet, cUPC listed, 1.28 gpf, 14 3/4" x 28 1/8" Inch	14 3/4" x 28 1/8" Inch	213301
One-Piece toilet Duravit Rimless® rimless, syphonic, 12" rough-in, vertical outlet, suitable for SensoWash Starck, cUPC listed, 14 1/8" x 28 3/4" Inch	14 1/8" x 28 3/4" Inch	217301

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.