



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Brass construction
- Cold expansion Pex connections
- Pressure balancing, four port, cycle valve

## OPERATION

- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintain selected discharge temperature to  $\pm 3^{\circ}\text{F}$

## CARTRIDGE


- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1 and ASSE 1016, all applicable requirements referenced therein
- Moen's Posi-Temp® and Moentrol® valves with graphite composite spools combined with Moen's Eco-performance showerheads meet the performance requirements of pressure and temperature variation of ASSE1016 when tested as low as 1.5 gpm
- ASTM F-1960 - Standard specification for cold expansion fittings with PEX reinforcing rings for use with Pex tubing

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

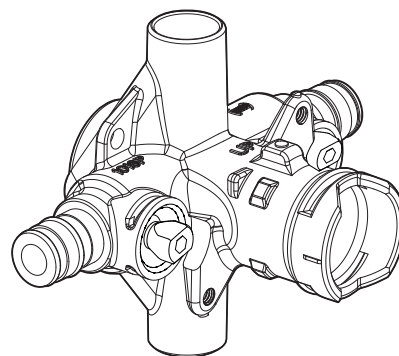

## POSI-TEMP® VALVE Pressure-Balancing Valve with cold expansion Pex Connection

### Models:

62365 (cold expansion Pex without stops),  
62385 (cold expansion Pex with stops)

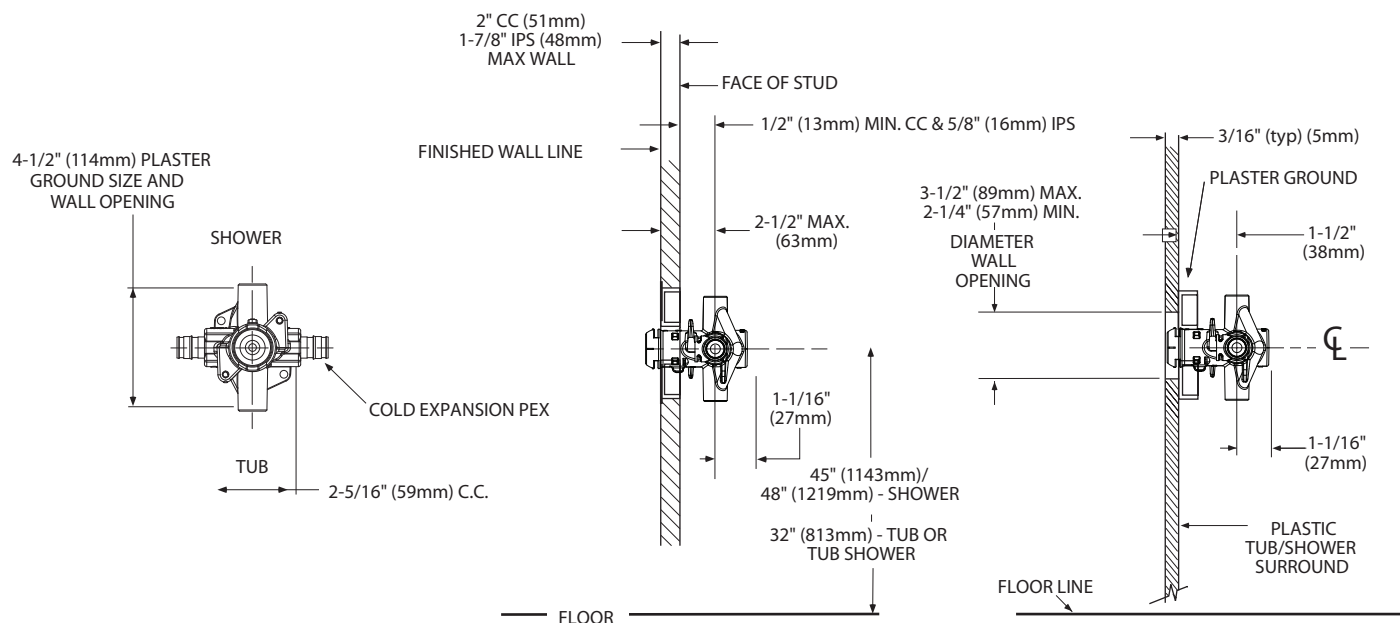

## CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)