

**SERIN™ 60" x 32" DROP-IN/BUILT-IN  
BATHING POOL**

- High Gloss Acrylic with fiberglass reinforcement
- Centre drain
- Dual accessory deck area
- Safety-textured tub bottom pattern

☐ **3581 002**

**Nominal Dimensions:**

60" x 32" x 23"

(1524 x 813 x 584mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- CAN/CSA B45 Series
- CAN/ULC-S102 Flame Spread and Smoke Developed

**NOTE:** This bathtub is designed to be installed above floor level




**To Be Specified - Required:**

- ☐ Colour: (specify colour)
- ☐ Universal Drain: 1583 470 (specify finish)
- ☐ Bath Faucet\* (specify finish)


\* See faucet section for models available

**NOTE:** Roughing-in dimensions and product specifications shown on reverse side of page.

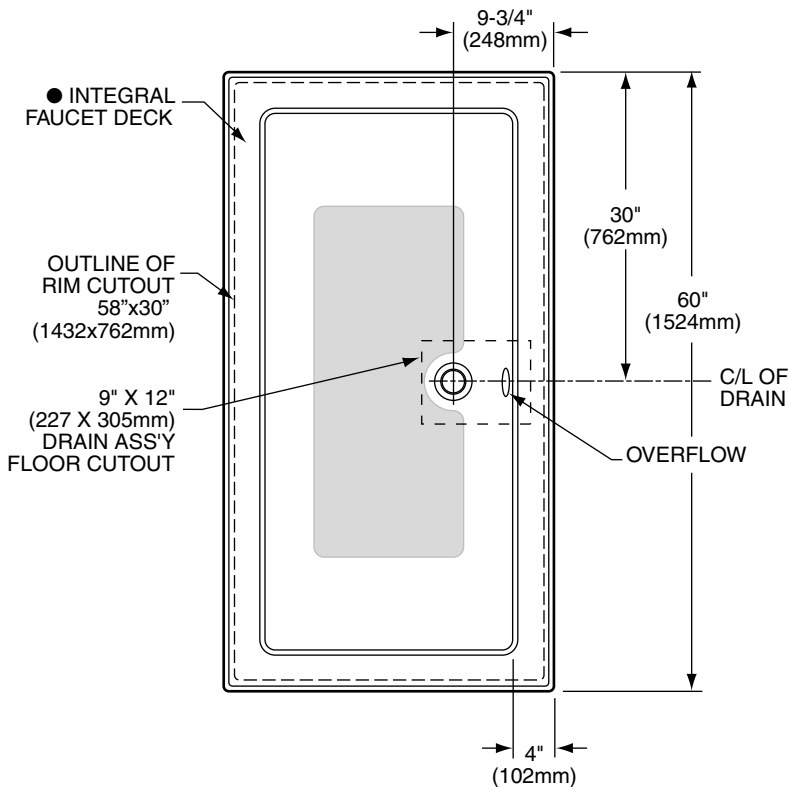

## GENERAL SPECIFICATIONS FOR 3581 002 BATHING POOL

INSTALLED SIZE	1524 x 813 x 584mm (60 x 32 x 23 In.)
WEIGHT	57 Lbs. (26 Kg.)
WEIGHT w/WATER	597 Lbs. (271 Kg.)
GALLONS TO OVERFLOW	54 Gal. (246 L.)
BATHING WELL AT SUMP	965 x 470 mm (38 x 18-1/2 In.)
BATHING WELL AT RIM	1321 x 610 mm (52 x 24 In.)
WATER DEPTH TO OVERFLOW	384 mm (15-1/8)
FLOOR LOADING	45 Lbs./Sq.Ft. (219 Kg./Sq. m)
(PROJECTED AREA)	
PTS.	15.6
CUBE (Ft <sup>3</sup> )	29.1

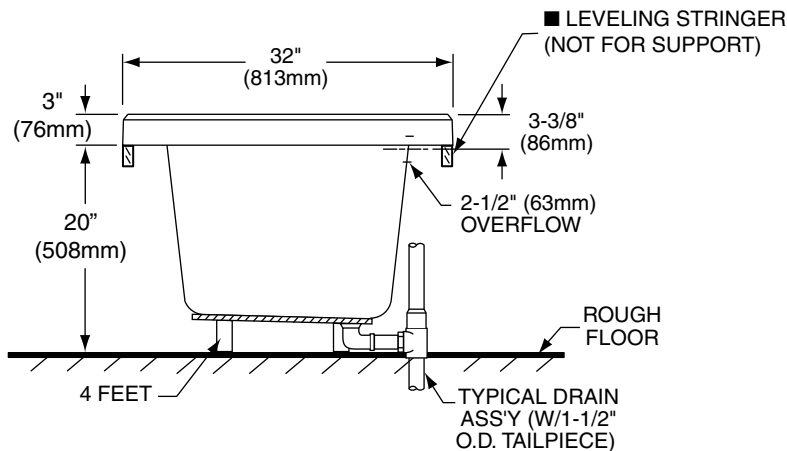

\* ALL DIMENSIONS MAY VARY  $\pm 1/4"$  (6mm)

## NOTES:

- BATH TO BE INSTALLED ABOVE FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY 4 FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.
- IF INSTALLING A DECK-MOUNTED FAUCET, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.