

Aquia® IV Close Coupled Toilet, 1.28 & 0.8 GPF

FEATURES

- DynaMax™ Tornado Flush® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 & 0.8 GPF (4.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Completely skirted design for a sleek and understated look that's easier to clean
- Specially designed to accommodate a WASHLET®+
- Elongated front bowl, seat and tank set
- Chrome push-button
- 12" Rough-in

MODELS

- **MS446124CEMGA** (#01, #12, #03, #11)
With CEFIONTECT ceramic glaze and Auto Flush, includes seat SS124
- **MS446124CEMG** (#01, #12, #03, #11)
Same as above but without Auto Flush
- **MS446124CEM** (#51)
Without CEFIONTECT ceramic glaze & includes seat SS124

COMPONENTS

- **CT446CUGT40**
Elongated bowl with CEFIONTECT
- **CT446CUT40**
Elongated bowl without CEFIONTECT
- **ST446EMA**
Tank and cover only
- **SS124**
SoftClose Seat

Optional Components

- **SS234**
SoftClose Seat
- **TSU08W.10**
10" Unifit Rough-In
- **TSU08W.14**
14" Unifit Rough-In
- **9AU321-A**
WASHLET® adapter
(Required for WASHLET installation)

COLORS/FINISHES

- #01 Cotton
 - #12 Sedona Beige
- Made to Order**
- #03 Bone
 - #11 Colonial White
 - #51 Ebony
(Without CEFIONTECT)



 **DynaMax
Tornado Flush**

 **Skirted Design**

 **CEFIONTECT**

PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DynaMax Tornado Flush toilet shall be dual flush 1.28 GPF/0.8 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, complete skirted bowl and chrome push-button. Toilet shall be TOTO Model MS446124CEM_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



MS446124CEMG(A)


Aquia® IV Close Coupled Toilet, 1.28 & 0.8 GPF

SPECIFICATIONS

Water Use	1.28 & 0.8 GPF (4.8 & 3.0 LPF)
Flush System	DynaMax™ Tornado Flush®
Min. Water Pressure	8 psi (Flowing)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/2"
Rough-in	12" (10" & 14" Optional)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT446CU(G)T40 85 lbs ST446EMA 29 lbs
Shipping Dimensions	CT446CU(G)T40 30-3/4" L x 17-3/8" W x 20-1/2" H ST446EMA 17-1/4" L x 7-7/8" W x 17-1/2" H


INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

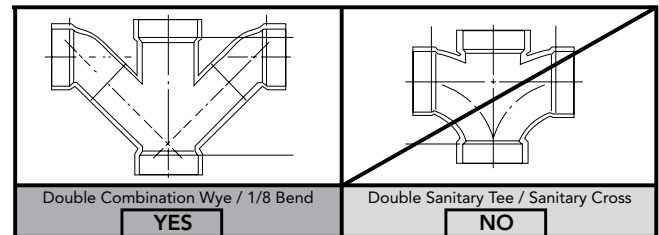

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

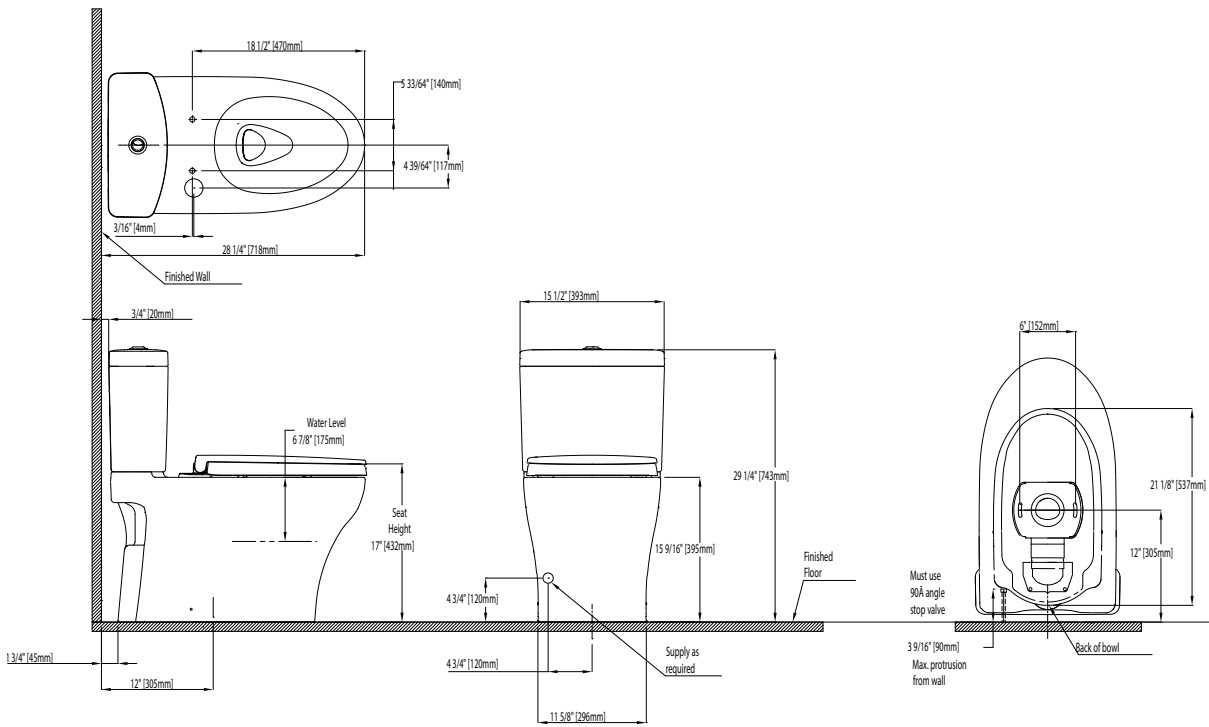

TOTO®

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

SS-01320 v.03