



*There is more than 1 version of this model.  
Page down to identify the version you have.*

## DESCRIPTION

- Metal construction with chrome plated finish
- 2 piece clamshell design for easy installation & maintenance
- Modern style
- Single mount
- Vandal resistant aerator
- Flexible stainless steel supply lines

## OPERATION

- Adjustable sensor activation distance
- Vandal Mode: 30 second time-out feature
- Sentinel Flow: Eliminates stagnant water in supply lines every 24 hours (factory settings – off)
- Maintenance / Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning
- Battery 4(AA) or AC powered
  - For AC connection: AC Transformer 104630 required for up to 8 devices maximum per transformer
- Low battery indicator light
- Battery life: Up to 6 years or 350,000 cycles\*
- Built-in mixing-manual on/off handle (8552/8552AC models)
- In-line filters included

## FLOW



- 0.5 gpm (1.9 L/min) vandal-resistant multi-stream laminar flow

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA compliant

## WARRANTY

- Warranted for 5 years against material or manufacturer defects

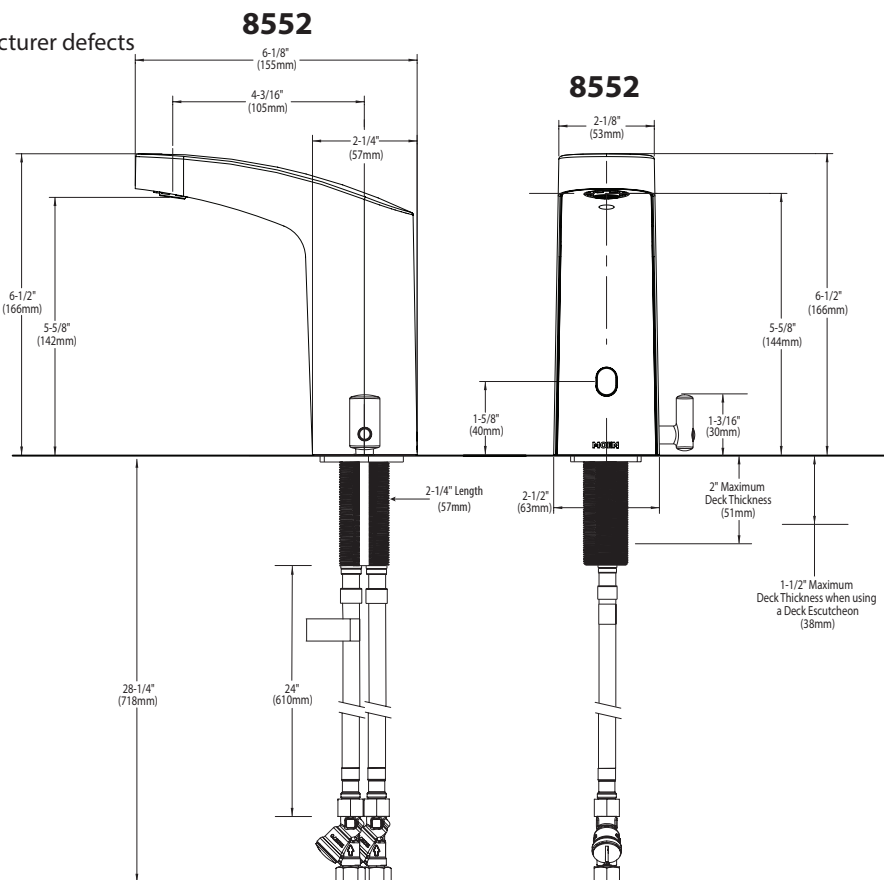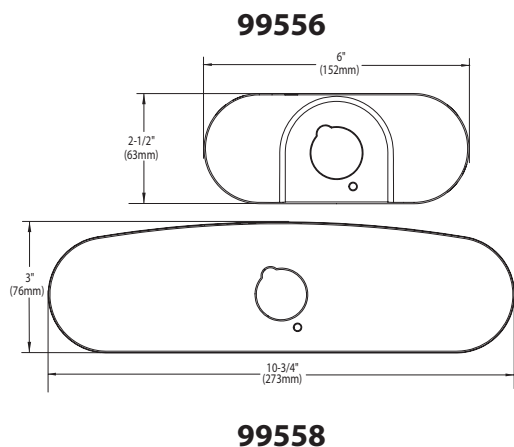


## CRITICAL DIMENSIONS

(DO NOT SCALE)

\* Typical alkaline battery life at 150 uses per day

# Specifications

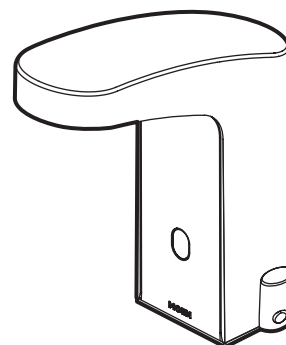

**M•Power™**  
**Electronic Faucet Above-Deck**  
**Modern Style**


**Model:** 8552, 8552AC (mixing)

**NOTE:** DESIGNED TO BE INSTALLED  
THROUGH ONE HOLE 1-1/4" MIN. DIA.  
(see the following page for model 8552AC)



There is more than 1 version of this model.  
Page down to identify the version you have.

# Specifications

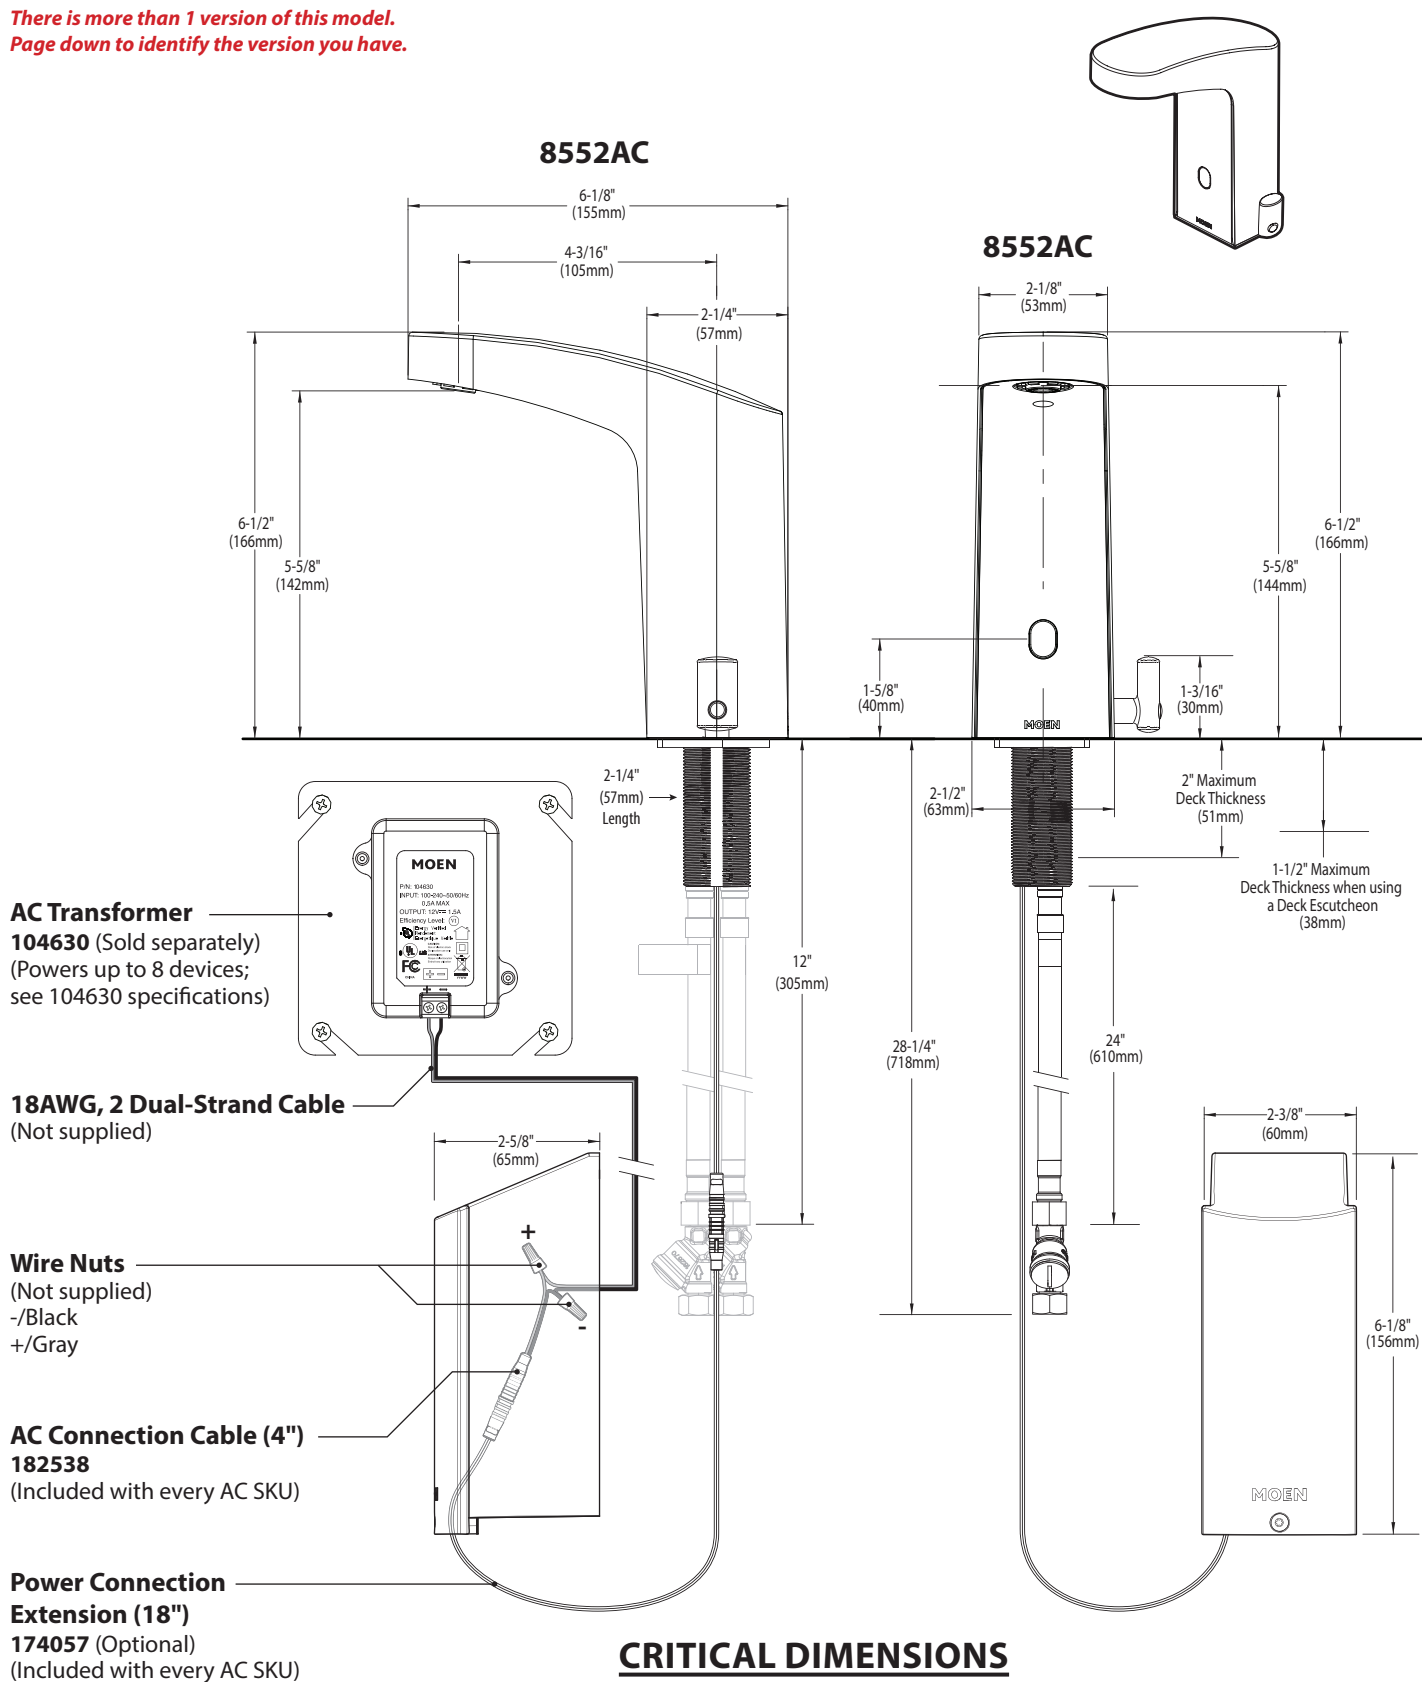

Models prior to November, 2016

## DESCRIPTION

- Metal construction with chrome plated finish
- 2 piece clamshell design for easy installation & maintenance
- Modern style
- Single mount
- Vandal resistant aerator
- Flexible stainless steel supply lines


## OPERATION

- Adjustable sensor activation distance
- Vandal Mode: 30 second time-out feature
- Sentinel Flow: Eliminates stagnant water in supply lines every 24 hours (factory settings – off)
- Maintenance / Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning
- Battery 4(AA) or AC powered
- Low battery indicator light
- Battery life: Up to 6 years or 350,000 cycles\*
- Built-in mixing-manual on/off handle (8552/8552AC models)
- In-line filters included

## FLOW

- 0.5 gpm (1.9 L/min) vandal-resistant multi-stream laminar flow


## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  compliant

## WARRANTY

- Warranted for 5 years against material or manufacturer defects


# Specifications



**M•Power™**  
**Electronic Faucet Above-Deck**  
**Modern Style**

**Model:** 8552, 8552AC (mixing)

**NOTE:** DESIGNED TO BE INSTALLED  
THROUGH ONE HOLE 1-1/4" MIN. DIA.  
(see the following page for model 8552AC)

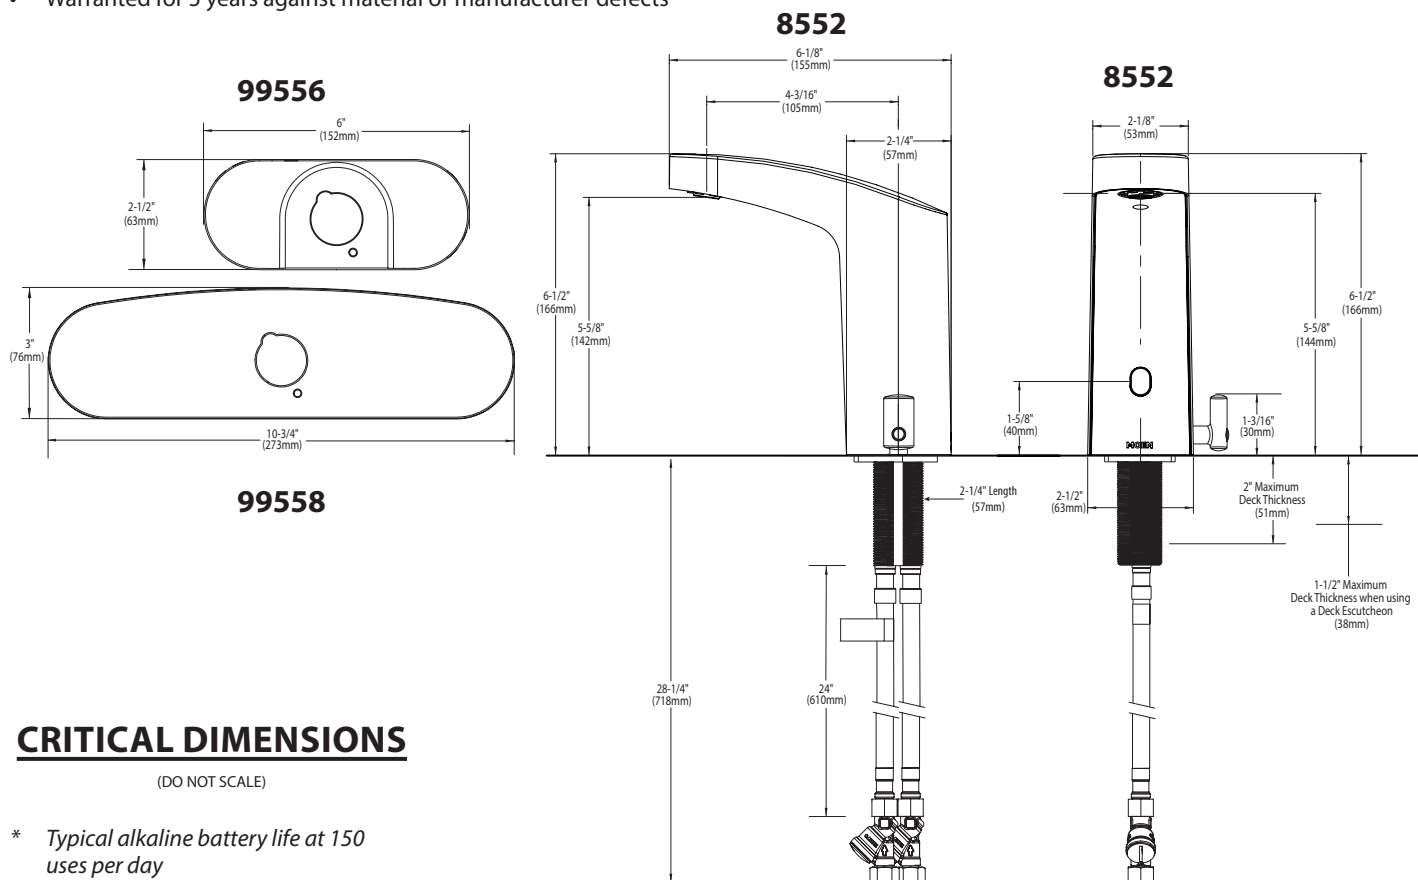

## CRITICAL DIMENSIONS

(DO NOT SCALE)

\* Typical alkaline battery life at 150 uses per day

# Specifications

