

BF1236-XXX-100 PLUS: TCD3 Thermostatic Coaxial Shower System

SPECIFICATIONS



Components included

- BF1383-XXX * : Rainhead and 90° wallarm
- 102860-XXX * : 2-jet handshower
- 101328-XXX * : Wallbar
- 101620-XXX * : 60" flexible and soft PVC hose
- BF1124-XXX * : 1/2" Thermostatic coaxial diverter valve and decorative trim
- 101228-XXX * : Wall outlet
- 101528-XXX * : Tub spout

* XXX means that the finish color must be specified.

Colors (Finishes)

- Chrome : BF1236-110
- Brushed Nickel PVD : BF1236-120

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1



See the following sheets for the technical features of each component.

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

Kalia inc. 1355, 2nd Street Sainte-Marie (Quebec) Canada G6E 1G9 t. **1-418-387-9090 1 877 GO KALIA** (1-877-465-2542) f. 1-418-387-9089 www.KaliaStyle.com



BF1383 PLUS: Rainhead and 90° Wallarm SPECIFICATIONS

Features

- Water 1/2" male inlet NPT
- Dimension: 251 x 251mm (9 7/8" x 9 7/8")
- Anti-scale system with soft sprays
- Adjustable orientation swivel
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : BF1383-110
- Brushed Nickel PVD : BF1383-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Canada G6E 1G9

Packaging

- **Dimensions**: 406mm x 324mm x 133mm (16" x 12 3/4" x 5 1/4")
- Volume: 0.62 cu ft (0.018 cu m)
- Total weight: 2.57 lb (1.165 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

www.KaliaStyle.com

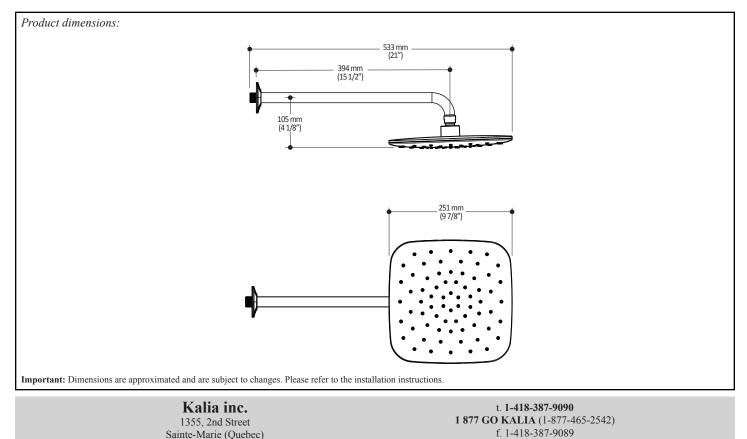



102860 **PLUS: 2-Jet Handshower SPECIFICATIONS**

Features

- Dimension: 121 mm (4 3/4")
- Anti-scale system with soft sprays
- Water G1/2 male inlet
- 2 positions
- PVD finish (Physical Vapour Deposit): A high • technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome: 102860-110
- Brushed Nickel PVD: 102860-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Canada G6E 1G9

Packaging

- Dimensions: 349mm x 171mm x 178mm (13 3/4" x 6 3/4" x 7")
- Volume: 0.376 cu ft (0.01 cu m)
- Total weight: 0.66 lb (0.3 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

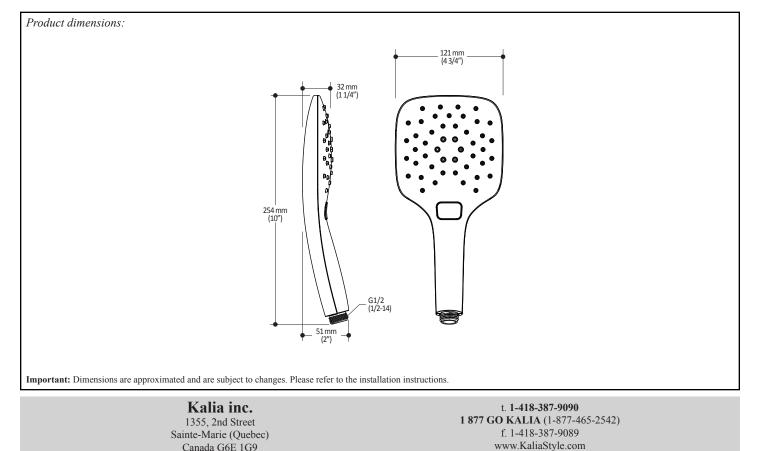



101328 Wallbar for Handshower

SPECIFICATIONS

Features

- Total height of 762mm (30")
- Locking system of 1/4 turn
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 101328-110
- Brushed Nickel PVD : 101328-120

Packaging


- Dimensions: 832mm x 152mm x 89mm (32 3/4" x 6" x 3 1/2")
- Volume: 0.40 cu ft (0.011 cu m)
- Total weight: 1.9 lb (0.86 kg)

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

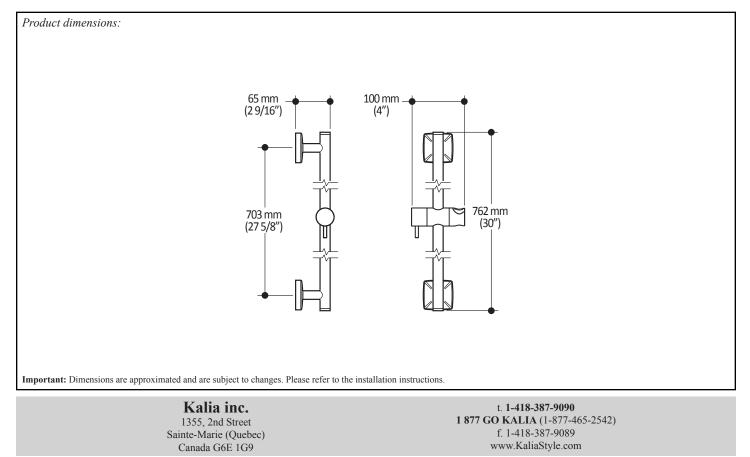



BF1124



1/2" Thermostatic Coaxial Diverter Valve and Decorative Trim

SPECIFICATIONS

Features

- No visible screw
- Water 1/2" male inlet NPT threaded or welded
- Shut-off valves included
- Solid brass construction
- Total adjustment of 19mm (3/4")
- Ceramic cartridge
- Included support for better stability during installation
- Possibility of 3 components (3 direct positions and 2 shared positions)
- 1 small handle used to adjust the temperature
- 1 handle used to select a component
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : BF1124-110
- Brushed Nickel PVD : BF1124-120

Certifications

Packaging

The specified model meets or exceeds the following standards:

ASME A112.18.1 / CSA B125.1



- **Dimensions**: 362mm x 184mm x 191mm (14 1/4" x 7 1/4" x 7 1/2")
- Volume: 0.45 cu ft (0.013 cu m)
- Total weight: 4.96 lb (2.25 kg)

Maximum flow rate

• 40 liters/min. (10.56 gallons/min.) at 60 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included** with the Kalia products for details.

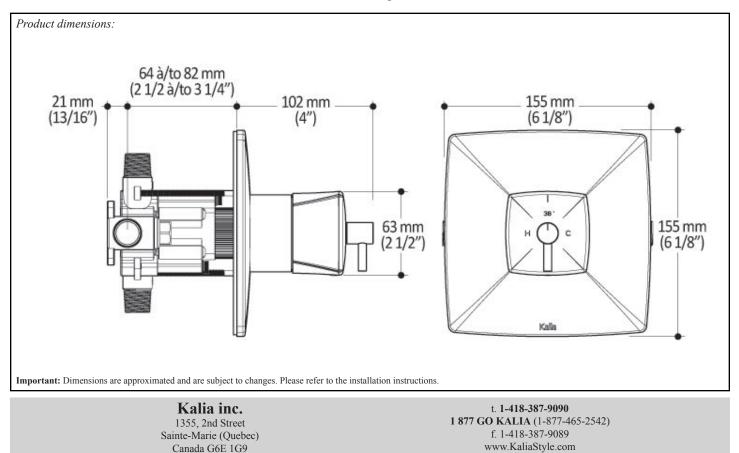



101228 Wall Outlet **SPECIFICATIONS**

Features

- Water 1/2" female inlet NPT
- Water G1/2 male oulet
- Solid brass construction
- Check valve included
- PVD finish (Physical Vapour Deposit): A high • technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome: 101228-110 •
- Brushed Nickel PVD: 101228-120

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1



Canada G6E 1G9

Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- **Total weight**: 0.88 lb (0.40 kg)




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

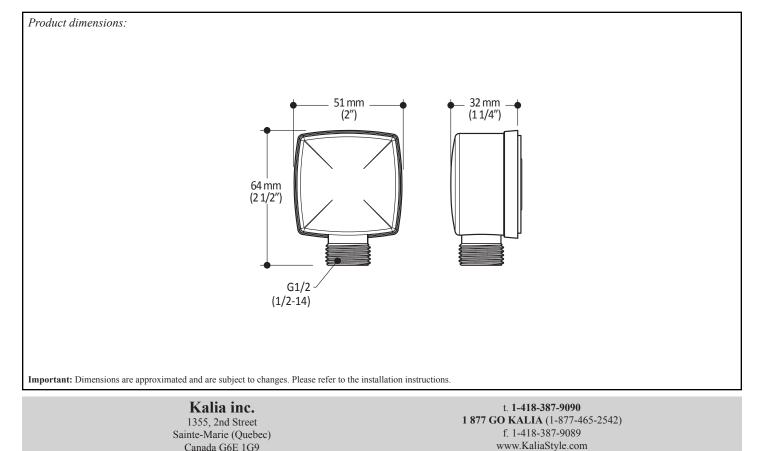



UMANITM 101528 Tub Spout SPECIFICATIONS

Features

- Solid brass construction
- Hidden water jet
- High water flow
- Water 1/2" female inlet NPT
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 101528-110
- Brushed Nickel PVD : 101528-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- Total weight: 1.10 lb (0.50 kg)



Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included** with the Kalia products for details.

