
Contemporary Cold Tap Single Control Bar Faucet Model D35401.700


Traditional Cold TapSingle Control Bar Faucet Model D35402.700

Thank you for selecting DXV by American Standard. To ensure that your installation proceeds smoothly, please read these instructions carefully before you begin.

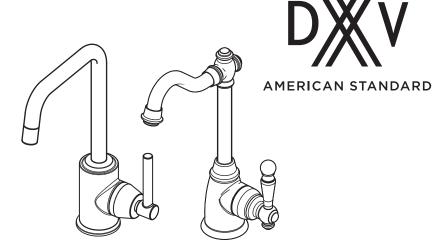

RECOMMENDED TOOLS AND MATERIALS

Most of the procedures require the use of common tools and materials, which are available from hardware and plumbing, supply stores. It is essential that the tools and materials be on hand before work is begun.










Channel Locks

Adjustable Wrench

Plumbers' Putty or Caulking

Regular Screwdriver

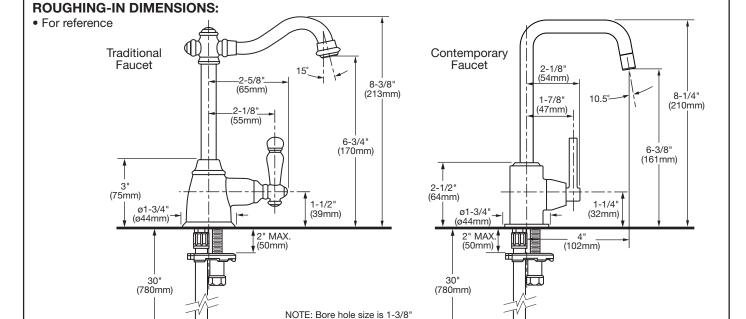

In the United States:

DXV by American Standard One Centennial Avenue Piscataway, New Jersey 08855 Attention: Director of Customer Care

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 227-2734 www.DXV.com

In Canada:

3/8" COMPRESSION

DXV by American Standard 5900 Avebury Road Mississauga, Ontario L5R 3M3 Canada

Toll Free: 1-800-387-0369 Local: 905-306-1093 Fax: 1-800-395-1498 www.DXV.ca

In Mexico:

DXV by American Standard Via Morelos 330 Col. Santa Clara Coatitla Ecatepec, Estado de México 55540

3/8" COMPRESSION


Toll Free: 01-800-8391200 www.DXV.mx SAVE FOR FUTURE USE

INSTALL FITTING CAUTION Turn off hot and cold water supplies before beginning.

NOTE: Traditional installation shown.

Contemporary faucet is installed in the same manner.

- Install SEAL (1) in groove at bottom of faucet.
- Feed FLEXIBLE FAUCET SUPPLY (2) and SHANK (3) through the mounting hole of lavatory, or mounting surface.
- From below, Install "C" WASHER (4), and LOCKNUT (5) onto faucet SHANK (3). Before final tightening, adjust faucet so that it is centered and covers mounting hole. Tighten LOCKNUT (5) using a screwdriver or hex wrench.

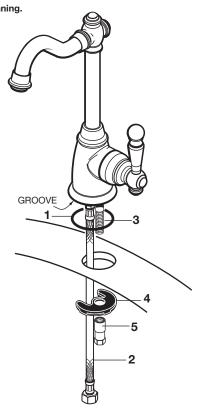

MAKE WATER SUPPLY CONNECTION

- Turn off cold water supply before beginning.
- Connect FLEXIBLE SUPPLY (1) directly to wall supply. Connection on fitting supply is 3/8" (10mm) compression. Use adjustable wrench to tighten connection. Do not over tighten. Faucet supply is 30" (762mm) long from faucet base. Figure A.

Note: If additional supply length is required, installer must purchase additional parts separately.

Important: If FLEXIBLE SUPPLY (1) is too long, loop as illustrated to avoid kinking.


TEST INSTALLED FAUCET


- Move HANDLE (2) into "off" position. Figure B.
- With HANDLE (2) in OFF position, turn on WATER SUPPLY (3) and check all connections for leaks.
- Operate HANDLE (1) to flush water lines thoroughly.

TROUBLE SHOOTING

Low water flow from faucet:

• Remove AERATOR (4) and clean if necessary.

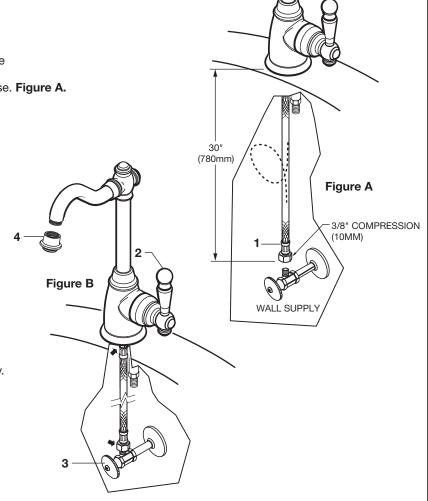

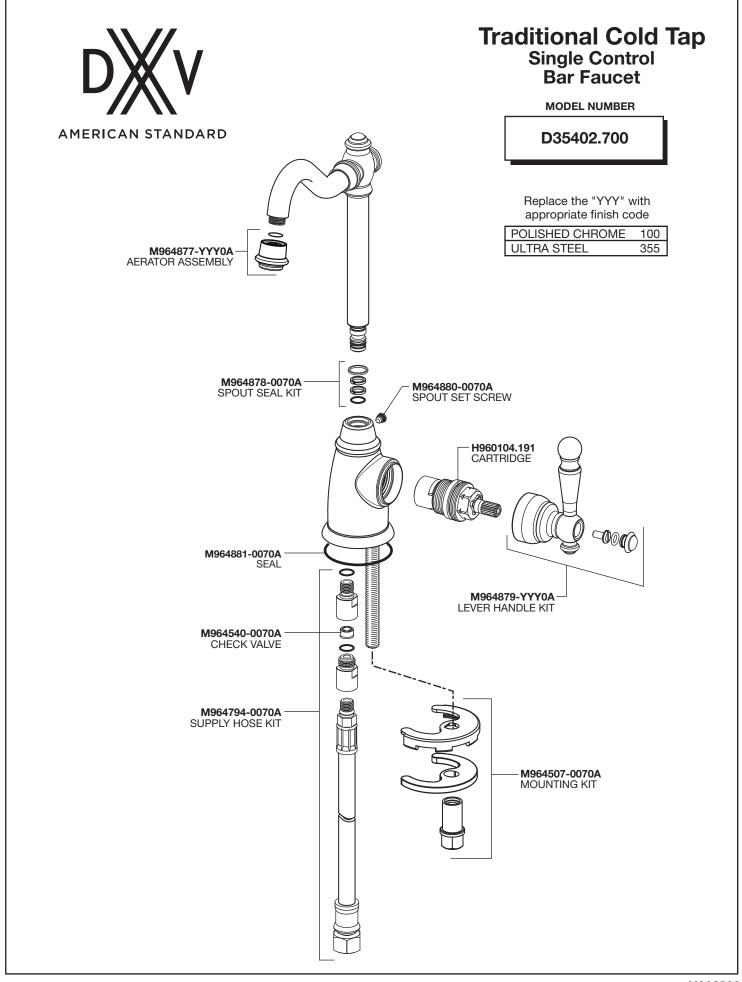

Contemporary Cold Tap Single Control Bar Faucet **MODEL NUMBER** AMERICAN STANDARD D35401.700 Replace the "YYY" with appropriate finish code POLISHED CHROME 100 ULTRA STEEL 355 M964882-YYY0A AERATOR ASSEMBLY M964884-0070A SPOUT SET SCREW KIT **M964878-0070A** SPOUT SEAL KIT **H960104.191** CARTRIDGE M964883-YYY0A LEVER HANDLE KIT M964885-YYY0A ESCUTCHEON KIT **M964540-0070A**CHECK VALVE M964794-0070A SUPPLY HOSE KIT **M964507-0070A**MOUNTING KIT