
Submitted Model No.:_______Specific Features:



♦ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

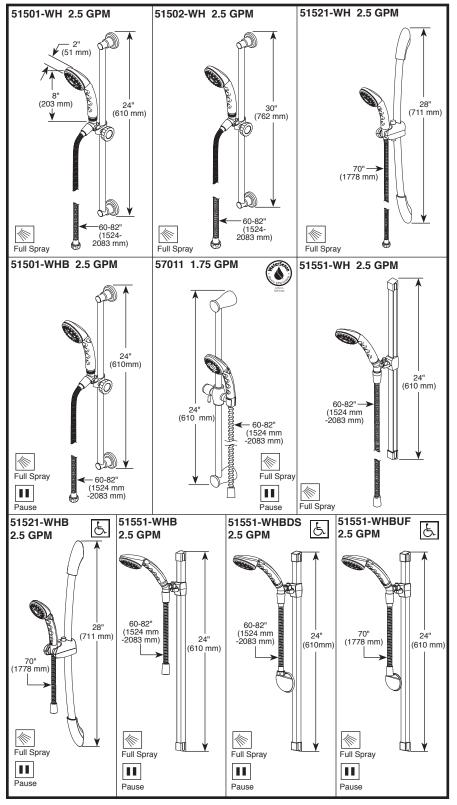

see what Delta can do

WALL BAR HAND HELD SHOWERS

- Certified Dual Check Valves
- Decorative Wall Bar

STANDARD SPECIFICATIONS:

- 70" ultra-flex hose: 51521-WH, 51521-WHB, & 51551-WHBUF
- 60-82" stretchable metal hose: 51501-WH & 51502-WH, 51501-WHB, 57011, 51551-WH, 51551-WHB, & 51551-WHBDS
- ADA compliance applies to the hand shower and hose only: 51551-WHBDS, 51551-WHBUF & 51521-WHB
- Certified dual check valves for backflow protection.
- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (57011 only)
- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa
- Handheld shower with two spray settings pause is a non-positive shut-off (51501-WHB, 57011, 51521-WHB, 51551-WHB, 51551-WHBDS, 51551-WHBUF).

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Indicates compliance to ICC/ANSI A117.1

