


# BRIZO®


## LAVATORY FAUCETS

- Siderna® Bath Collection
- Two Handle Wall-Mounted Lavatory Valve
- Three Hole Applications

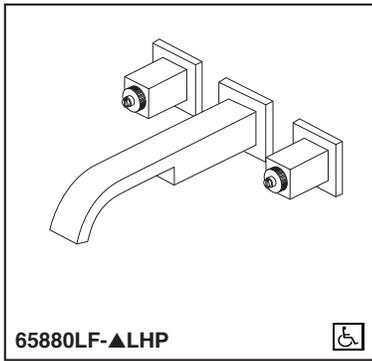

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

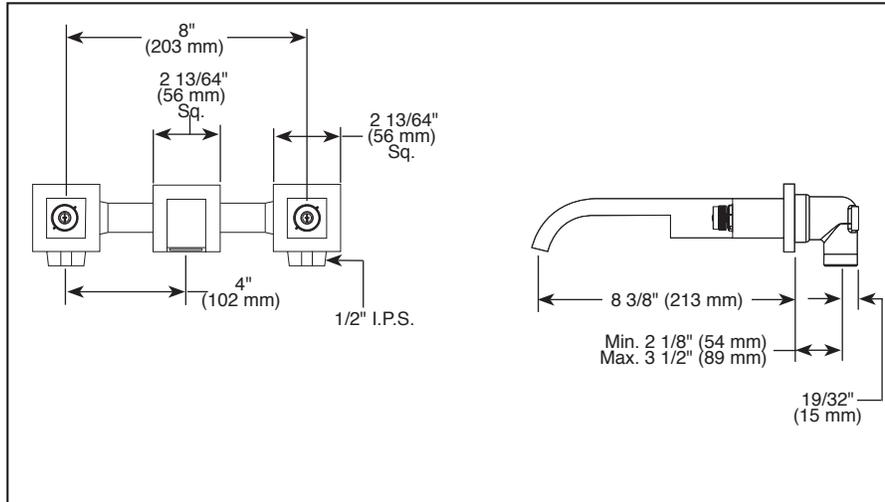

HL5880▲ (Metal Inserts)	HL5881▲ (Green Glass Inserts)	HL5882▲ (Solar Gray Glass Inserts)

▲ Designate Proper Finish Suffix

### STANDARD SPECIFICATIONS:

- Two handle lavatory faucet for concealed mounting in 3 hole wall applications.
- Solid metal spout - 8 3/8" (213 mm) long.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- 8" centers, 4" distance between holes.
- Recommend 1 1/2" hole size.
- Adjustable roughing in dimensions: 2 1/8" to 3 1/2".
- 1/2" I.P.S. inlets.
- Drain sold separately.
- Max. 1.5 gpm @ 60 PSI, 5.7 L/min @ 414 kPa
- Handles attach to valve by use of magnets inside handles. No set screw required.
- Handles sold separately.

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.