


Thermostatic shower mixer for concealed installation # C142000140..

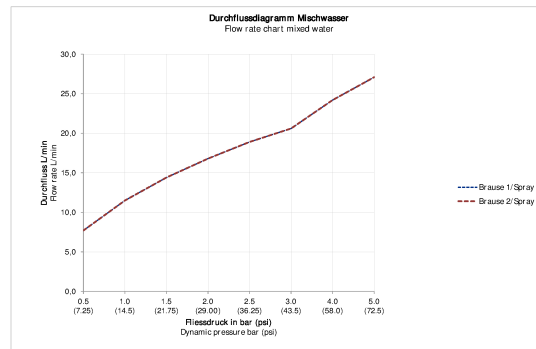

Thermostatic shower mixer for concealed installation	Dimension	Weight	Order number
connection type: basic set for concealed installation, thermostatic cartridge, round escutcheon Ø 170 mm, flow rate 20,6 l/min (3 bar), safety lock at 38°C, includes: visible parts with functional unit, recommended operating pressure 3 - 5 bar, 2 outlets, with shut-off and diverter valve			
Colors			
10 Chrome 46 Black Matt			
Variant			
surface chrome			C142000140..
Necessary accessory			
Bluebox® 1/2" BLUEBOX® is a registered trademark of Oras Oy, Basic set for concealed installation, Installation depth 75 mm - 105 mm, without shut-off valves, connection size DN15			GK0900000
Bluebox® 3/4" BLUEBOX® is a registered trademark of Oras Oy, Basic set for concealed installation, Installation depth 75 mm - 105 mm, with shut-off valves			GK0900001

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.

Thermostatic shower mixer for concealed installation #
C142000140..

