




Specifications



GR22-Series 2" Discharge Guide Rail System

GR22-Series Dimensional Data

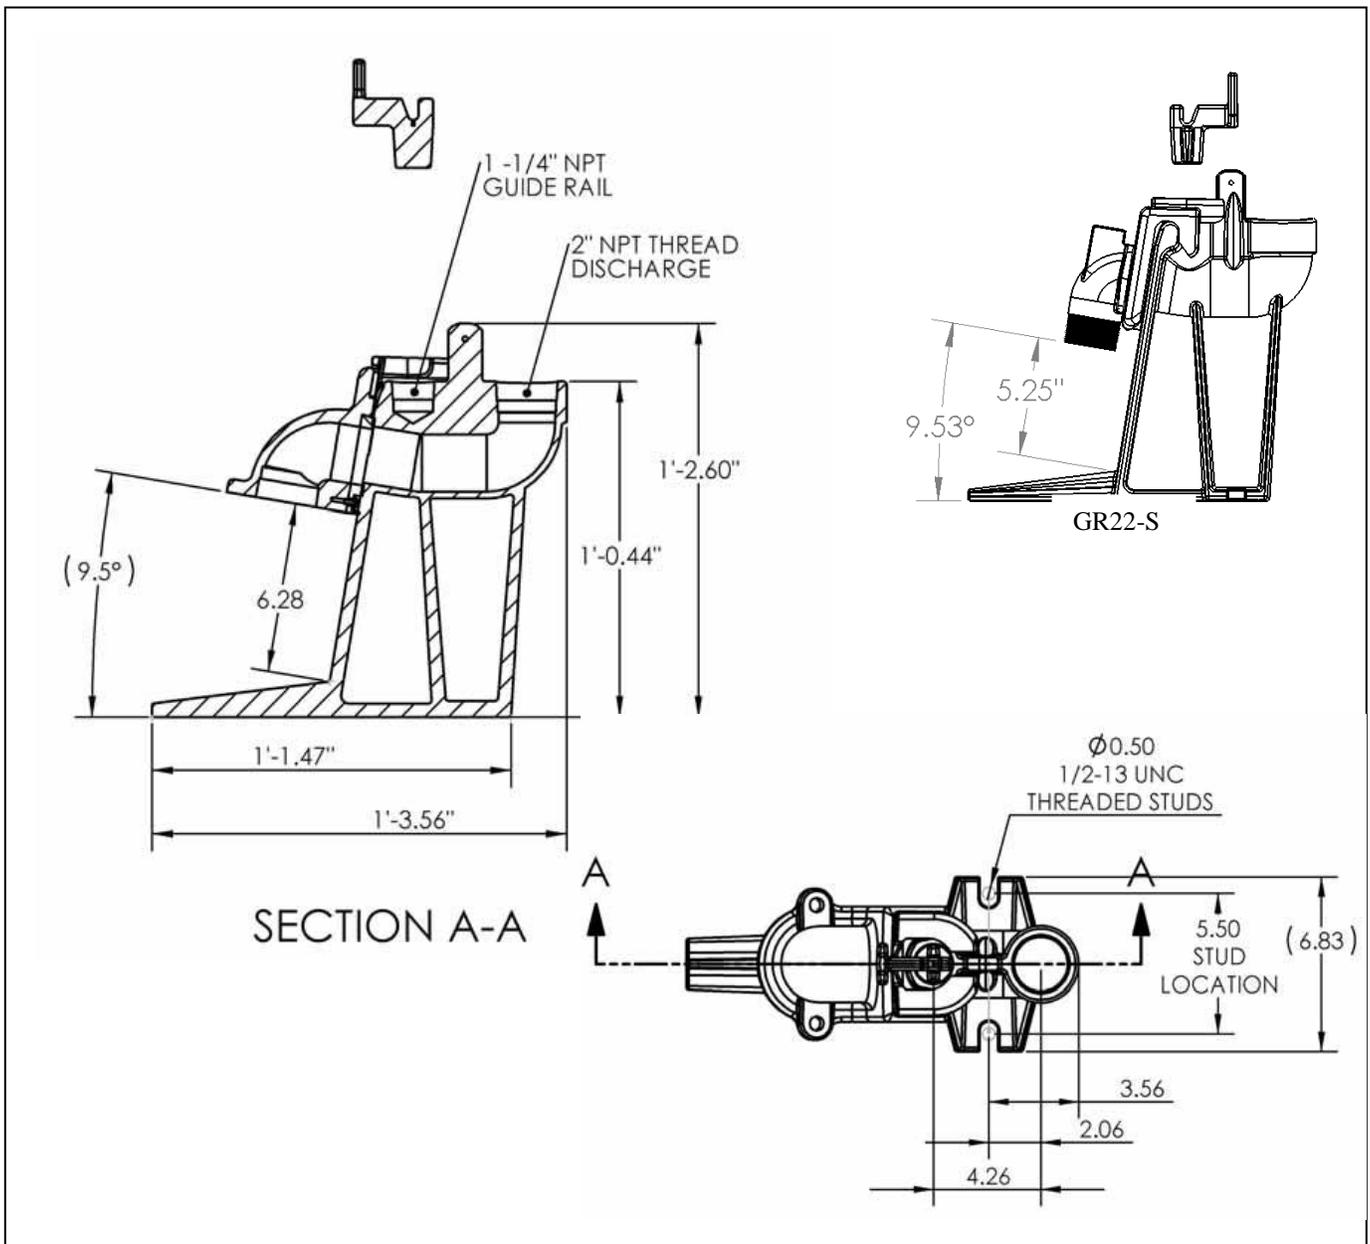


GR22-Series Technical Data

GUIDE RAIL BASE / DISCONNECT	CLASS 25 GRAY CAST IRON
GUIDE RAIL	ACCEPTS STANDARD 1¼" NPT PIPE (PIPE NOT INCLUDED)
DISCHARGE PIPE	ACCEPTS STANDARD 2" NPT PIPE (PIPE NOT INCLUDED)
PAINT	POWDERCOATING
HARDWARE	STAINLESS STEEL
SEALING GROMMET	BUNA N
PUMP INTERFACE	GR22-FL: FITS FL100, FL150, AND FL200-SERIES PUMPS, PLUS 2" FEMALE THREADS ALLOW USE WITH OTHER PUMPS
	GR22-LE: FITS LE70, LE100, LEH100, LEH150, AND LEH200-SERIES PUMPS, PLUS 2" FEMALE THREADS ALLOW USE WITH OTHER PUMPS
	GR22-S: FITS LE40 AND LE50; THE DETACHABLE THREADED NIPPLE ALLOWS THIS RAIL TO BE USED WITH ALMOST ANY PUMP WITH A 2" NPT THREADED DISCHARGE.
MAXIMUM PUMP WEIGHT	250LBS

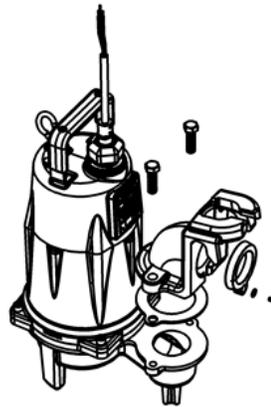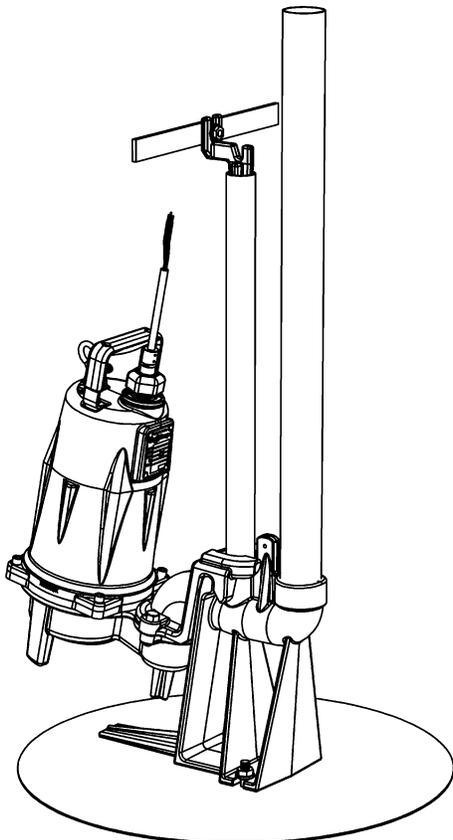

The GR22-LE and GR22-FL have a flanged claw that mounts directly to pump, They also have a 2" NPT threaded port for optional nipple connection.



The GR22-S has a 2" NPT detachable threaded nipple.