

## **Highline® Classic**

Two-piece elongated toilet, 1.0 gpf K-3519-T

### **Features**

- Elongated bowl offers added room and comfort
- Equipped with Sloan FLUSHMATE® Sloan® Valve Company
- Polished Chrome trip lever
- Tank cover locks included
- 1.0 gpf (3.8 lpf)
- 2-1/4" (57 mm) fully glazed trapway
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults

### Installation

- Seat and supply line sold separately
- Standard 12" (305 mm) rough-in

### **Recommended Products/Accessories**

K-5588 Purefresh® Deodorizing elongated toilet seat K-4108 C³®-230 Elongated bidet toilet seat with remote control

K-5420 Low-Profile Bolt Caps

### **Included Components**

K-4304 Elongated toilet bowl K-4484-T Toilet tank, 1.0 gpf





### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

# KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
4.05	7	Black Black™





## **Highline® Classic**

Two-piece elongated toilet, 1.0 gpf K-3519-T

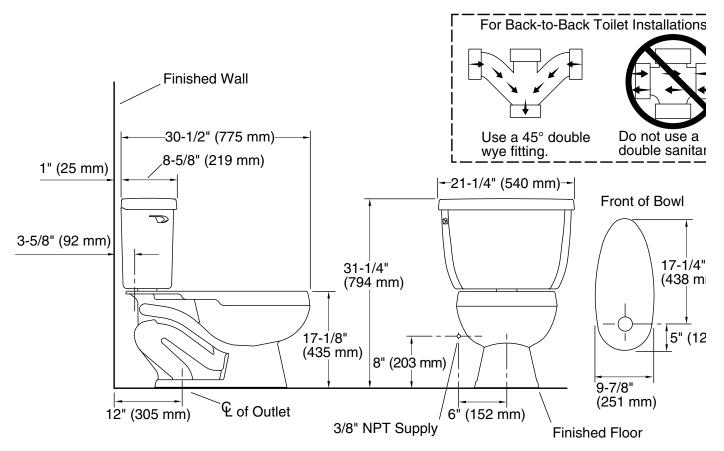

### **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Pressure Lite
Trap passageway: 2-3/16" (55 mm)

Water surface size: 11-1/2" x 9-1/2" (292 mm x 241 mm)

Rim to water 5-3/4" (146 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

### **Fixture Supply Requirements**

Min static pressure: 35 psi (241.3 kPa) Max static pressure: 80 psi (551.6 kPa)

### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

