

# Location:



9604-PLR, 9604-PLR-TRM, 9604PLRTRMTC  
Tub/Hand Shower Trim  
**Specification Submittal**



## Feature Highlights

- Origins Tub/Hand Shower System or Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with 9604-PLR)
- Adjustable stop screw to limit handle turn (included with 9604-PLR)
- Metal lever handle
- ADA 36" grab bar for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- ADA 1 mode hand shower wand with non-positive shutoff
- 2.0 gpm (7.6 L/min) flow restrictor
- 5-1/2" diverter tub spout
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9604PLRTRMTC)
- For optional in-line vacuum breaker order p/n EF-109

## Model Numbers

- 9604-PLR**  
Tub/Hand Shower Trim with  
Temptrol Pressure Balancing Tub/Shower Valve
- 9604-PLR-TRM**  
Tub/Hand Shower Trim, Temptrol Pressure Balancing Tub/  
Shower Valve ordered separately
- 9604-PLR-TRMTC**  
Tub/Hand Shower Trim with TA-10 flow control spindle and  
T-12A cap assembly, must order Temptrol valve with Test  
Cap

## Options/Modifications

- 1.5** 1.5 gpm (5.7 L/min) flow restrictor
- 1.75** 1.75 gpm (6.6 L/min) flow restrictor
- 72** 72" hose in place of 60" hose
- L2** Less hand shower (wand only)
- L5** Less hend shower system (less bar, hose, wand and elbow)
- L6** Less tub spout
- L7** Less handle
- VP** Vandal resistant escutcheon screws in place of standard screws
- STN** Satin Nickel finish
- B** Brass escutcheon (chrome only)
- X** Integral service stops - allows water shut-off at valve for service

**Note:** Append appropriate suffix to model number.

## Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)
- Buy American Act (9604-PLR only)



## Warranty


**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



## Architectural/ Engineering Specification

Symmons Origins \_\_\_\_\_ With Origins Tub/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with 9604-PLR), Adjustable stop screw to limit handle turn (included with 9604-PLR), Metal lever handle, ADA 36" grab bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower wand with non-positive shutoff, 2.0 gpm (7.6 L/min) flow restrictor, 5-1/2" diverter tub spout, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9604PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow restrictor", "72 - 72" hose in place of 60" hose", "L2 - Less hand shower (wand only)", "L5 - Less hend shower system (less bar, hose, wand and elbow)", "L7 - Less tub spout", "Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish". "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".

## Dimensions

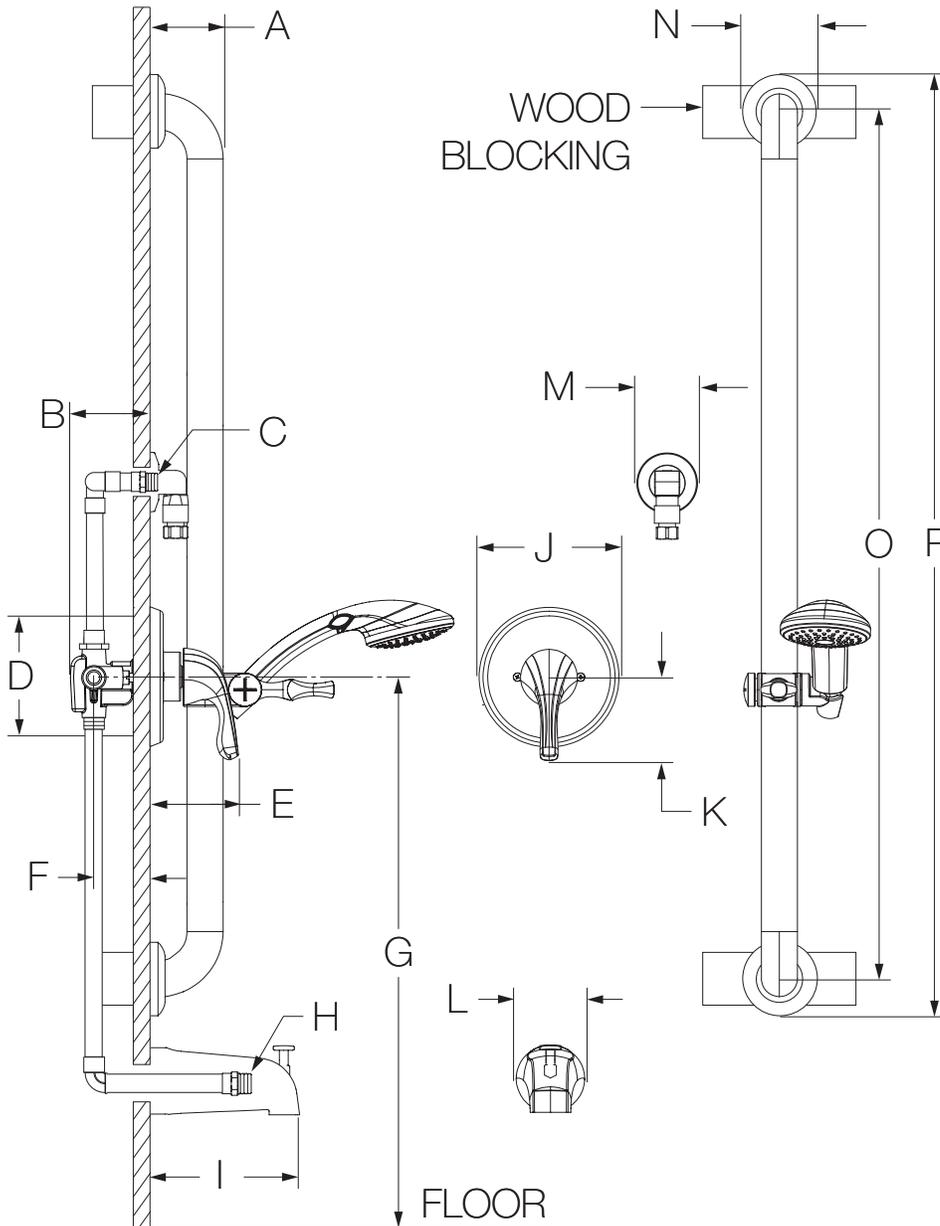

Measurements	
<b>A</b>	3", 76 mm
<b>B</b>	3-1/2", 89 mm
<b>C</b>	Male 1/2" NPT fitting must protrude 3/8" from finished wall
<b>D</b>	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
<b>E</b>	3-5/8", 92 mm
<b>F</b>	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
<b>G</b>	Ref. 32", 813 mm
<b>H</b>	Male 1/2" NPT thread must protrude 4" from finished wall
<b>I</b>	5-1/4", 133 mm
<b>J</b>	Ø 5-3/4", 146 mm
<b>K</b>	3-3/8", 86 mm
<b>L</b>	Ø 2-1/2", 64 mm
<b>M</b>	Ø 2-1/2", 64 mm
<b>N</b>	Ø 3-1/8", 79 mm
<b>O</b>	36", 914 mm
<b>P</b>	39", 991 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.