NEOREST

MS982CUMG

Neorest 550H Elongated Toilet/Bidet

FEATURES

- Tornado Flush[™] siphon jet flushing system,ultrahigh efficiency (1.0GPF/3.8LPF and 0.8GPF/3.0LPF).
- CeFiONtect[™] ceramic glaze minimizes debris, mold and bacteria from sticking to porous, ceramic surfaces
- Auto lid open/close, auto flush
- eWater+
- Multifunction remote control
- Adjustable heated seat
- Adjustable spray position
- Washlet with three wash modes (front, rear, soft)
- Oscillating and pulsing comfort washing
- Energy saver timer
- Built-in air purifying system

COMPONENTS

- SN982MR Top Unit
- CT982CUMG Elongated bowl
- THU9660 (sold separately)

Note: SN982MR Only compatible with CT982CUMG

COLORS/FINISHES

#01 Cotton#12 Sedona Beige

PRODUCT SPECIFICATION

The Neorest 550H with the Tornado Flush system toilet shall be 1.0GPF/3.8LPF and 0.8 GPF/3.0 LPF. Toilet shall have CeFiONtect ceramic glaze.

Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be

TOTO Model MS982CUMG_____.



ewater+



CeFiONtect



Tornado Flush

CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, and others





Neorest 550H Elongated Toilet/Bidet

SPECIFICATIONS

Water Use: 1.0 GPF/3.8 LPF

& 0.8 GPF/3.0 LPF

Flush System: Tornado Flush Siphon Jet Water Pressure: Min 7 PSI (0.05MPa) Flowing

Max 80PSI (0.55MPa) static

Water Surface: 8-3/4" x 7-1/14"
Trap Diameter: 2-1/8" (54 mm)
Rough In: 12" rough in

Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the

base board.

Trap Seal: 2-1/8" (56 mm)

Warranty: Three Year Limited (Residential)

One Year Limited (Commercial)

Material: Bowl: Vitreous china

Seat and cover: Plastic

Shipping Weight: Top Unit - SN982MR 20lbs


Bowl Unit - CT982CUMG 82lbs


Shipping Dimensions: SN982MR -

17-3/4" × 30-5/8" × 11-1/2"


CT982CUMG -

16-3/4" x 29-1/2" x 21-1/2"

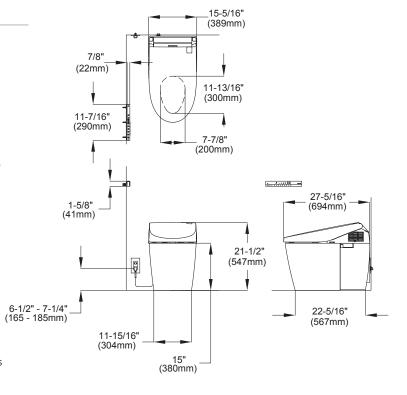



Extended water supply range locations using the Connection Unit THU9660 (sold separately)



Power Rating 120V AC, 60 Hz.836W

Power Cord Maximum length: 4 ft (1.2 m)
Water Feature Adjustable Water Flow Rate

Rear washing: from 9.1 to 14.5 oz/min. Soft washing: from 10.8 to 14.5 oz/min. Front washing: from 9.8 to 14.5 oz/min. Wide front washing: from 11.8 to 14.5 oz/min.

Temperature of Washing Spray Minimum: 86° F/30° C Maximum: 104° F/40° C

Safety Features: Temperature fuse, Bi-metal sensor (auto reset), and

Float switch
Drying Feature Air Temperature:

High: About 140°F/60°C Low: About 95°F/35°C

Capacity of Air: 10.2 ft³/min Safety Feature: Temperature Fuse Seat Warming Feature

Surface Temperature: Minimum: 82° F/28° C Maximum: 97° F/36° C

Seat Heater Capacity: 50W

 $\begin{array}{ccc} & \text{Safety Feature: Thermal fuse} \\ \text{Air Purifying Feature} & \text{Method: O}_2 \text{ Deodorizer} \\ \text{Air Volume: 5.7 ft}^3/\text{min} \end{array}$

Ambient Temperature Range 33° F/1 $^{\circ}$ C to 104° F/40 $^{\circ}$ C Size $15.3'' \times 27.75'' \times 21.5''$

Weight Net: 85.5 lbs.

