



Features

Meets requirements for efficiency rebates

Glowing ceramic ember base and logset



ILLUME
TRADITIONAL

SPECIFICATIONS
AND FEATURES

ILLUME INSERTS
TRADITIONAL

30FID
34FID

Coaxial
Insert

QUICK DIMENSIONS

	30FID		34FID	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	29½	N/A	33½	N/A
B.WIDTH	19¾	N/A	23¾	N/A
HEIGHT	20	N/A	23¾	N/A
DEPTH	13½	N/A	14½	N/A
VIEWING	24¼ x 14½		28¾ x 18¾	

Standard

Ceramic burner and logset

Full feature Proflame 2 remote control

Halogen downlighting

Battery backup for continuous operation

Invisimesh screen

Options

Propane conversion kit

Remote controlled fans

Black porcelain liner

Various traditional liners†

Square, oversized or 4 sided surround†

†Required to complete install



BTU LISTING

30FIDNIS-01 / 24,000
30FIDLIS-01 / 23,000


34FIDNIS-01 / 31,000
34FIDLIS-01 / 30,000

EFFICIENCY

30FIDNIS-01 / 78.8% P4
30FIDLIS-01 / 80.1% P4

34FIDNIS-01 / 81.1% P4
34FIDLIS-01 / 82% P4

ILLUME DIMENSIONS

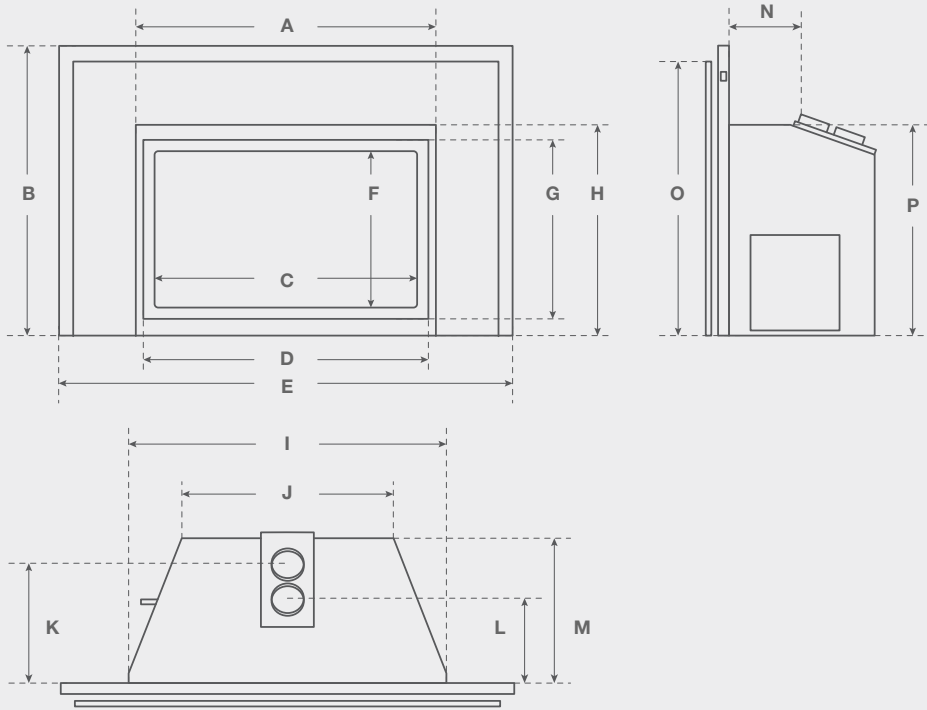

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
30FID	27 $\frac{3}{4}$	26 $\frac{5}{8}$	24 $\frac{1}{4}$	26 $\frac{1}{4}$	42	14 $\frac{1}{4}$	16 $\frac{5}{8}$	19 $\frac{1}{2}$	29 $\frac{1}{2}$	19 $\frac{5}{8}$	11 $\frac{1}{4}$	8	13 $\frac{1}{2}$	6 $\frac{3}{4}$	25 $\frac{3}{8}$	20
34FID	31 $\frac{3}{4}$	31	28	38 $\frac{3}{8}$	46 $\frac{1}{2}$	17 $\frac{1}{2}$	20 $\frac{1}{8}$	23 $\frac{3}{8}$	33 $\frac{1}{2}$	23 $\frac{3}{8}$	12 $\frac{3}{8}$	8 $\frac{5}{8}$	15	6 $\frac{3}{4}$	29 $\frac{1}{2}$	23 $\frac{3}{4}$



MONTIGO / ILLUME / 34FID / TRADITIONAL



MONTIGO / ILLUME / 30FID / TRADITIONAL




REMOTE^A
RXM5010




WALL REMOTE
REC1493



BLACK PORCELAIN[†]
PPL**



RUSTIC BROWN[†]
BRK3*FIB



RUSTIC RED[†]
BRK3*FIR

^A Standard on all inserts
[†] Must order a liner to complete order

Unit Specifications

Icon Legend

AVAILABLE +

NOT AVAILABLE -

DEDICATED ◊

STANDARD ○

	BTU	Gas Supply Press. NG (shown in w.c.)	Venting	Front viewing area	Front glass type	Standard media	Powervent	Remote control	Fans	Uplighting	Downlighting
30FIDN-L-F [NG]	24,000	7	3"OUT 3"IN	24¼x 14¼	Neoceramic	None	-	○	+	○	-
30FIDL-L-F [Propane]	23,000	11	3"OUT 3"IN	24¼x 14¼	Neoceramic	None	-	○	+	○	-
30FIDN-S-F [NG]	24,000	7	3"OUT 3"IN	24¼x 14¼	Neoceramic	Traditional	-	○	+	-	○
30FIDL-S-F [Propane]	23,000	11	3"OUT 3"IN	24¼x 14¼	Neoceramic	Traditional	-	○	+	-	○
34FIDN-L-F [NG]	31,000	7	4"OUT 3"IN	28¾x 18½	Neoceramic	None	-	○	+	○	-
34FIDL-L-F [Propane]	30,000	11	4"OUT 3"IN	28¾x 18½	Neoceramic	None	-	○	+	○	-
34FIDN-S-F [NG]	31,000	7	4"OUT 3"IN	28¾x 18½	Neoceramic	Traditional	-	○	+	-	○
34FIDL-S-F [Propane]	30,000	11	4"OUT 3"IN	28¾x 18½	Neoceramic	Traditional	-	○	+	-	○

ILLUME MASONRY CAVITY

	A	B	C	D	E
30FID	20	14	30	20	5
34FID	24	15	34	24	6

