

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Pullout spray with 59" braided hose and Duralock™ Quick Connect installation
- Flexible supply lines with 3/8" compression fittings

OPERATION

- Spout rotates 110°
- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in spray or stream mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS


- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- **ADA**  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

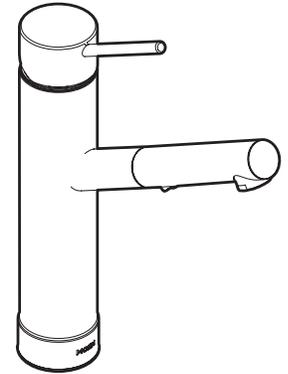

TILT™
Single Handle Pullout
Kitchen Faucet

Model: 7626 series

NOTE: THIS FAUCET IS DESIGNED TO BE
INSTALLED THROUGH 1 HOLE,
1-1/2" (38mm) MIN. DIA.

