





TWO HANDLE TUB & SHOWER

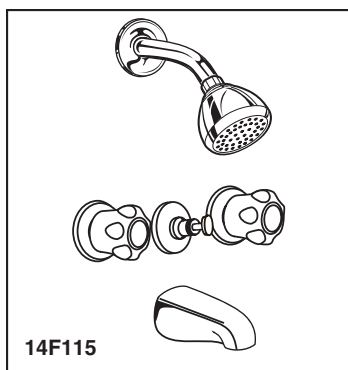

SUBMITTED MODEL NO.: _____

SPECIFIC FEATURES: _____

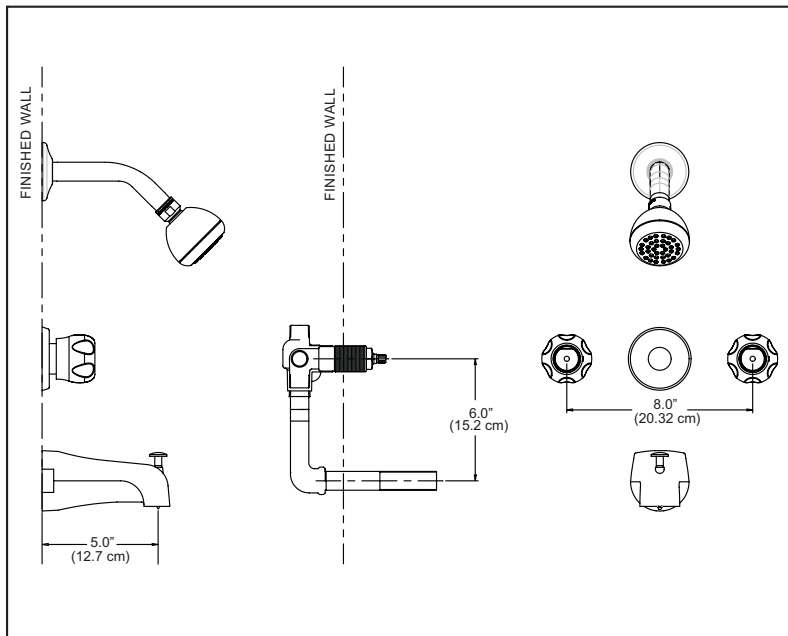

SUGGESTED SPECIFICATIONS:

- Tub and shower trim.
- Chrome-plated fluted handles.
- Colour coded index buttons.
- Chrome-plated brass shower arm and flange.
- Tub spout with brass drop nipple and elbow.
- Touch Clean® shower head.


SHOWER HEAD

- Maximum - 2.0 gpm @ 80 psi (7.6 L/min @ 552 kPa)
- Minimum - 1.8 gpm @ 45 psi (6.8 L/min @ 310 kPa)



BRASS STEM – COMPRESSION

1	Acme threads engaged at all times for long life. Lubrication lasts and water is sealed out
2	Replaceable radial seal “O” ring
3	Replaceable seat washer
4	Stainless steel screw
5	Nickel chrome-plated renewable brass seats




COMPLIES WITH:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense®
- Intended for replacement only and not for new construction or permitted work.

Waltec
Masco Canada Limited
350 South Edgeware Road
St. Thomas, ON N5P 4L1


www.waltecfaucets.ca
© 2018 Masco Canada Limited

Waltec reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

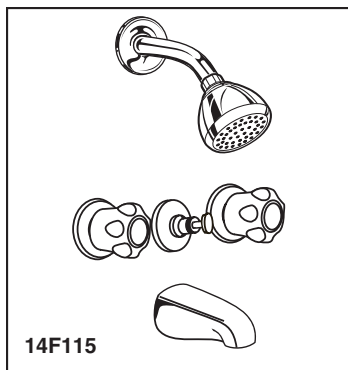


NUMÉRO DU MODÈLE SOUMIS : _____

CARACTÉRISTIQUES SPÉCIFIQUES : _____

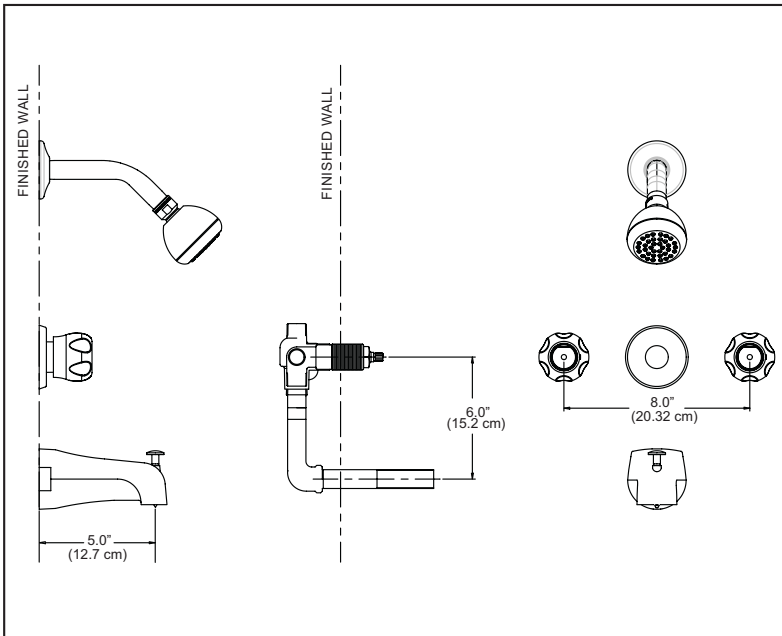

TIGE DE LAITON – COMPRESSION	
1	Filetages Acme engagés en tout temps pour une longue durée de vie. La lubrification perdure et l'étanchéité demeure
2	Joint torique d'étanchéité radiale remplaçable
3	Rondelle de siège remplaçable
4	Vis d'acier inoxydable
5	Sièges de laiton et nickel plaqué chrome renouvelables



ENSEMBLES POUR BAIGNOIRE ET DOUCHE, À DEUX MANETTES

SPÉCIFICATIONS SUGGÉRÉES :

- Garniture pour baignoire et douche.
- Manettes cannelées chrome-plaquées.
- Capuchons de manette à codes de couleur.
- Bras et bride de douche en laiton chrome-plaqués.
- Bec de bain avec le mamelon et le coude en laiton.
- Pomme de douche Touch Clean^{MD}.

POMME DE DOUCHE

- Maximum - 2,0 gpm @ 80 psi (7,6 L/min @ 552 kPa)
- Minimum - 1,8 gpm @ 45 psi (6,8 L/min @ 310 kPa)



CONFORMES AUX NORMES SUIVANTES :

- ASME A112.18.1/CSA B125.1
- EPA WaterSense®
- Destiné au remplacement uniquement et non aux nouvelles constructions ou aux travaux autorisés.