


Submitted Model No.:\_\_\_\_\_\_\_\_Specific Features:



### ▲ Designate Proper Finish Suffix



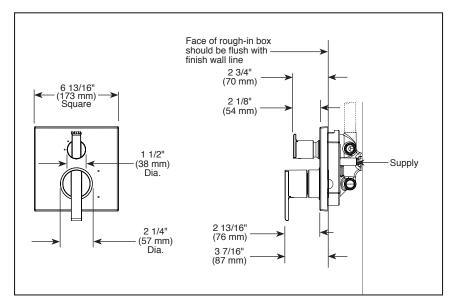

# see what Delta can do

# INTEGRATED SHOWER DIVERTER TRIM

- Angular Modern Valve Trim with Three Function Diverter (T24867)
- Angular Modern Valve Trim with Six Function Diverter (T24967)

#### **FEATURES:**

- Monitor® 14 Series pressure balanced single function bath mixing valve trim
- Three or six function diverter

#### **STANDARD SPECIFICATIONS:**

- Main control utilizes single-function pressure balanced cartridge.
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice<sup>®</sup> Universal rough valve body. (R22000 Series)
- Top handle controls diverter functions.
- Bottom handle controls on/off and temperature.
- Field adjustable to limit handle rotation into hot water zone.
- Bottom handle 120° Maximum rotation.
- Red/Blue indicator markings.
- Three function diverter for 2 individual positions, 1 shared position.
- For two individual functions, no shared functions, order additional RP71717.
- Six function diverter for 3 individual positions, 3 shared positions.
- For three individual functions, no shared functions, order additional RP71718.
- Cartridges included.
- Standard installation allows up to 11/8" finished wall thickness.
- Thick wall installation kit (RP90542▲) can be ordered to allow for up to 2 1/8" finished wall thickness.

## **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

# **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1

#### Maximum Flow Rate Guide

Maximum Flow Nate Guide						
Rough	Cartridge	Outlet	40 psi	60 psi	80 psi	
R22000	14S	Shower	4.1 gpm	5.0 gpm	5.8 gpm	
R22000-WS	14S	Shower	3.9 gpm	4.8 gpm	5.6 gpm	

Based on 6 Setting Diverter

**Delta Faucet Company** 

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2018 Delta Faucet Company