


Submitted Model No.: Specific Features:



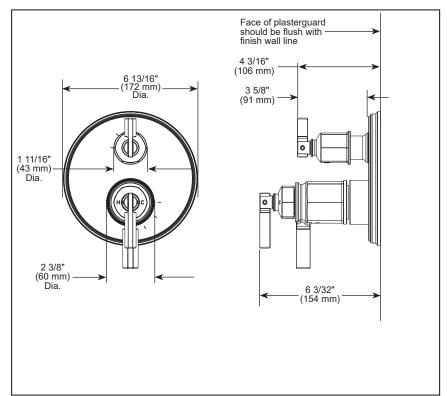

▲Designate Proper Finish Suffix

BRIZO

TEMPASSURE® THERMOSTATIC VALVE WITH INTEGRATED **DIVERTER TRIM**

- Invari[™] Bath Collection
- MultiChoice® Valve Trim with Three Function Diverter

FEATURES:

• TempAssure® thermostatic valve cartridge

STANDARD SPECIFICATIONS:

- Main control utilizes TempAssure® thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to ±3.6° F.
- Back-to-back installation capability
- For use with MultiChoice® Universal Integrated Shower Diverter Rough (R75000 Series)
- Max. system flow rate 7.2 gpm @ 60 psi with R75000
- Top handle controls diverter functions.
- Bottom (2) handles control volume and temperature.
- Field adjustable to limit temperature handle rotation into hot water zone.
- Bottom volume handle 90° maximum rotation.
- · Hot/cold indicator markings.
- Three function diverter has 2 individual positions and 1 shared position.
- For two individual functions, no shared functions, order additional RP72123.
- 1/2" rough-in.
- Cartridges included.
- Standard installation allows up to 11/8" finished wall thickness.
- Thick wall installation kit RP90545 ▲ can be ordered to allow for up to 2 1/8" finished wall thickness.

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

• ASME A112.18.1/ CSA B125.1 Indicates compliance to ICC/ANSI A117.1