

### FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Pressure balancing cycle valve design with an adjustable temperature limit stop
- 1/2" IPS/CC connections
- Includes valve, showerhead, tub spout, arm and flange

### OPERATION

- Lever style handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3° F (± 2° C)

### FLOW

- Showerhead is limited 1.75 gpm (6.7 L/min) at 45 psi

### CARTRIDGE


- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

### STANDARDS

- Third party certified to meet ASSE 1016, ASME A112.18.1/ CSA B-125.1, and all applicable requirements referenced therein
- Meets Watersense® criteria
- ADA ♿ for lever handle
- Meets New York City Local Law No. 57
- Products marked with 1.75 gpm are compliant with Watersense®, and California water efficiency regulations


### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

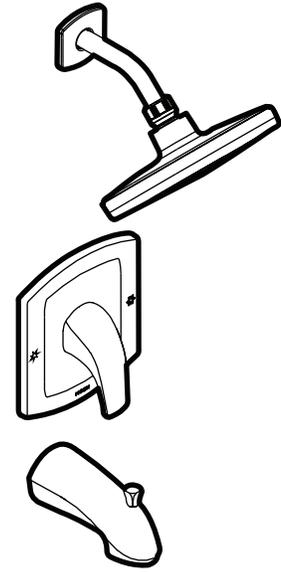

**ZARINA™  
Posi-Temp®  
Single-Handle Tub/Shower**

MODEL: 82533 series

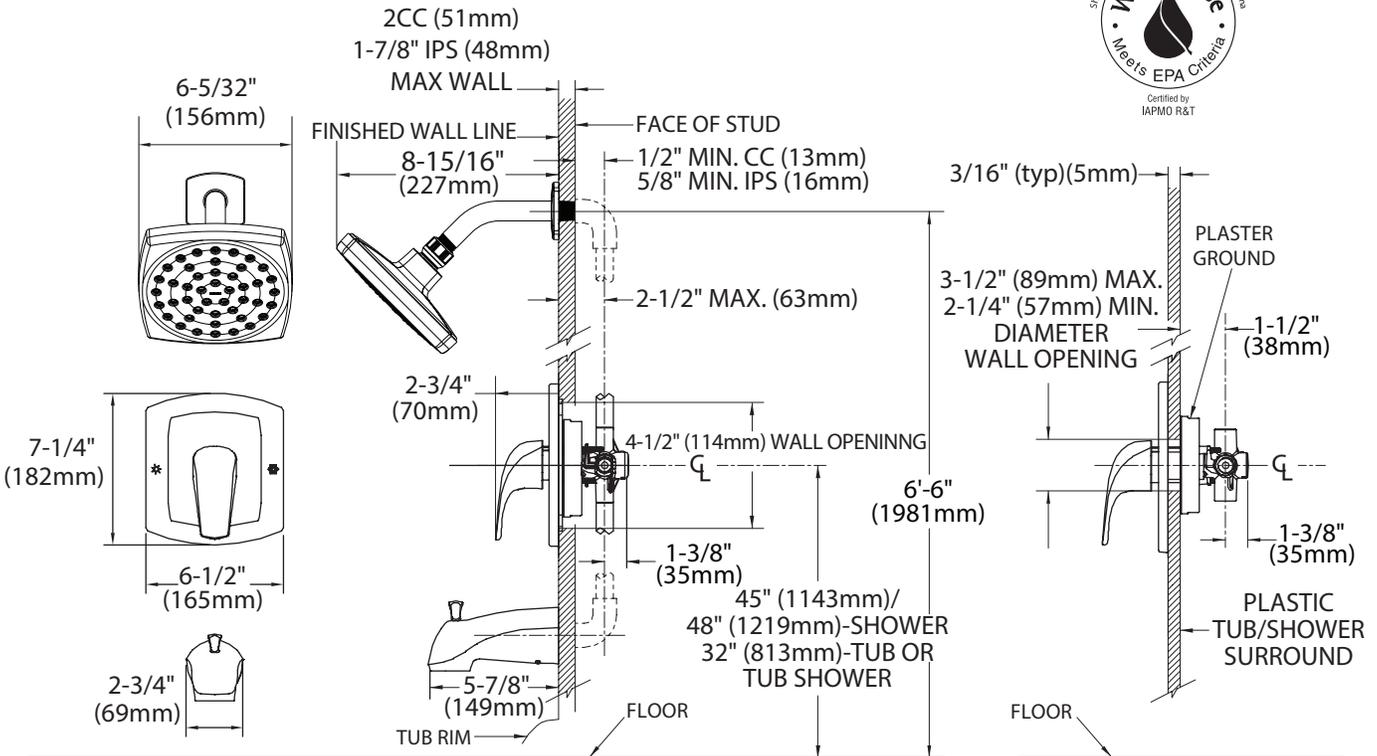

## CRITICAL DIMENSIONS

(DO NOT SCALE)