


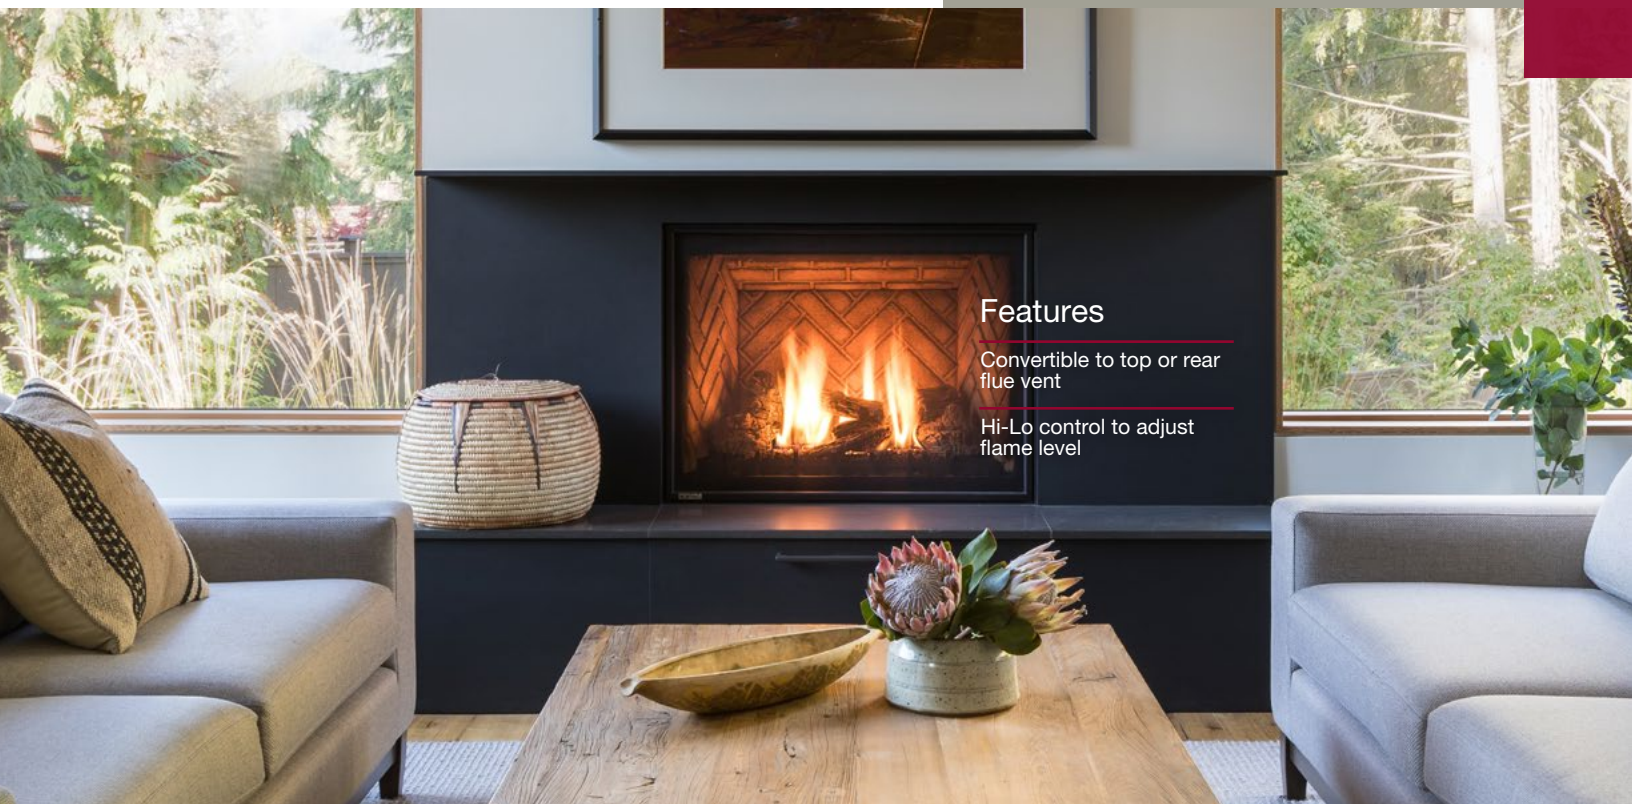

Features

Convertible to top or rear flue vent

Hi-Lo control to adjust flame level

DIVINE

SINGLE SIDED

SPECIFICATIONS AND FEATURES

H38, HL38, HW38 Wildfire

Single sided
Direct vent

QUICK DIMENSIONS

H*38	UNIT	FRAM.
F.WIDTH	39 ⁵ / ₁₆	37 ³ / ₄
B.WIDTH	24 ⁷ / ₈	37 ³ / ₄
HEIGHT	38 ⁵ / ₁₆	42
DEPTH	18 ¹ / ₄	21 ¹ / ₈
VIEWING	35 ¹ / ₄ × 26 ⁷ / ₈	

H38 TRADITIONAL

Standard

Traditional burner and logset

Options

Various traditional liners

River rock kit [NG only]

Fans with speed control

Surrounds in satin black or stainless steel

Full function remote control for flame modulation

HL38 CONTEMPORARY

Standard

Contemporary burner with Sage firebeads

Options

Speckled stones, firestones, firebeads or fireglass

Fans with speed control

Surrounds in satin black or stainless steel

Full function remote control for flame modulation

HW38-2 DELUXE WILDFIRE

Standard

Wrought iron grate

Herringbone brick with designer logset

Full function remote control for flame modulation

Options

Fans with speed control

Black porcelain liner

Surrounds in satin black or stainless steel

BTU LISTING

H38DF** / 26,000
HL38DF** / 25,000
HW38DFN*-2 / 34,000
HW38DFL*-2 / 30,000

EFFICIENCY

H38DFN / FE 55
H38DFL / FE 55
H38DFNI / FE 56

H38DFLI / FE 56
HL38DFN / FE 55
HL38DFL / FE 54

HL38DFNI / FE 56
HL38DFLI / FE 55

HW38DFNI-2 / FE 64
HW38DFLI-2 / FE 65




H34 / STAINLESS SURROUND



HLB34 / SATIN BLACK SURROUND

H38 DIMENSIONS

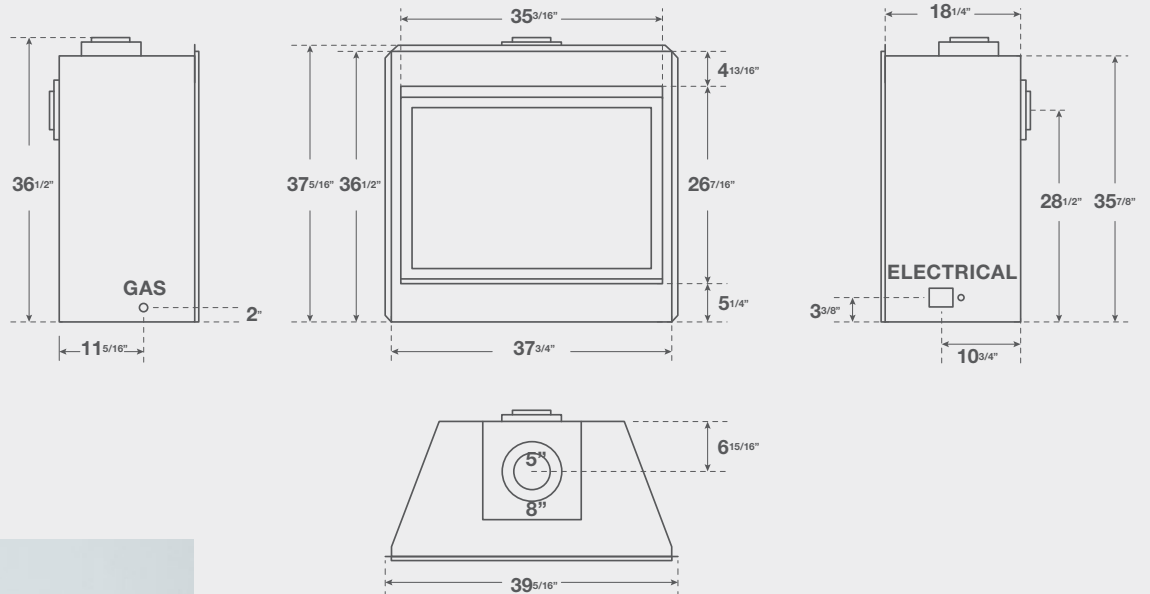

MONTIGO / DIVINE / HL38DFNI / SAGE FIREBEADS



MONTIGO / DIVINE / H38 / TRADITIONAL LOGSET


OPTIONS & FEATURES




REMOTE^Δ
RX200**



WALL REMOTE
REC1493




IRON GRATE[†]
HWIG38



RIVER ROCK[†]
RBHR38R

[†]Optional for H38 only
[‡]Not available for HW38
^ΔOptional for HW38 only
^ΔStandard on HW38DF*1-2


LINERS



HERRING BONE^{†Δ}
HBK38H



COLONIAL[†]
HBK38C



HERITAGE[†]
HBK38R



BLACK GLASS[†]
RGPH38



BLACK PORCELAIN^Δ
PPHW38

Unit Specifications

Icon Legend

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED

◊

STANDARD

◦

	BTU Natural Gas	BTU Liquid Propane	Venting	Clearance Top - Rear vent	Clearance Top - Top vent	Clearance Sides	Clearance Back	Clearance Floor	Front viewing area	Front glass type	Standard media	Invisimesh screen	Powervent	Remote control	Fans	Uplighting	Downlighting
H34DF*	18,000	18,000	4"/7"	9	17½	1	2	0	31⅝x22¾	Tempered	Traditional	◦	+	◦	◦	-	-
HLB34DF*	18,000	18,000	4"/7"	11	17½	1	2	0	31⅝x22¾	Tempered	HW1082	◦	+	+	+	-	-
HLB34DF*-2	18,000	18,000	4"/7"	11	17½	1	2	0	31⅝x22¾	Tempered	Speckled	◦	+	◦	◦	-	-
H38DF*	26,000	26,000	5"/8"	9	17½	1	2	0	35¼x26¾	Tempered	Traditional	◦	+	+	+	-	-
HL38DF	26,000	26,000	5"/8"	9	17½	1	2	0	35¼x26¾	Tempered	HW1082	◦	+	+	+	-	-
HW38DF	34,000	30,000	5"/8"	9	17½	1	3	0	35¼x26¾	Neoceramic	Wildfire	◦	+	◦	+	-	-
H42DF*	34,000	32,000	5"/8"	9	17½	1	1	0	39⅞x30⅞	Tempered	Traditional	◦	+	+	+	-	-
HL42DF	34,000	32,000	5"/8"	9	17½	1	1	0	39⅞x30⅞	Tempered	HW1082	◦	+	+	+	-	-
HW42DF	34,000	32,000	5"/8"	9	17½	1	1	0	39⅞x30⅞	Tempered	Wildfire	◦	+	◦	+	-	-
H36PV	55,000	N/A	5"/8"	9	17½	1	1	0	38½x31½	Tempered	Traditional	◦	◊	+	-	-	-

DIVINE FRAMING

	A	B	C	D	E	F
H34	39	20	33⅝	40	56¼	0
H36	50	24	46	61¼	81	1
H38	42	21⅝	33⅝	43¾	62	0
H42	46½	21⅝	42	48⅞	68	0

See instruction manual for detailed instructions

Header on edge not required if framing meets clearance to venting

FRAMING DIMENSIONS

