
Location: SYMMONS Canterbury®

H321-V, H301-V Hand Shower /Slide Bar Assembly **Specification Submittal**





Model, H321-V Model, H301-V

		, , , , , , , , , , , , , , , , , , , ,
Model Numbers		Feature Highlights
☐ H321-V ☐ H301-V	Hand Shower with slide bar Hand Shower without slide bar for mounting to the wall	 1 mode hand shower unit 2-3/4" diameter Dual checks for backflow protection 30" slide bar with cradle for hand shower mounting (model H321-V) Cradle for hand shower mounting (model H301-V) Standard flow rate is 2.0 gpm (7.6 L/min) Optional lower flow rate restrictor available Polished chrome finish (standard)
Options/ Modifications		-
□ 1.5	1.5 gpm (5.7 L/min) flow restrictor	
☐ STN	Satin Nickel finish	
□ 72	72" hose in place of 60" hose	
□ МВ	Matte Black finish	
□ ВВΖ	Brushed Bronze finish	
Note: Append appropriate -suffix to model number.		Warranty
Compliance		Limited Lifetime - to the original end purchaser in consumer/residential installations.
- ASME A112.18.1/CSA B125.1		10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.


Architectural/ Engineering Specification

Symmons Hand Shower and Slide Bar Assembly ______ Includes 1 mode hand shower unit, 2-3/4" diameter, Dual checks for backflow protection, 30" slide bar with cradle for hand shower mounting (model H321-V), Cradle for hand shower mounting (model H301-V), Standard flow rate is 2.0 gpm (7.6 L/min), Optional lower flow rate restrictor available, Polished chrome finish (standard). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish", "72 - 72" hose in place of 60" hose", "MB - Matte Black finish", "BBZ - Brushed Bronze finish".



H321-V, H301-V

Dimensions

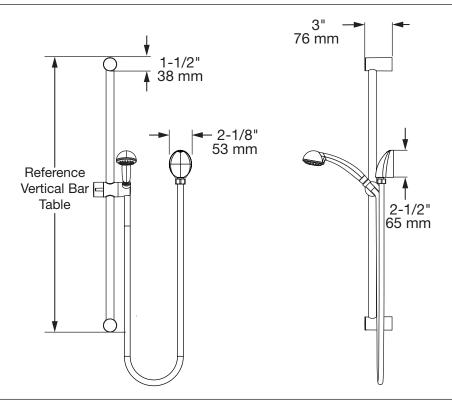

Vertical Bar		
Length	Drawing Dimension	
30"	30" (762 mm)	
48"	48" (1219 mm)	

Note: Dimensions subject to change without notice.

