

# SharkBite Max™

## Coupling

SharkBite Max™ allows users to connect pipe with ease - no tools needed. This new design features a stainless steel retainer for extra strength, higher pressure ratings (250 psi) and a lower insertion effort than previous versions of SharkBite Brass Push-to-Connect fittings. SharkBite Max fittings do not require a PEX stiffener and are compatible with PEX, copper, CPVC, PE-RT and HDPE\*.

### Applications

Residential and commercial potable water, recirculation, hydronic heating/cooling (up to 50% glycol concentration) and direct burial (wrapping required).

### Specification Data

Materials	
Body	Lead-Free DZR Brass
O-ring	EPDM
Steel Retainer	304 Stainless Steel
Grab Ring	316 Stainless Steel


Pipe Insertion Depth		Performance	
Fitting Size	Insertion Depth	Max Working Pressure	
1/2"	1.00 in.	Max Pressure	250 psi
3/4"	1.25 in.	Max Temperature	200°F (93°C)

### Certifications & Listings

ASSE 1061, CSA B125.3, NSF/ANSI 14,  
NSF/ANSI/CAN 61, NSF/ANSI/CAN 372,  
ASTM E84, CAN/ULC S102.2, UL 263,  
ASTM E119, CAN/ULC S101

For listing information, please contact Customer Service

\* HDPE installations must use a tube stiffener. Sold separately by HDPE manufacturer.

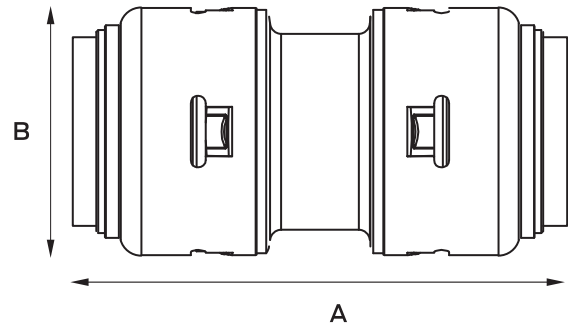

Dimensions (inches)			
Part #	Size	A	B
UR008	1/2"	2.1	1.0
UR016	3/4"	2.6	1.3

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	