

TOTO®

CT426CFGT40#01 BOWL ONLY
~~CWT4263084CMFG~~

AP WASHLET®+ ~~C5 Wall-Hung Toilet~~, 1.28 GPF & 0.9 GPF

FEATURES

AP Bowl

- DYNAMAX TORNADO FLUSH® system, high efficiency (1.28GPF/0.9GPF)
- CEFIONTECT® ceramic glaze - prevents debris, mold from sticking to ceramic surfaces
- Universal Height
- Elongated shape front bowl

WASHLET+ C5

- Contemporary lid design
- Elongated front WASHLET
- Mounting hardware included

DuoFit In-Wall Tank

- Dual flushing system, high-efficiency (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF) Avg. flush 1.03 GPF
- Adjustable 15"-19" mounting height
- Saves up to 9" of floor space compared to standard floor-mounted toilet
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper supply line

Push Plate

- YT930#MS
Matte Silver Basic Round Push Plate


KIT COMPONENTS

- CT426CFGT40#01
AP Wall-Hung Toilet
- ~~WT173M~~
~~In-Wall Tank System (Copper Pipe)~~
- ~~SW3084T40#01~~
~~C5 WASHLET~~
~~Elongated WASHLET~~
- ~~THU805~~
~~WASHLET connection kit~~
- ~~YT930#MS~~
~~Matte Silver Basic Round Push Plate~~

Available Options

- YT920#WH - White Matte Basic Square Push Plate
- YT920#MS - Matte Silver Basic Square Push Plate
- YT930#WH - White Matte Basic Round Push Plate
- YT970#SS - Stainless Steel Wall Round Push Plate
- YT980#SS - Stainless Steel Wall Round Push Plate

*NO WASHLET

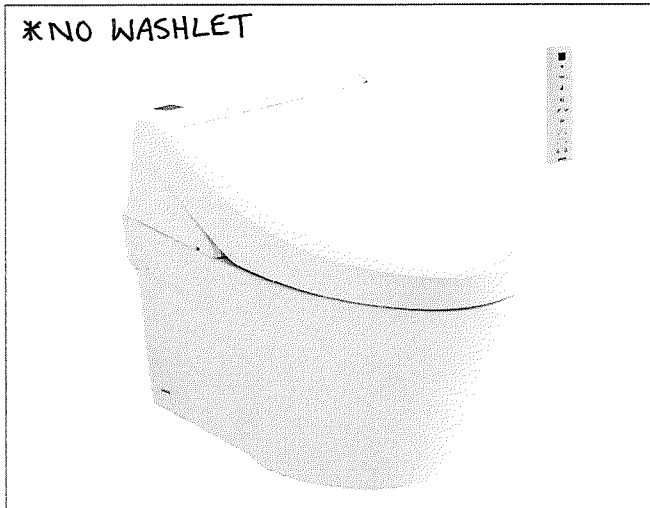

**DYNAMAX
TORNADO FLUSH**



Skirted Design



CEFIONTECT

COLORS/FINISHES

- Standard
#01 Cotton

CODES/STANDARDS

- Meets or exceeds:
 - Bowl: ASME A112.19.2/CSA B45.1, ASME A112.19.14
 - Carrier System: ASME A112.6.2
 - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC), EPA WaterSense State of Massachusetts, City of Los Angeles and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



