



see what Delta can do™

H₂OKINETIC HAND SHOWER

■ 3-Spray Setting Hand Shower

FEATURES:

- Touch-Clean® Nozzles
- H₂Okinetic® PowerDrench Spray
- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Certified dual check valves for backflow protection
- Change spray modes with pushbutton
- Hand held shower with three spray settings - pause is a non-positive shut-off
- 60"- 82" (1524 mm-2083 mm) stretchable metal hose
- 24" (610 mm) wall bar with adjustable slide - 51799 only
- Wall mount bracket for hands-free showering - 55799 only
- Lumicoat™ is not applied to the slide bar or shower hose

WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1 ♦
- ASME A112.18.3
- EPA WaterSense®

- ♦ Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

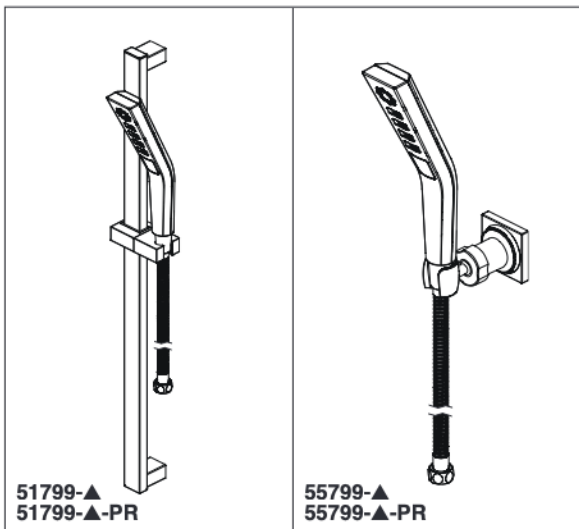

Submitted Model No.: _____

Specific Features: _____

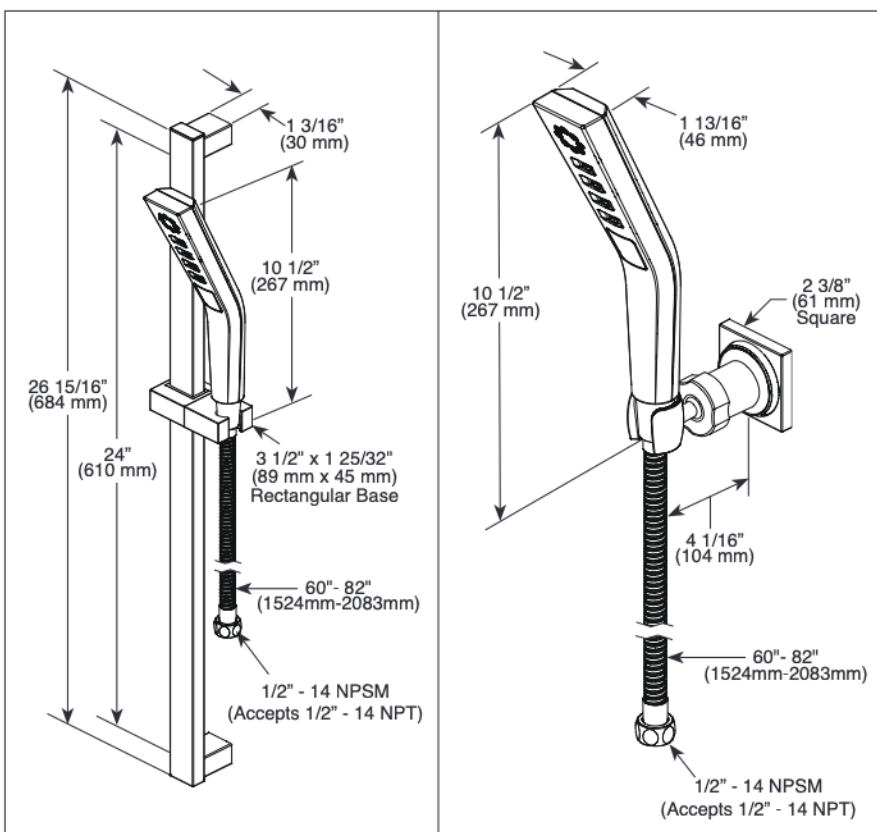

▲ Designate proper finish suffix