

# Location:



9601-PLR, 9601-PLR-TRM, 9601PLRTRMTC

Shower Trim


## Specification Submittal

Model Numbers	Feature Highlights
<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>9601-PLR</b> Shower Trim with Temptrol Pressure Balancing Shower Valve</li> <li><input type="checkbox"/> <b>9601-PLR-TRM</b> Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately</li> <li><input type="checkbox"/> <b>9601PLRTRMTC</b> Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap</li> </ul>	<ul style="list-style-type: none"> <li>• Origins Shower System or Trim</li> <li>• Requires Temptrol® Pressure Balancing Shower Valve (included with 9601-PLR)</li> <li>• Adjustable stop screw to limit handle turn (included with 9601-PLR)</li> <li>• Metal lever handle</li> <li>• 1 mode showerhead with easy to clean nozzles</li> <li>• 2.0 gpm (7.6 L/min) flow restrictor</li> <li>• Tub spout not included</li> <li>• Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li> <li>• Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9601PLRTRMTC)</li> </ul>
Options/ Modifications	
<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>1.2</b>  <b>1.2 gpm (4.5 L/min) flow restrictor</b></li> <li><input type="checkbox"/> <b>1.5</b>  <b>1.5 gpm (5.7 L/min) flow restrictor</b></li> <li><input type="checkbox"/> <b>1.75</b>  <b>1.75 gpm (6.6 L/min) flow restrictor</b></li> <li><input type="checkbox"/> <b>STN</b> <b>Satin Nickel finish</b></li> <li><input type="checkbox"/> <b>L1</b> <b>Less showerhead</b></li> <li><input type="checkbox"/> <b>L7</b> <b>Less handle</b></li> <li><input type="checkbox"/> <b>VP</b> <b>Vandal resistant escutcheon screws in place of standard screws</b></li> <li><input type="checkbox"/> <b>STN</b> <b>Satin Nickel finish</b></li> <li><input type="checkbox"/> <b>B</b> <b>Back plate and bolts for extra thick walls</b></li> </ul> <p><b>Note:</b> Append appropriate -suffix to model number.</p>	<h3>Warranty</h3>
Compliance	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 
<ul style="list-style-type: none"> <li>- ASME A112.18.1/CSA B125.1</li> <li>- WaterSense @ 2.0 gpm/1.75 gpm/1.5 gpm</li> <li>- Buy American Act (9601-PLR only)</li> </ul>  	

## Architectural/ Engineering Specification

Symmons Origins Shower Trim \_\_\_\_\_ Includes Origins Shower System or Trim, Requires Temptrol® Pressure Balancing Shower Valve (included with 9601-PLR), Adjustable stop screw to limit handle turn (included with 9601-PLR), Metal lever handle, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9601PLRTRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense @ 2.0 gpm/1.75 gpm/1.5 gpm compliant. Available options: "1.2 - 1.2 gpm (4.5 L/min) flow restrictor", "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow restrictor", "STN - Satin Nickel finish", "L1 - Less showerhead", "L7- Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "B - Back plate and bolts for extra thick walls".

## Dimensions

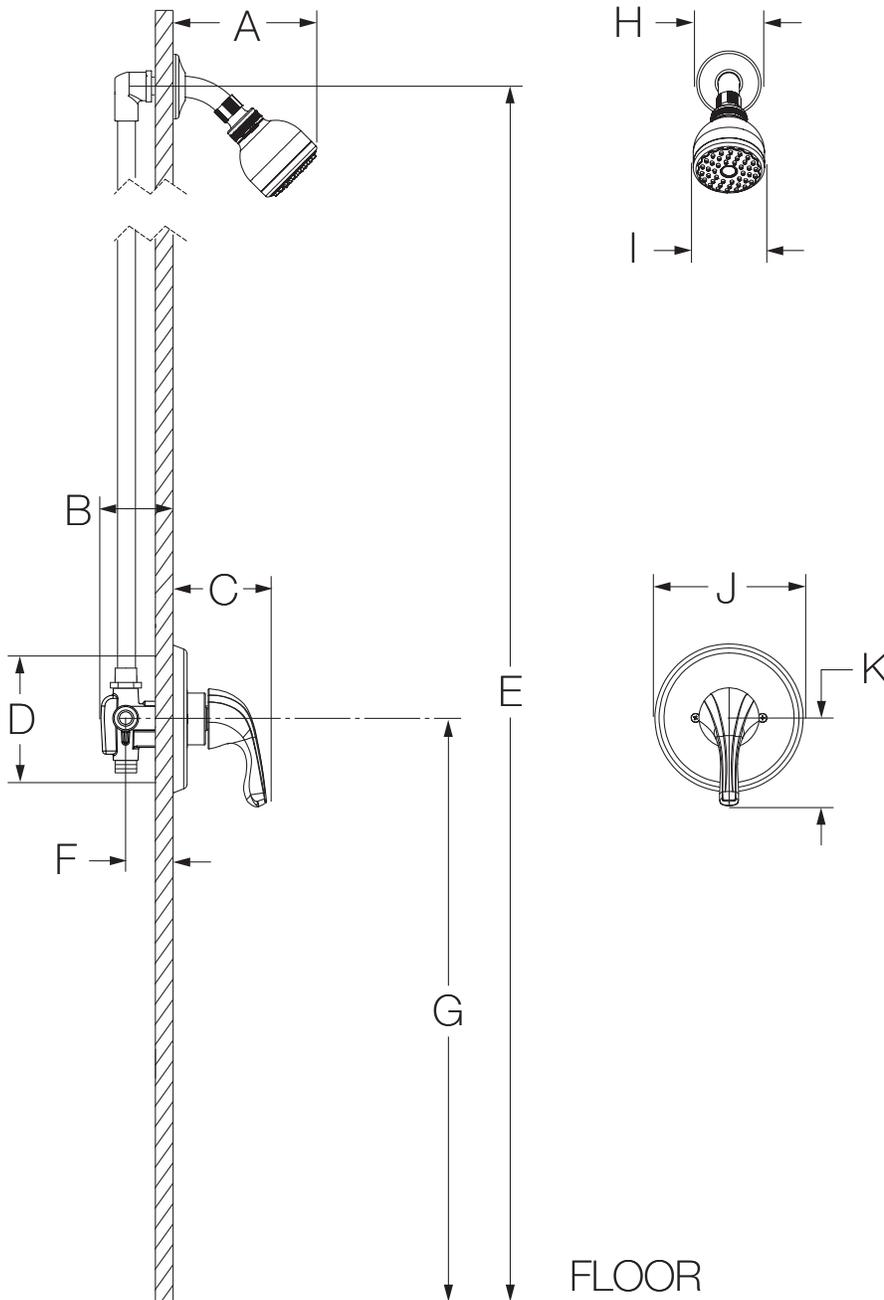

Measurements	
<b>A</b>	6-3/8", 162 mm
<b>B</b>	3-1/2", 89 mm
<b>C</b>	3-5/8", 92 mm
<b>D</b>	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
<b>E</b>	Ref. 77", 1956 mm
<b>F</b>	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
<b>G</b>	Ref. 42", 1067 mm
<b>H</b>	Ø 2-1/2", 64 mm
<b>I</b>	Ø 2-3/4", 70 mm
<b>J</b>	Ø 5-3/4", 146 mm
<b>K</b>	3-3/8", 86 mm

### Notes:

- 1) Dimensions subject to change without notice.