

Location:



3606-H321-V-TRM, 3606H321TRMTC
Tub/Shower/Hand Shower Trim
Specification Submittal



Feature Highlights

- Duro Tub/Shower/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve
- Requires Symmons Triple Outlet Diverter Valve
- Metal lever handle
- 30" slide bar for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- 7" non-diverter tub spout
- 1 mode hand shower wand
- Standard 2.0 gpm (7.6 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3606H321TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Model Numbers

- 3606-H321-V-TRM**
Tub/Shower/Hand Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve and Symmons Triple Outlet Diverter valve ordered separately
- 3606H321TRMTC**
Tub/Shower/Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)



Options/Modifications

- 1.5**  **1.5 gpm (5.7 L/min) flow restrictor**
- BBZ** **Brushed Bronze finish**
- MB** **Matte Black finish**
- STN** **Satin Nickel finish**

Note: Append appropriate -suffix to model number.

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/Engineering Specification

Symmons Duro Tub and Shower and Hand Shower Trim _____ Includes Duro Tub and Shower and Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve, Requires Symmons Triple Outlet Diverter Valve, Metal lever handle, 30" slide bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 7" non-diverter tub spout, 1 mode hand shower wand, Standard 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3606H321TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish".

Dimensions

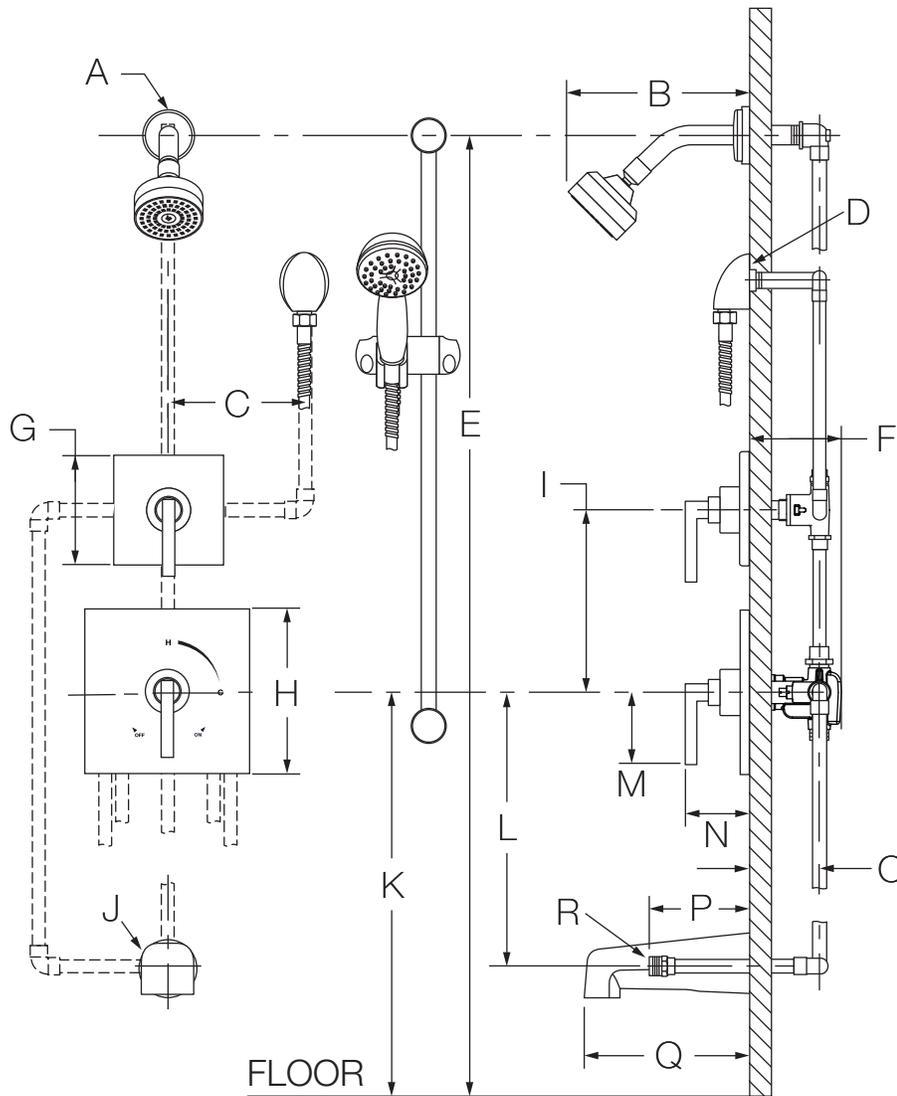

Measurements	
A	Ø 2-1/2", 64 mm
B	6", 152 mm
C	6", 152 mm
D	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
E	Ref. 77", 1956 mm
F	3-1/2", 89 mm
G	Sq. 5", 127 mm
H	Sq. 7-1/2", 191 mm
I	Ref. 10", 254 mm
J	Ø 2-1/2", 64 mm
K	Ref. 32", 813 mm
L	Ref. 12", 305 mm
M	3-1/8", 79 mm
N	3-1/2", 89 mm
O	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
P	5-1/4", 133 mm
Q	7", 178 mm
R	Male 1/2-14 NPT fitting must protrude 5-1/4" (133 mm) from finished wall

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see O as reference).
- 4) Dimensions subject to change without notice.