

Many **local and state plumbing codes** require the **condensate to be neutralized** prior to being discharged. Neutralized condensate **prevents the corroding of drain and sewer systems** while being more environmentally friendly. **Saniflo's products can accomplish this** by raising pH levels on harsh condensate from HVAC applications.

Increase your business with a quick and easy solution for the **removal and neutralization of condensate** from HVAC applications. With **these quiet condensate systems**, you can pump, neutralize or do both. Give your customers the ultimate solution.

The Saniflo condensate systems are **easy to inspect and service** making them the preferred brand for service companies as **these can be included in their maintenance service contracts**. By installing Saniflo systems, you easily **save money on expensive damages** caused to the plumbing, soil or sewer line because of harsh condensate.

# SANIFLO IS THE WAY TO GO!

## VISIT OUR WEBSITE

With especially dedicated space  
for your needs.

More complete and interactive  
than ever!

Follow us on social media  
to find out more about Saniflo!



For more information on the complete range of Saniflo products, please visit **saniflo.com** or **saniflo.ca** or simply give us a call.

### Sanicondens®



Part# 040

- Pumps condensate from HVAC systems

### Sanicondens® Best Flat



Part# 044

- Low profile condensate and neutralizer pump

### Sanineutral



Part# 043

- Neutralizes condensate from HVAC systems



Part# 042

- Saniflo's neutralizing granules neutralize the condensate by raising the pH levels of harsh condensate.

**Saniflo SFA** GROUP  
US 800-571-8191  
saniflo.com  
CDN 800-363-5874  
saniflo.ca  
**SANIFLO**

**Saniflo SFA** GROUP

Sanicondens®  
Sanicondens® Best Flat • Sanineutral

CONDENSATE  
P U M P S


# Sanicondens®

Part N° 040

Condensate pump for HVAC applications



- One of the most powerful and quiet condensate pumps on the market.
- This powerful pumping unit can be floor or wall mounted. It comes with provisions for a ready-to-wire connection to an external overflow switch.

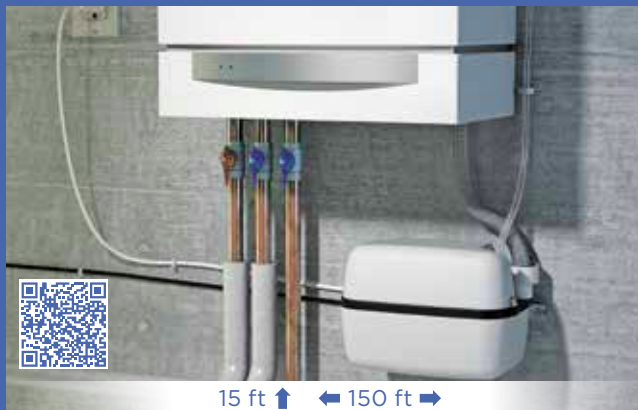

15 ft ↑ ← 150 ft →

**Discharge rate at 15':**

30 GPH

**Discharge rate at 3':**

86 GPH

**Capacity:**

0.5 gal. (1.9 liters)

**Power/Amperage:**


115V / 60 Hz / 1.5 A

**HP:**

1/30

**Operating temperature:**

160°F Max.

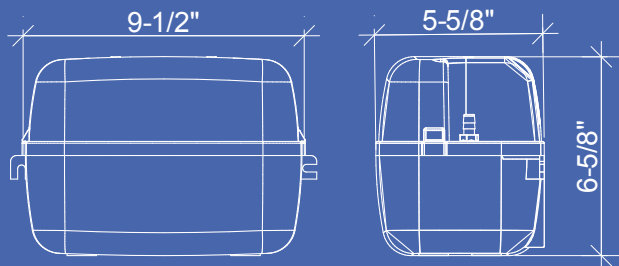


# Sanicondens® Best Flat

Part N° 044

Low profile condensate and neutralizer pump



- 2 in 1 system condensate pump with built-in neutralizer will neutralize harsh condensate from appliances up to 500,000 BTU/hour input.
- Comes with provisions for a ready-to-wire connection to an external overflow switch.

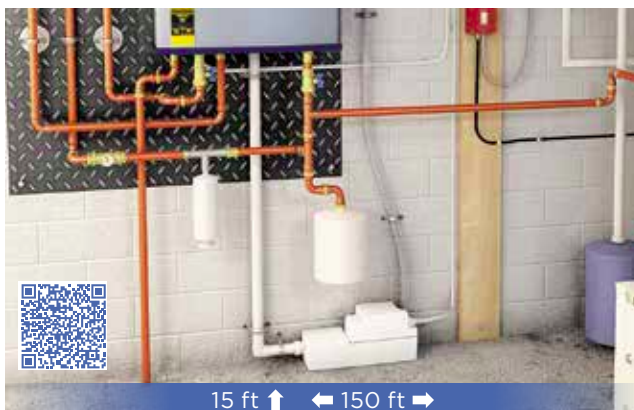

15 ft ↑ ← 150 ft →

**Discharge rate at 15':**

30 GPH

**Discharge rate at 3':**

86 GPH

**Capacity:**

0.9 gal. (3.4 liters)

**Power/Amperage:**


115V / 60 Hz / 1.5 A

**HP:**

1/30

**Operating temperature:**

160°F Max.

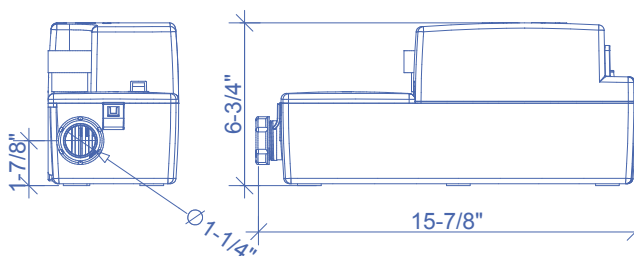

# Sanineutral

Part N° 043

Neutralize acidic condensate from condensing boilers, air conditioners, etc.



- Works without a pump or it can be placed before a Sanicondens or Sanicondens Best Flat.
- Easy to inspect and replace neutralizing granules.



**Operating temperature:**

160° F (Max)

**Boiler capacity:**

240,000 BTU/hr

**Boiler capacity:**

59 kW

**Connection diameter:**


1/2" or 3/4" PVC slip or barbed

**Net weight:**

3.7 Lbs

**Load:**

2.9 Lbs

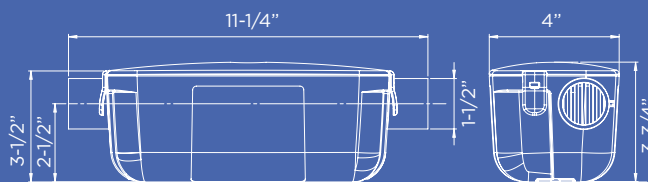

\*Standard warranty is two years from date of purchase. Registration is required for the a