

Liberty Pumps®



LEH200-Series



Year Warranty



High Head Sewage Pumps

2 hp
2" Solids-Handling
2" or 3" Flanged
Discharge
83' Maximum TDH

Features:

- Rugged 2 vane, closed cast iron impellers
- Cast iron housing and volute with all stainless fasteners
- 416 stainless steel rotor shaft
- Oil-filled, hermetically sealed motors
- Built-in thermal protection on single phase models
- 2" or 3" flanged discharge
- Permanently lubricated upper and lower ball bearings
- Dual shaft seals
- Quick-disconnect 25' standard power cord allows replacement of cord in seconds without breaking seals to motor

Models:

SINGLE PHASE

LEH202M 230V, 18a, manual

3-PHASE

LEH203M 208-230V, 13.2a, manual

LEH204M 440-480V, 6.6a, manual

LEH205M 575V, 5.5a, manual

LEH200-Series models require control panel for automatic operation. See sewage accessories literature for complete information on all simplex and duplex controls.

innovate. evolve.

LEH200-SERIES TECHNICAL SPECIFICATIONS

PUMP

The pump(s) shall be model _____ as manufactured by Liberty Pumps, Bergen, N.Y. or equal. The pump(s) shall have a capacity of _____ GPM at a total dynamic head of _____ feet. Motor size shall be 2 horsepower, _____ phase, 60 hz. and _____ volt operation.

MOTOR

The pump motor shall be class B of the submersible type, oil filled, and hermetically sealed. Single phase motors shall have thermal overload protection embedded in the windings, and shall automatically reset when motor cools. Three-phase motors shall have heatbreakers incorporated into the control panel, properly sized for the horsepower and amperage of the pump(s).

The rotor shaft shall be made of 416 stainless steel and shall be supported by upper and lower ball bearings.

The power cord shall be of the quick-disconnect design.

IMPELLER

The pump impeller shall be cast iron, 2 vane, closed, and shall be capable of passing a 2" spherical solid.

DUAL SHAFT SEAL

Upper seal shall be unitized silicon carbon and the lower seal shall be Viton double lip.

EXTERNAL CONSTRUCTION

The pump volute, legs and motor housing shall be heavy gray iron castings, class 25 or better. All castings shall be powder coated before assembly.

All fasteners shall be of 300-series stainless steel.

ALL MODELS: 2 HP, 3450 RPM

	MODELS	VOLTS	PHASE	AMPS	DISCHARGE
SINGLE PHASE	LEH202M2-2	230	1	18	2" FLANGED
	LEH202M3-2	230	1	18	3" FLANGED
3-PHASE	LEH203M2-2	208-230	3	13.2	2" FLANGED
	LEH203M3-2	208-230	3	13.2	3" FLANGED
	LEH204M2-2	440-480	3	6.6	2" FLANGED
	LEH204M3-2	440-480	3	6.6	3" FLANGED
	LEH205M2-2	575	3	5.5	2" FLANGED
	LEH205M3-2	575	3	5.5	3" FLANGED

NOTE: 25' cord standard on all models. 3-Phase models require panel for automatic operation. See sewage accessories literature for complete information on all simplex and duplex controls.

DIMENSIONAL DATA:

Weight: LEH202M: 95 LBS.


Height: 21"

Major Width: 13"

Maximum fluid temperature: 140 degrees F.

NOTE: LEH200-Series high-head pumps require a minimum head of 20'.

PERFORMANCE CURVE 60hz

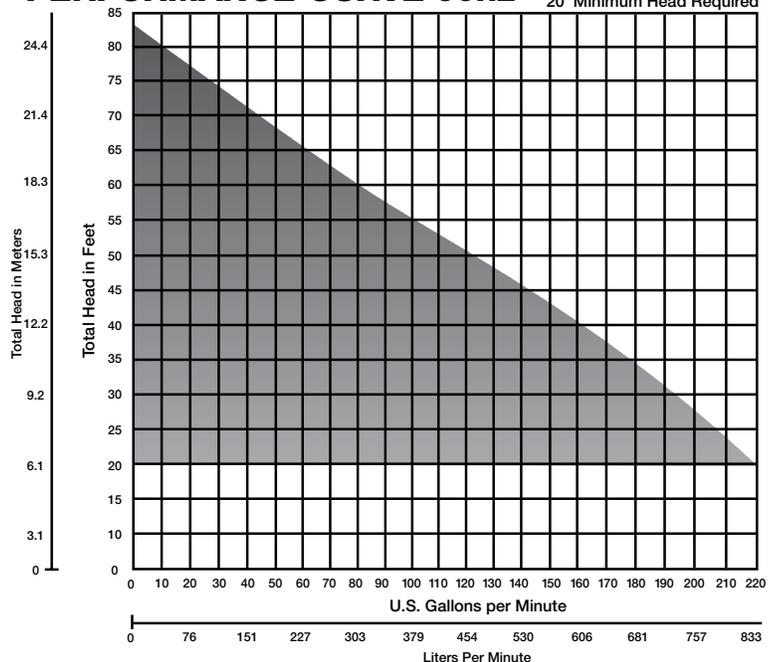

Specifications subject to change without notice.

Liberty Pumps • 7000 Apple Tree Avenue • Bergen, New York 14416 • Phone 800-543-2550 Fax (585) 494-1839

www.libertypumps.com

Copyright © Liberty Pumps, Inc. 2014
All rights reserved. LLIT 6641 R07/14