

### Features

- Flipstream™ technology uses a single sprayhead for four unique, experiential spray patterns; Koverage™, Kotton™, Komotion™, and Kurrent™
- Changing sprays is as easy as turning the head on its axis
- 2.5 gpm (9.5 lpm) maximum flow rate

### Installation

- 1/2 -14 NPT connection
- Shower arm and flange sold separately

### Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED™ Green Building Rating System

### Recommended Products/Accessories

K-7395 Shower Arm and Flange  
K-23723 Faucet cleaner



### Codes/Standards





ASME A112.18.1/CSA B125.1

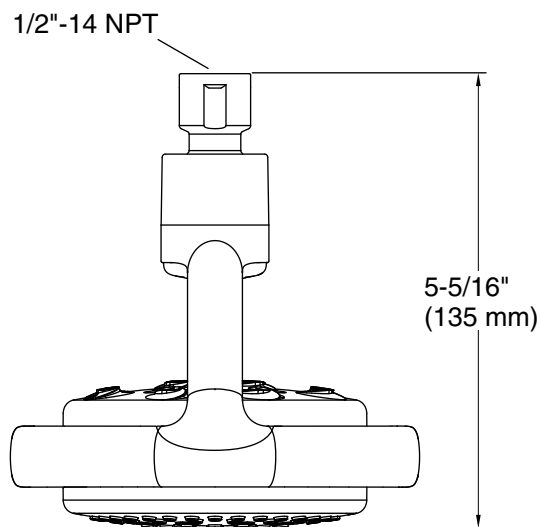
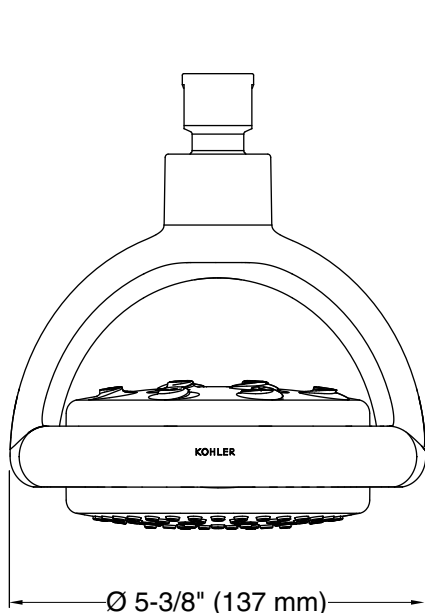
### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant™ Polished Nickel
	BN	Vibrant™ Brushed Nickel
	2BZ	Oil-Rubbed Bronze



### Technical Information

All product dimensions are nominal.

#### Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

### Notes

Install this product according to the installation guide.