KOHLER_®

Wellworth® Classic

Two-piece elongated 1.28 gpf toilet K-3575-RA

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- 1.28 gpf (4.8 lpf)
- Right-hand Polished Chrome trip lever
- Combination consists of the K-4436-RA tank and the K-4198 bowl
- Coordinates with other products in the Wellworth collection

Technology

- Single-flush gravity uses the force of gravity and a precisionengineered tank, bowl, and trapway to create a strong siphon during flushing
- KOHLERs canister flush valve harnesses the natural force of gravity and optimizes flushing performance
- Class Five® flushing technology offers virtually plug-free performance and rinsing power for a clean bowl

Installation

- Seat sold separately
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

Water Conservation & Rebates

Eligible for consumer rebates in some municipalities

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ elongated toilet seat K-5588 Purefresh® Elongated toilet seat K-4108 C³®-230 Elongated bidet toilet seat with remote control K-5420 Low-Profile Bolt Caps 1023457 1265114 K-23726 Drain treatment

Included Components

Product consists of: 4198 4436-RA Additional Components: Bolt cap accessory pack Tank accessory pack Tank cover Trip lever





Codes/Standards ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER[®] Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------


0	White
96	Biscuit





Wellworth® Classic

Two-piece elongated 1.28 gpf toilet K-3575-RA

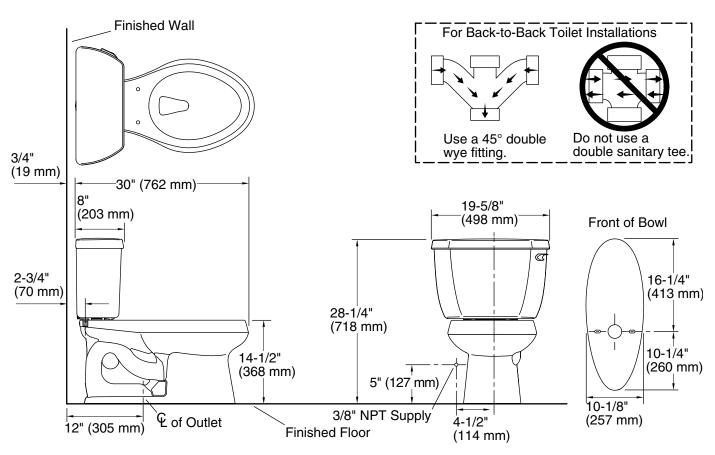

Technical Information

All product dimensions are nominal.

Floor-mount
Floor
Elongated
Class Five®
2-1/8" (54 mm)
1.28 gpf (4.8 lpf)
11-1/4" x 8-1/4" (286 mm x 210 mm)
5-1/4" (133 mm)
12" (305 mm)
5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

